



400 Gbps Net Bitrate Optical-Amplification-Free TFLN-based PAM4 Link Enabled by BU-LSTM Equalization

Downloaded from: <https://research.chalmers.se>, 2026-05-14 01:00 UTC

Citation for the original published paper (version of record):

Li, D., Ostrovskis, A., Osadchuk, Y. et al (2025). 400 Gbps Net Bitrate Optical-Amplification-Free TFLN-based PAM4 Link Enabled by BU-LSTM Equalization. 2025 European Conference on Optical Communications (ECOC). <http://dx.doi.org/10.1109/ECOC66593.2025.11263025>

N.B. When citing this work, cite the original published paper.

400 Gbps Net Bitrate Optical-Amplification-Free TFLN-based PAM4 Link Enabled by BU-LSTM Equalization

D. Li^{(1,2)*}, A. Ostrovskis^(3,4), Y. Osadchuk^(5,6), T. Jiang^(1,2), F. Da Ros⁽⁶⁾, C. Natalino⁽⁷⁾, D. Zibar⁽⁶⁾, R. Schatz⁽²⁾, L. Zhang⁽⁸⁾, X. Yu⁽⁸⁾, V. Bobrovs⁽³⁾, X. Pang^(8,3,2), O. Ozolins^{(3,2)**}

⁽¹⁾ Department of Applied Physics, KTH Royal Institute of Technology, 106 91 Stockholm, Sweden, *danl4@kth.se

⁽²⁾ RISE Research Institutes of Sweden, 16440 Kista, Sweden

⁽³⁾ Institute of Photonics, Electronics and Telecommunications, Riga Technical University, 1048 Riga, Latvia, **oskars.ozolins@rtu.lv

⁽⁴⁾ Keysight Technologies Deutschland GmbH, 71034 Böblingen, Germany

⁽⁵⁾ Centre for Digital and Computational Humanities, University of Copenhagen, Denmark

⁽⁶⁾ DTU Electro, Technical University of Denmark, DTU, 2800 Kongens Lyngby, Denmark

⁽⁷⁾ Department of Electrical Engineering, Chalmers University of Technology, Gothenburg, Sweden

⁽⁸⁾ College of Information Science and Electronic Engineering, Zhejiang University, Hangzhou, China

Abstract We use BU-LSTM equalization to demonstrate optical-amplification-free 400 Gbps net bitrate PAM4 link in O-band with TFLN-based MZM. BER below 6.25% overhead HD-FEC threshold for B2B and 500 m SMF transmission is achieved. ©2025 The Author(s)

Introduction

For the upcoming 1.6 Tbps era, intensity modulation and direct detection (IM/DD) systems using pulse amplitude modulation (PAM) have become the practical choice for short-reach applications, supporting up to 200 Gbps per lane [1]. However, IM/DD systems based on electro-optic (EO) modulators with limited bandwidth struggle to achieve net 400 Gbps per lane. Optical amplification is often used to meet power and margin requirements [2], but it increases system power consumption and cost. Therefore, optical-amplification-free designs have become crucial in short-reach IM/DD deployments [3]. To date, optical-amplification-free 400 Gbps gross rate transmission has only been demonstrated using electro-absorption modulated laser (EML) [3] and net rate using thin-film lithium niobate (TFLN)-based Mach-Zehnder modulator (MZM) [4,5].

TFLN-based MZMs have emerged as a promising solution, owing to their low loss, high EO bandwidth, and exceptional modulation efficiency [6-8]. While TFLN-based MZMs offer linear modulation, chromatic dispersion (CD) still affects transmission capacity even in the O-band [9]. In addition, PAM improves spectral efficiency but at the cost of increased nonlinear distortions, further limiting transmission performance. Therefore, to mitigate the nonlinear distortions and achieve the desired performance, applying high-performance equalization techniques is crucial.

Recently, neural networks (NNs) have been widely applied in IM/DD systems for equalization, showing higher performance over traditional equalizers, such as feed-forward (FFE) and decision feedback equalizers (DFE) in

compensating nonlinear impairments [10-12]. As an advanced variant of recurrent neural networks (RNN), long short-term memory (LSTM) is well-suited for sequential time-series data, making it highly effective for digital signal processing (DSP). However, most recently proposed LSTM-based models rely on shallow structures with a single hidden layer, limiting the data rate in IM/DD systems to 300 Gbps [13,14]. Deep LSTM architecture with stacked hidden layers was used for time series analysis, showing the ability to build hierarchical sequence representations progressively [15].

In this work, we use a stacked LSTM model (BU-LSTM) that combines bidirectional and unidirectional layers to enable an optical-amplification-free 400 Gbps net bitrate link. For 212.5 GBaud PAM4 signal, we achieve bit-error-ratio (BER) below 6.25% overhead (OH) hard-decision forward error correction (HD-FEC) threshold in transmission at back-to-back (B2B) and over 500 m single-mode fiber (SMF). The transmission employs PAM4 transmission using a TFLN-based MZM with 1 V_{pp} driving voltage operating in O-band. In [5], conventional FFE+DFE for B2B did not achieve BER below 6.25% OH HD-FEC threshold.

IM/DD Experimental Setup

The experimental setup is shown in Fig. 1(a). At the transmitter side, a pseudorandom bit sequence (PRBS) of over 1 million bits is generated offline using Mersenne Twister with a shuffled seed. The binary sequence is mapped to PAM4 symbols and reshaped using a root-raised cosine (RRC) filter with a 0.6 roll-off factor. The signal is

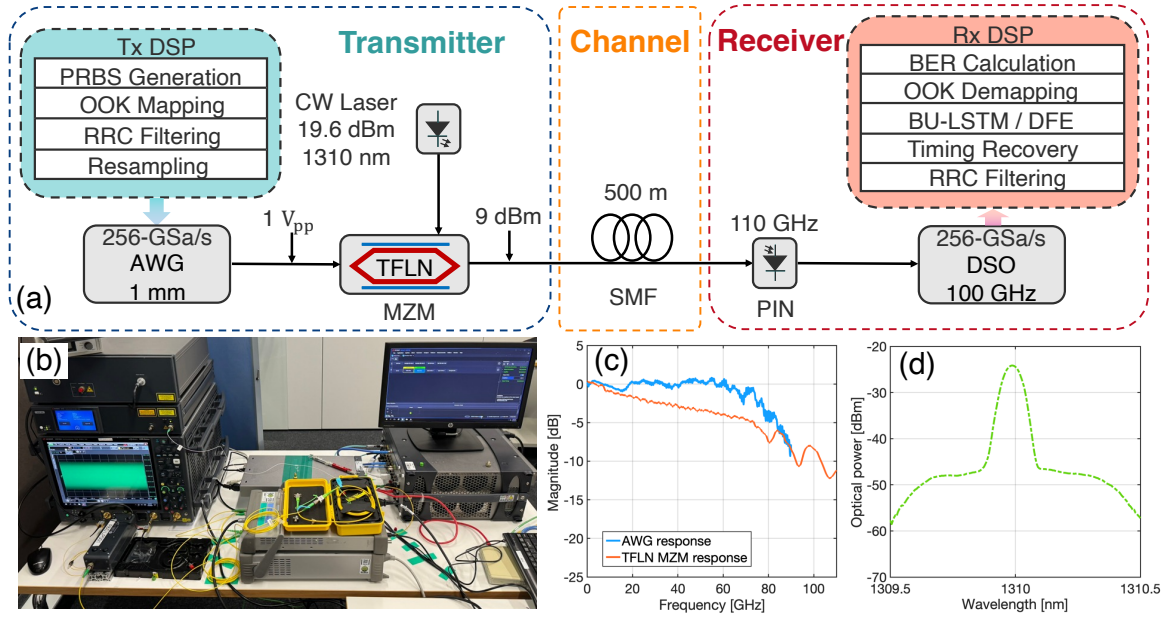


Fig. 1: (a) Experimental setup using TNLF-based MZM, (b) setup photo, (c) measured response of AWG and TFLN-based MZM, and (d) optical spectrum of 212.5 GBaud signal at 0.1 nm resolution.

then resampled to 256-GSa/s to match the arbitrary wave generator (AWG, Keysight M8199B). The AWG output swing is optimized $V_{pp} = 1$ V to achieve the best linearity for the PAM4 signal. The transmitter features a 1 mm single-ended connector compatible with high-speed AWG. The signal is fed into a TFLN MZM with $V_{pi} = 2$ V, driven by a high-power tunable laser emitting up to 19.6 dBm at 1310 nm in the O-band. When biased at the quadrature point, the MZM can achieve up to 9 dBm optical power. Fig. 1(c) shows the frequency responses of AWG and TFLN MZM, measured using a lightwave component analyzer (Keysight, N4372E). The signal is then transmitted over a 500 m single-mode fiber (SMF) without any optical amplification.

At the receiver side, the optical signal is directly detected using a 110-GHz PIN photodetector (PD) and digitized using a 110-GHz real-time digital storage oscilloscope (DSO, Keysight

UXR1104A) with 256-GSa/s sampling rate. The signal is then processed offline using DSP, including RRC filtering, timing recovery, BU-LSTM and FFE+DFE equalization, PAM4 demapping, and BER calculation. The optical spectrum at 0.1 nm resolution of modulated signal is shown in Fig. 1(d).

BU-LSTM Architecture

The architecture of an LSTM cell is shown in Fig. 2(a), which x_i represents the current input symbol, C_{i-1} and C_i are previous and updated memory states, h_{i-1} and h_i are previous and current hidden states, and σ is the “sigmoid” activation function of the LSTM cell, respectively. The BU-LSTM model is shown in Fig. 2(b), x_i symbols are processed by a bidirectional LSTM (bi-LSTM) layer with $n_{h1} = 40$ hidden units (20 forward and 20 backward) and a “tanh” activation function. The

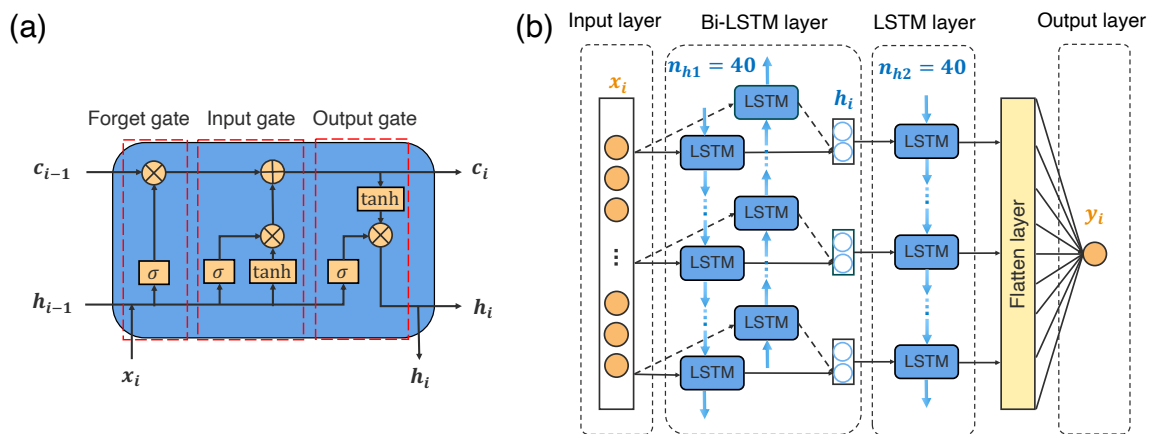


Fig. 2: Architecture of (a) LSTM cell, (b) BU-LSTM model.

hidden state \mathbf{h}_i integrates the flow of symbol information across consecutive symbols and then passes to an LSTM layer with $n_{h2} = 20$ hidden units and a “*tanh*” activation function. Finally, the output is flattened to a one-dimensional array in a flatten layer and fully connected to the output layer with a “*linear*” activation function, producing a single output \mathbf{y}_i .

The equalizer was trained on 2^{17} symbols and tested on 2^{15} symbols per each received optical power (RoP) value in a regression fashion. A Bayesian optimizer is used to select input normalization, activation functions, and batch size. The mean squared error is used as the loss function, and the Adam optimizer is applied with an adaptive learning rate ranging from 0.0001 to 0.04. The equalization is performed at one sample per symbol. The BU-LSTM is pre-trained at 8.5 dBm RoP in B2B and fine-tuned using transfer learning for other RoP levels.

Results and Discussion

Fig. 3(a) shows the BER as a function of input tap number for 212.5 GBaud PAM4 signal. Increasing taps improves BER but also raises the required training and inference time. To balance performance and computing time, 31 taps are selected for our model.

Fig.3(b) shows the BER results for different equalizers across various RoPs in B2B transmission. As a benchmark, the 31-tap BU-LSTM equalizer is compared with conventional 55-tap FFE + 55-tap DFE, 31-tap LSTM and 31-tap bi-LSTM. FFE + DFE achieves a BER of 8.1×10^{-3} at 8.6 dBm RoP, failing to meet the 6.25% OH HD-FEC threshold. The LSTM and bi-LSTM show comparable suboptimal performance with BERs of 4.95×10^{-2} and 5.64×10^{-2} , respectively. This is because LSTM lacks access to future symbols, while bi-LSTM does not maintain causal structure during inference. In contrast, BU-LSTM significantly outperforms all baselines, achieving a BER of 4.18×10^{-3} , which is below the 6.25% OH HD-FEC threshold of 4.5×10^{-3} . By combining a bidirectional layer with a unidirectional layer, BU-LSTM enables more effective mitigation of inter-symbol interference and nonlinear distortion.

BER versus RoPs after 500 m SMF transmission is shown in Fig. 3(c). Like B2B, FFE+DFE achieves a BER of 6.8×10^{-3} at 8.5 dBm RoP, while LSTM and bi-LSTM show BERs of 4.83×10^{-2} and 4.44×10^{-2} , respectively. The BU-LSTM maintains the lowest BER of 3.44×10^{-3} at 8.5 dBm RoP. The improvement in 500 m case is because the inherent chirp in the modulator interacts with chromatic dispersion in the system.

This work aims to show the effectiveness of our proposed BU-LSTM equalizer for assisting in

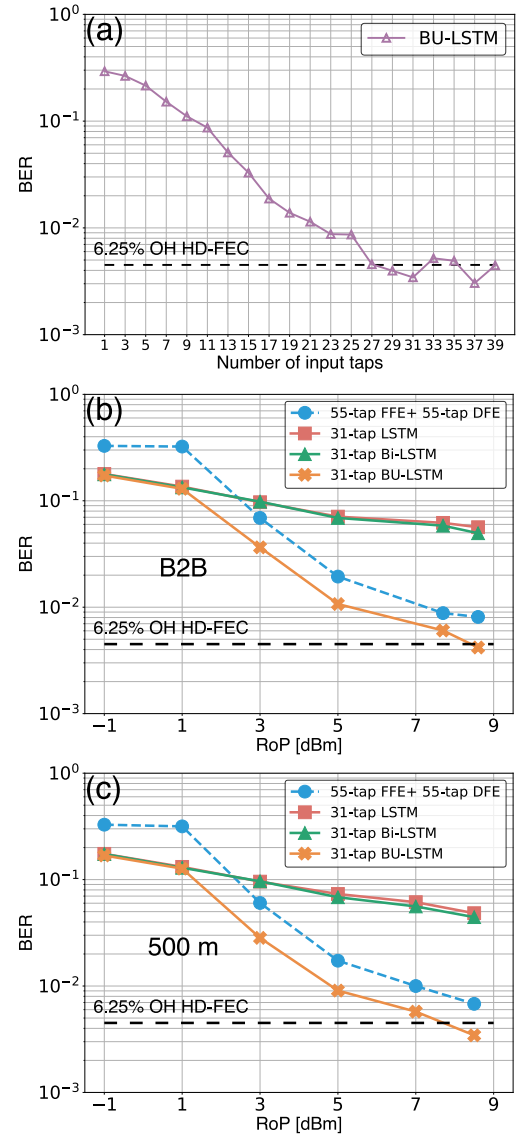


Fig. 3: BER versus (a) input taps number of BU-LSTM, (b) RoPs in B2B, and (c) RoPs after 500 m SMF transmission.

enabling 400 Gbps per lane IM/DD transmission. Complexity analysis, including hardware-specific considerations [16], is planned for future work.

Conclusions

In this work, we demonstrate a TFLN-based optical-amplification-free 212.5 GBaud PAM4 link, achieving a net bitrate of 400 Gbps with BER below the 6.25% OH HD-FEC threshold. The proposed BU-LSTM equalizer outperforms both conventional FFE+DFE and shallow LSTM models (LSTM and bi-LSTM), achieving BERs of 4.18×10^{-3} in B2B and 3.44×10^{-3} over 500 m SMF, respectively. Our work highlights the effectiveness of deep LSTM architecture in enhancing TFLN-based PAM4 IM/DD for ultra-high-speed transmission, enabling it as a promising low lane count solution for 1.6 Tbps short-reach interconnects.

Acknowledgements

We thank Keysight for hosting the experiment and for loaning the M8199B AWG, the UXR1104A Infiniium UXR-Series Oscilloscope, and Keysight reference transmitter. This work was supported in part by the China Scholarship Council (202308060346), in part by the National key R&D program of China (2022YFB2903800), in part by "Pioneer" and "Leading Goose" R&D Program of Zhejiang 2023C01139, in part by National natural science foundation of China under Grant 62101483, in part by the L郑 FLPP project 'DIMENSION' lzp 2024/1-0612, in part by the Swedish Research Council (VR) project 'BRAIN' 2022-04798, in part by the Sweden's Innovation Agency (VINNOVA) funded project (2024-02451), and the strategic innovation program Smarter Electronic Systems - a joint venture by Vinnova, Formas and the Swedish Energy Agency A-FRONTAHUL project (2023-00659).

References

- [1] S. Okuda, A. Uchiyama, T. Tsuji, Y. Hokama, K. Kihara, M. Shirao, T. Yamatoya, and Y. Yamauchi, "High-speed 340 Gbps PAM4 and 450 Gbps PAM6 Operations of Narrow High-Mesa EML," *2025 Optical Fiber Communication Conference (OFC)*, San Francisco, CA, USA, 2025, Tu2J.7.
- [2] M. Nakamura, T. Jyo, M. Nagatani, H. Wakita, M. Mutoh, Y. Shiratori, H. Taniguchi, A. Masuda, S. Yamamoto, F. Hamaoka, E. Yamazaki, H. Takahashi, T. Kobayashi, and Y. Miyamoto, "Net 582-Gb/s C-band and 4×526-Gb/s O-band IMDD Transmission Using Ultra-broadband InP-DHBT-based Electrical Mixer," in *European Conference on Optical Communication (ECOC 2024)*, Frankfurt, Germany, 2024, Th3B3.
- [3] O. Ozolins, A. Ostrovskis, T. Salgals, B. Krüger, F. Pittala, M. Joharifar, R. Schatz, D. Che, Y. Matsui, T. Dippon, M. Koenigsmann, Y. Fan, M. Chacinski, U. Westergren, L. Zhang, H. Mardoyan, S. Spolitis, S. Popov, X. Yu, M. Gruen, V. Bobrovs, H. Louchet, and X. Pang, "Optical Amplification-Free 310/256 Gbaud OOK, 197/145 Gbaud PAM4, and 160/116 Gbaud PAM6 EML/DML-based Data Center Links," *Optical Fiber Communications Conference (OFC 2023)*, San Diego, USA, 2023, DOI: [10.23919/OFC49934.2023.10117244](https://doi.org/10.23919/OFC49934.2023.10117244).
- [4] P. Zhu, Y. Yamaguchi, Y. Yoshida, P. T. Dat, M. Motoya, S. Takano, R. Shimizu, K. Akahane, and K.-i. Kitayama, "High-Speed Low-Complexity Optical PAM Links with a High-Slope-Efficiency Optical Modulator: Analysis and Demonstration," *Journal of Lightwave Technology*, vol. 42, no. 10, pp. 3554-3562, May 2024, DOI: [10.1109/JLT.2024.3366898](https://doi.org/10.1109/JLT.2024.3366898).
- [5] A. Ostrovskis, S. El-Busaidy, T. Salgals, M. Koenigsmann, K. Rubuls, B. Krüger, A. Sedulina, D. Cirjulina, F. Pittalà, L. Zhang, X. Yu, R. Puerta, S. Spolitis, R. Schatz, K. Gallo, H. Louchet, R. Jahn, K. Yamaguchi, M. Gruen, V. Bobrovs, M. Zeiler, X. Pang, and O. Ozolins, "Optical Amplification-Free 400 Gbps Net Biterate Links with a TFLN-based Transmitter," *2025 Optical Fiber Communication Conference (OFC)*, San Francisco, CA, USA, 2025, M1G.1.
- [6] E. Berikaa, M. S. Alam, W. Li, S. Bernal, B. Krueger, F. Pittalà, and D. V. Plant, "TFLN MZMs and Next-Gen DACs: Enabling Beyond 400 Gbps IMDD O-Band and C-Band Transmission," *IEEE Photonics Technology Letters*, vol. 35, no. 15, Aug. 2023, pp. 850-853, DOI: [10.1109/LPT.2023.3285881](https://doi.org/10.1109/LPT.2023.3285881).
- [7] C. St-Arnault, S. Bernal, D. Kita, R. Dickson, M. Y. Abdelaziz, A. Nikic, B. Qiu, B. Krueger, F. Pittalà, C. Reimer, B. Beggs, N. Ben-Hamida, and D. V. Plant, "Net 3.2 Tbps 225 Gbaud PAM4 O-Band IM/DD 2 km Transmission Using FR8 and DR8 with a CMOS 3 nm SerDes and TFLN Modulators," *2025 Optical Fiber Communication Conference (OFC)*, San Francisco, CA, USA, 2025, Th4B.1.
- [8] D. Che and X. Chen, "Single-wavelength 1.2-Tb/s IM-DD transmission by polarization-multiplexing three 160-GBd PAM-8 signals," *49th European Conference on Optical Communications (ECOC 2023)*, Glasgow, UK, 2023, Th.C.2.8, DOI: [10.1049/icp.2023.2668](https://doi.org/10.1049/icp.2023.2668).
- [9] D. Che and X. Chen, "Modulation Format and Digital Signal Processing for IM-DD Optics at Post-200G Era," *Journal of Lightwave Technology*, vol. 42, no. 2, pp. 588-605, Jan. 2024, DOI: [10.1109/JLT.2023.3311716](https://doi.org/10.1109/JLT.2023.3311716).
- [10] Y. Osadchuk, D. Li, A. Ostrovskis, T. Salgals, K. Rubuls, S. Spolitis, V. Bobrovs, D. Zibar, F. Da Ros, X. Pang, and O. Ozolins, "Adder Convolutional Neural Network Equalizer for RRM-based O-band Optical Amplification-free 200 GBd OOK Transmission," in *European Conference on Optical Communication (ECOC 2024)*, Frankfurt, Germany, 2024, W2A.119.
- [11] D. Li, Y. Osadchuk, A. Ostrovskis, T. Salgals, F. Da Ros, D. Zibar, L. Zhang, X. Yu, V. Bobrovs, X. Pang, and O. Ozolins, "256 Gbaud C-band RRM-based OOK Transmission Using CNN-GRU and Bi-LSTM Equalization," *2024 Asia Communications and Photonics Conference (ACP) and International Conference on Information Photonics and Optical Communications (IPOC)*, Beijing, China, Nov. 2024, pp. 1-5, DOI: [10.1109/ACP/IPOC63121.2024.10809708](https://doi.org/10.1109/ACP/IPOC63121.2024.10809708).
- [12] L. Zhang, J. Jie, and L. Mingche, "Adaptive parallel decision deep neural network for high-speed equalization," *Optics Express*, vol. 31, no. 13, p. 22001, Jun. 2023, DOI: [10.1364/OE.492127](https://doi.org/10.1364/OE.492127).
- [13] T.-Y. Hung, D. W. U. Chan, C.-W. Peng, C.-W. Chow, C.-H. Yeh, and H. K. Tsang, "300-Gbit/s/λ PAM8 Modulation with a Silicon Microring Modulator Using Long Short Term Memory Regression and Deep Neural Network Classification," *Optical Fiber Communication Conference (OFC 2024)*, San Diego, USA, 2024, DOI: [10.1364/OFC.2024.W4H.4](https://doi.org/10.1364/OFC.2024.W4H.4).
- [14] B. Sang, W. Zhou, Y. Tan, M. Kong, C. Wang, M. Wang, L. Zhao, J. Zhang, and J. Yu, "Low Complexity Neural Network Equalization Based on Multi-Symbol Output Technique for 200+ Gbps IM/DD Short Reach Optical System," *Journal of Lightwave Technology*, vol. 40, no. 9, pp. 2890-2900, May 2022, DOI: [10.1109/JLT.2022.3146863](https://doi.org/10.1109/JLT.2022.3146863).
- [15] Z. Cui, R. Ke, Z. Pu, and Y. Wang, "Stacked Bidirectional and Unidirectional LSTM Recurrent Neural Network for Network-wide Traffic Speed Prediction," arXiv preprint arXiv:1801.02143, 2018.
- [16] P. Freire, S. Srivallapanondh, B. Spinnler, A. Napoli, N. Costa, J. E. Prilepsy, and S. K. Turitsyn, "Computational Complexity Optimization of Neural Network-Based Equalizers in Digital Signal Processing: A Comprehensive Approach," *Journal of Lightwave Technology*, vol. 42, no. 12, pp. 4177-4201, Jun. 2024, DOI: [10.1109/JLT.2024.3386886](https://doi.org/10.1109/JLT.2024.3386886).