



## **A review of aerial manipulation of small-scale rotorcraft unmanned robotic systems**

Downloaded from: <https://research.chalmers.se>, 2025-04-29 19:07 UTC

Citation for the original published paper (version of record):

Ding, X., Guo, P., Xu, K. et al (2019). A review of aerial manipulation of small-scale rotorcraft unmanned robotic systems. *Chinese Journal of Aeronautics*, 32(1): 200-214.  
<http://dx.doi.org/10.1016/j.cja.2018.05.012>

N.B. When citing this work, cite the original published paper.



Chinese Society of Aeronautics and Astronautics  
& Beihang University

Chinese Journal of Aeronautics

cja@buaa.edu.cn  
www.sciencedirect.com



# A review of aerial manipulation of small-scale rotorcraft unmanned robotic systems

Xilun DING<sup>a</sup>, Pin GUO<sup>a,\*</sup>, Kun XU<sup>a</sup>, Yushu YU<sup>b</sup>

<sup>a</sup> Robotics Institute, Beihang University, Beijing 100083, China

<sup>b</sup> Department of Mechanics and Maritime Sciences, Chalmers University of Technology, Gothenburg 41296, Sweden

Received 19 October 2017; revised 10 January 2018; accepted 30 May 2018

Available online 22 June 2018

## KEYWORDS

Aerial manipulation;  
Mechanical structure design;  
Modeling and control;  
Research groups;  
Small-scale rotorcraft  
unmanned aerial systems;  
Trends and challenges

**Abstract** Small-scale rotorcraft unmanned robotic systems (SRURSs) are a kind of unmanned rotorcraft with manipulating devices. This review aims to provide an overview on aerial manipulation of SRURSs nowadays and promote relative research in the future. In the past decade, aerial manipulation of SRURSs has attracted the interest of researchers globally. This paper provides a literature review of the last 10 years (2008–2017) on SRURSs, and details achievements and challenges. Firstly, the definition, current state, development, classification, and challenges of SRURSs are introduced. Then, related papers are organized into two topical categories: mechanical structure design, and modeling and control. Following this, research groups involved in SRURS research and their major achievements are summarized and classified in the form of tables. The research groups are introduced in detail from seven parts. Finally, trends and challenges are compiled and presented to serve as a resource for researchers interested in aerial manipulation of SRURSs. The problem, trends, and challenges are described from three aspects. Conclusions of the paper are presented, and the future of SRURSs is discussed to enable further research interests.

© 2018 Chinese Society of Aeronautics and Astronautics. Production and hosting by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

## 1. Introduction

The use of small-scale rotorcraft robotic systems (SRURSs) is increasing rapidly in both scientific<sup>1</sup> and commercial fields. We typically define small-scale as being lighter than 25 kg or smaller

than 10 m in any dimension;<sup>2</sup> rotorcraft refers primarily to helicopter and multirotor in this paper. In commercial fields, SRURSs are typically used for photography, agriculture, disaster monitoring, environmental surveillance, nuclear disaster response,<sup>3</sup> and electric power inspection. The United Business Media (UBM)<sup>4</sup> has indicated an approximate 40% increase in unmanned aerial vehicles (UAVs) during 2017–2018, similar to 2016–2017. It has been reported that approximately 587,000 UAVs were sold in 2015. In scientific fields, SRURSs are widely used for unknown environment modeling,<sup>5</sup> data acquisition,<sup>6</sup> and manipulation.<sup>7</sup> Compared to commercial SRURSs, scientific researchers interested in manipulation are more concerned with interaction with the environment. The physical interaction with the surrounding environment pre-

\* Corresponding author.

E-mail addresses: [xlding@buaa.edu.cn](mailto:xlding@buaa.edu.cn) (X. DING), [gp1993@buaa.edu.cn](mailto:gp1993@buaa.edu.cn) (P. GUO).

Peer review under responsibility of Editorial Committee of CJA.



Production and hosting by Elsevier

sents a greater challenge to researchers, the most significant problem being the coupling between aerial platforms and manipulating devices. Aerial manipulation is creatively used in construction,<sup>8</sup> drawer operation,<sup>9</sup> object transporting,<sup>10,11</sup> valve turning,<sup>12</sup> tool operation,<sup>13</sup> ultrasonic testing,<sup>14</sup> unknown environment sensing,<sup>15</sup> bulb screwing,<sup>16</sup> bridge inspection,<sup>17</sup> wall climbing,<sup>18,19</sup> aerial writing,<sup>20</sup> perching and charging, anti-UAV combatting, delivering, and object assembling.

Searching for keywords in the Web of Science Core Collection,<sup>21</sup> it is observed that research related to UAVs and aerial manipulation has increased rapidly since 2011 as indicated in Fig. 1. Performing a second search using specific keywords such as quadrotor and grasping indicates that from 2008 to September 2017, only 145 papers related to aerial manipulation were retrieved out of 8373 papers as displayed in Fig. 2. However, there have been workshops at the top conference on robotics, namely the IEEE International Conference on Robotics and Automation (ICRA), every year from 2014 to 2017.<sup>22-25</sup> It is clear that the potential of aerial manipulation is high, and it remains both a frontier and valuable research direction.

With the development of aerial robot platforms, the demand for aerial robots is no longer confined to observe the environment in a passive manner. Aerial robots offer the abilities of rapid maneuvering and dexterous manipulation under complex working conditions and dangerous environ-

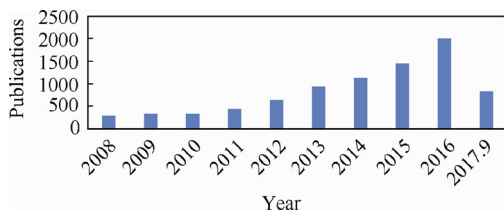


Fig. 1 Publication search results in the Web of Science Core Collection.

mental conditions. Aerial manipulation can be summarized into two problems: flying and manipulating. Further, it typically consists of two types, floating base-like multirotor and actuator-like manipulator. SRURs manipulating devices can be divided into four categories: gripper, multi-degree of freedom (DOF) rigid-body aerial manipulator, aircraft with a suspended load attached through a cable or tether, and others such as airframes or anthropomorphic fingers. Manipulation methods can be divided into four categories: grasp, interact, hang, and manipulate.

Universities and research institutions in the United States are typically sponsored by the National Aeronautics and Space Administration (NASA),<sup>26</sup> Defense Advanced Research Projects Agency (DARPA),<sup>27</sup> National Science Foundation (NSF),<sup>28</sup> Office of Naval research (ONR),<sup>29</sup> and other organizations. Universities and research institutions in Europe are commonly sponsored by projects from Horizon 2020<sup>30</sup> and the 7th Framework Programme (7FP)<sup>31</sup> such as AIRobot,<sup>32</sup> ARCAS,<sup>33</sup> SHERPA,<sup>34</sup> and Aeroworks.<sup>35</sup> Other universities and research institutions are largely sponsored by foundations in their own countries such as the National Natural Science Foundation of China (NSFC)<sup>36</sup> and the National Research Foundation of Korea (NRF).<sup>37</sup> Because of the different requirements of sponsors and different development ideas of research institutions and universities, they typically proceed in a diverse directions.

Moreover, the development of UAVs has been further encouraged by UAV competitions. The MBZIRC 2017<sup>38</sup> competition was successfully held in March 2017. Challenge 3 required a team of UAVs to collaborate to detect, locate, track, pick up, and place down a set of static and moving objects. The organizers offered five million dollars in prizes and sponsorships. The upcoming MBZIRC 2019 Challenge 1 is based on UAV dynamic aerial tracking and interventions in 3D. It will require a team of UAVs to autonomously locate, track, and interact with a set of objects moving in space.

The first challenge of SRURs when prototypes are developed is the mechanical structure design, which is both signifi-

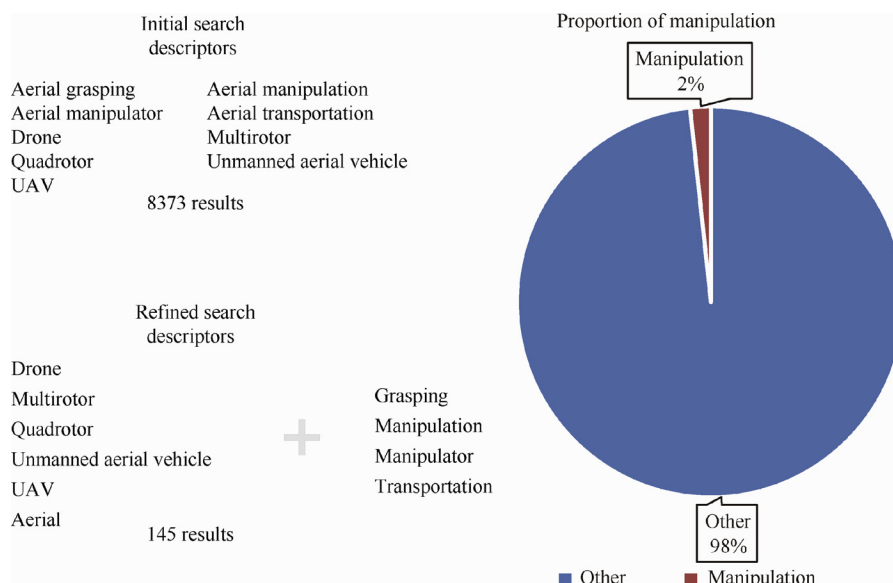


Fig. 2 Article comparison between two searches.

cant and interesting. Researchers globally have proposed many different ideas (see Section 2) including LEGO toys,<sup>39</sup> avian-inspired designs,<sup>40</sup> compliant designs,<sup>15</sup> anthropomorphic designs,<sup>41</sup> fault-tolerant designs,<sup>42</sup> Delta mechanisms,<sup>14</sup> parallel mechanisms,<sup>43</sup> redundant designs,<sup>44</sup> tool designs of collaborative work,<sup>45</sup> KUKA manipulators,<sup>46</sup> vacuum pump self-sealing suction,<sup>47</sup> and SHERPA grippers.<sup>48</sup> The primary consideration is the mechanical configuration design, because the movement of a manipulating device critically influences a UAV. A superior mechanical structure can reduce the complexity of the controller and coupling between the UAV and the manipulating device, hence improving the capability of SRURSs.

The major challenges in aerial manipulation are modeling and control. There are two approaches to address modeling and control problems. The first independent approach divides a system into two independent parts and considers the modeling methods of each part respectively. This approach considers the motion and dynamics of manipulating devices as external disturbances of UAVs; hence, it is easier to implement than an alternative. The second is an overall approach. It considers the complete system as an overall system, addressing challenges that the center of mass (COM) is changing constantly and the internal dynamics are coupled. The details of these two methods are introduced in Section 3.

To the authors' knowledge, this is the first time that a summarized review of aerial manipulation has been prepared. To provide an overview of the progress of aerial manipulation, achievements from researchers located globally are introduced in detail in Sections 2 and 3.

This paper is composed of six sections. The mechanical structure design of manipulating devices is introduced in Section 2, because the structure is the basis of control. Modeling and control methods are presented and compared in Section 3. In Section 4, works of principal universities and research institutions are presented in a tabular form. In Section 5, trends under multiple conditions and main aerial manipulation research challenges facing researchers are summarized. Finally, Section 6 provides conclusions and thoughts regarding the future of aerial manipulation.

## 2. Mechanical structure design

As mentioned above, manipulating devices can be divided into four types: gripper, manipulator, cable, and others. They are different from each other mechanically and regarding modeling and control, based on suitability for different application scenarios. The following subsections introduce these manipulating devices in detail.

### 2.1. Gripper

As displayed in Fig. 3, a single-DOF gripper is the most widely used manipulating device. It is attached directly on or under the airframe of a UAV. This kind of manipulating device has three advantages: (i) easy to build, (ii) convenient modeling and control, and (iii) relatively inexpensive.

To reduce costs, a low-cost, custom-built quadrotor was presented,<sup>39,49</sup> which used a LEGO<sup>50</sup> gripper to reduce the time of prototype development. It gripped a stuffed toy, weighing 150 g, 50 cm below the quadrotor using the gripper. Sev-




Fig. 3 Example of SRURSs with a gripper from Yale University (picture from Ref. 52).

eral grippers including impactive and ingressive grippers have been designed to grasp a number of different items including a beam and a flat piece of wood.<sup>51</sup> Impactive grippers demand that the freedom of the object to be grasped is adapted to the grippers; ingressive grippers are divided into actively engaging and passively engaging. A quadrotors team achieved a construction task using the gripper mentioned above as demonstrated.<sup>8</sup> A group of on-board vacuum suction cups was utilized to grasp a series of objects such as a battery and a hair brush,<sup>47</sup> including items on inclined surfaces. A mechanical coupling was used to reduce the complexity of the grasping mechanism on an adaptive underactuation gripper for a helicopter.<sup>42</sup> Furthermore, a gripper mounted on a helicopter and a quadrotor are compared; results indicated that the quadrotor could fulfill the condition of the gripper mounted above the airframe.<sup>52</sup> A “screwing bulb” experiment was performed by a multirotor with a gripper mounted above the airframe,<sup>16</sup> and an onboard FPGA was used to address the camera information.<sup>53,54</sup> An avian-inspired passive mechanism for a quadrotor and helicopter perching was presented;<sup>40,55</sup> the gripper consisted of three fingers imitating a songbird. Every knuckle was designed independently different from the others on the same finger so that the finger's stiffness was most suitable for perching and grasping; however, the UAV on which the gripper was mounted did not actually move. A dynamic surface grasping technique was proposed for micro-UAV landing and perching; gecko-inspired directional adhesives were used to absorb the collision energy and provide secure perching. A dynamic model that predicts attachment conditions was presented.<sup>56–58</sup> A switch between climbing and perching modes was proposed, and the task of crawling on the wall was realized. A climbing mechanism was designed to allow a robot to recover from a climbing failure.<sup>19,59</sup>

As stated above, a gripper has the following disadvantages owing to its mechanical structure: (i) limited workspace and (ii) limited grasping ability of mass and volume.


### 2.2. Manipulator

A manipulator consists mainly of two parts: one or more multi-DOF arms attached to a UAV's airframe and grippers with different kinds of sensors as illustrated in Fig. 4. Typically, arms and grippers are driven by servomotors. A manipulator significantly expands the workspace compared to a gripper, and can utilize the redundancy of the manipulator to compensate for the position error of a UAV's motion. It is a better choice for complex tasks.

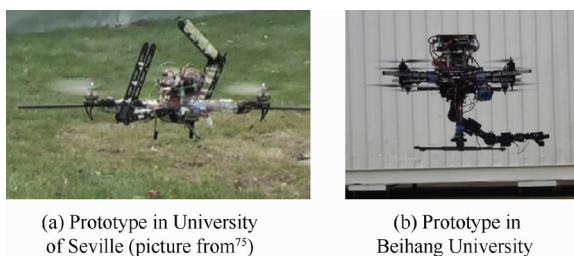

**Fig. 4** Examples of SRURSSs with a manipulator.

A typical robotic arm of a manipulator is a series-connected structure. Different-DOF arms have been developed for different applications. An avian-inspired 1-DOF arm was applied under a quadrotor to achieve bird-like grasping.<sup>60,61</sup> A simple 2-DOF arm was used to grasp a bottle in an indoor environment adopting VICON<sup>62</sup> markers,<sup>63</sup> which could manipulate an object in front of a UAV. Another 2-DOF arm was utilized for picking up and delivering an object, also under a VICON environment, in a dependent and cooperative manner.<sup>10,64,65</sup> Faced with the challenge of turning a valve for the DARPA Robotics Challenge (DRC), a dual 2-DOF arm was applied to a quadrotor;<sup>12,66</sup> the workspace of a UAV-manipulator system was beneath the UAV, and a target was located by visual servoing. With the assistance of a dual 2-DOF arm, a UAV achieved wall-climbing in a walking mode with a mechanical structure, but only in simulations.<sup>18,67,68</sup> Drawer and cylindrical objects under and in front of a multirotor were manipulated with a 3-DOF robotic arm using VICON and vision to locate a UAV and a target.<sup>9,69,70</sup> Another 3-DOF arm was used to accomplish a bridge detection task by contacting from the underside;<sup>17</sup> the arm was mounted on a UAV according to the property of the task. Aimed at improving the dexterity of a robot arm and compliance of joints, a lightweight compliant 3-DOF robotic arm was designed;<sup>15,41</sup> the mechanism of the

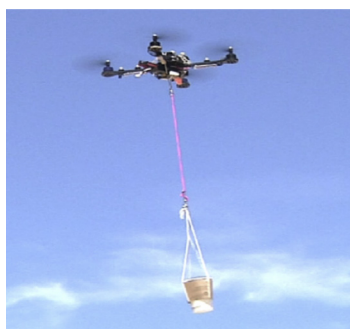

**Fig. 5** Example of SRURSSs with a cable from University of New Mexico (picture from Ref. 94).

elbow joint was based on an extension spring to realize collision detection, obstacle detection, and quality estimation of captured objects. Later, the mechanism of the elbow joint was improved by a simple transmission mechanism consisting of a pair of compression springs and a flange bearing.<sup>15</sup> A dual 3-DOF arm flying test was performed.<sup>71</sup> A novel mechanism considering the counterweight between a moving battery and a 6-DOF robotic arm was presented;<sup>72</sup> a flying and manipulating experiment was performed.<sup>73,74</sup> A 7-DOF robotic arm was installed on an octocopter to perform outdoor grasping experiments.<sup>75,76</sup> A fully actuated 7-DOF KUKA redundant industrial robotic arm was used for grasping objects utilizing its redundancy on a helicopter.<sup>46,77,78</sup> A 9-DOF hyper-redundant has been designed for aerial manipulation;<sup>44</sup> however, flying experiments have not yet been performed. Further, parallel manipulators have been applied on UAVs.<sup>43</sup>

A manipulator's disadvantages can be concluded as follows: (i) complex mechatronics system, (ii) heavy weight; (iii) difficult to control, and (iv) severe coupling interference with a UAV.

### 2.3. Cable and others

As displayed in Fig. 5, a cable or tether attached to a UAV is widely used in transporting;<sup>79–82</sup> however, only few of its mechanisms have been considered. Multi-aerial robotic manipulation experiments with cables or tethers were presented.<sup>83,84</sup> Researchers consider more the problem of how a slung-load's motion changes a system's COM and regard this as a control problem. For example, a reinforcement learning approach was adopted.<sup>85</sup> It will be introduced in detail in Section 3.

Many other manipulating devices have been presented by researchers globally. A novel mechanical design of a UAV's manipulating device was presented to interact with the environment and perform ultrasonic nondestructive experiments;<sup>14,86–88</sup> the mechanism consists of a 3-DOF Delta, a Cardan gimbal, and an end-effector. Anthropomorphic grasp was discussed to reduce the effects of gravity and inertia during a grasping process.<sup>89</sup> A novel aerial manipulation system was proposed to perform a tool operation task; the system was developed with multiple quadrotors connected to a tool through spherical joints.<sup>90</sup> A transporting express by a commercial company using a multirotor airframe was tested.<sup>91</sup> A flexible mechanism composed of active joints and passive linear joints was designed, which converts kinetic energy into potential energy; the energy is stored in a directional locking mechanism to reduce the impact of a UAV towards a wall.<sup>92,93</sup>

From the above, a cable or tether is most suitable when attention is paid to the control problem while manipulating. A gripper is easier to implement than a manipulator from the mechanical aspect. Further, a manipulator is rather

**Table 1** Comparison between different manipulating devices.

Manipulating device	Cost	Difficulty	Available range	Stability	Application trend
Gripper	Low	Low	Low	High	Decrease
Manipulator	High	High	High	Middle	Rapidly increase
Cable and tether	Low	Suitable	Middle	Middle	Slowly decrease
Other	N/A	High	High	Middle	Increase

difficult compared to other manipulating devices. Manipulating devices are compared in Table 1.

### 3. Modeling and control

In early works, because the masses of manipulating devices (mainly grippers) and targets were relatively smaller than those of UAVs, researchers ignored the changes of the COM and inertia during a manipulating period; a flying controller was applied directly on the new aerial manipulation system. This could seem as one kind of “overall approach” in this paper. However, this is a simple and inexact modeling approach. It is called a simplified approach.

The independent approach separates a UAV and manipulating devices apart, and then builds models and controllers separately. As a result, the coupling between the UAV and manipulating devices is regarded as an interference problem.

This overall approach considers the coupling problem as an internal problem; it is extremely accurate and strict. The system model should be integral from the start of kinematics and dynamics modeling.

#### 3.1. Independent approach

The independent approach utilizes the existing control algorithms of a UAV and manipulating devices, and modifies them to adapt the dynamics of a combined system. Hence, it reduces the time required for research. Moreover, the dynamics model of a system is not as complex as that of the overall approach; the interaction force is considered as external interference. This approach simplifies the modeling and control process.

A quadrotor model and a suspended load model were developed independently; a technique based on dynamic programming (DP) and an adaptive controller compensating for the change in the COM caused by load movement were proposed to ensure swing-free trajectory tracking.<sup>79,95</sup> To overcome the DP algorithm’s shortcomings of demanding accurate modeling and trajectory planning in advance, reinforcement learning algorithms such as AVI and LSPI were presented to generate trajectories with minimal residual oscillations for rotorcraft transporting suspended loads.<sup>85,96</sup>

The joint position’s motion range was determined by analyzing the stability change of a UAV originated from a manipulator’s movement.<sup>97</sup>

The model of an outer loop controller for helicopters and load was replaced by a simplified model based on interconnected mass points. For the first time, an experiment with three helicopters with suspended load transporting was performed in 2007.<sup>83,84</sup>

The redundancy of a 7-DOF manipulator was used to reduce the change of a system’s COM when the manipulator was moving. To address the coupling between the airframe and the manipulator, yaw was introduced into kinematic planning of the manipulator. A flying test by combing impedance control with visual servoing control on a helicopter with a 7-DOF KUKA manipulator was performed.<sup>46,77,78</sup>

The contact model was divided into three parts, i.e., a quadrotor, a manipulator, and an environment, which were then combined by the contact point relationship. The attitude and position of the system were tuned by an impedance con-

troller designed according to the passive characteristics of the system.<sup>86</sup> To solve the unstable problem of inner-loop dynamics caused by a former impedance controller, a modified impedance controller combines virtual quality with the external force dynamic model of a system. The mode of a manipulator was divided into a free-flight mode and a contact mode; a hybrid control method was used to switch between the two modes.<sup>87,88,98</sup> An LQR-optimized approach was proposed to replace the traditional PID control and to adapt the condition that forces acting consistently on the wall are similar to the UAV’s weight; however, the algorithm requires the contact point be static.<sup>92,93</sup>

A controller based on momentum estimation considering external forces was proposed; the gain of the estimator was chosen according to the closed-loop impedance behavior with a proper hierarchical structure.<sup>99</sup> The multilayer structure of the controller based on PID was presented.<sup>72</sup>

A variable parameter integral backstepping (VPIB) algorithm replaces PID control for compensating the motion of a manipulator. This controller guarantees asymptotic stability and has robustness to some uncertainties. Experimental results demonstrated that the VPIB controller was superior to the PID on a prototype.<sup>17,100</sup>

The Lagrange dynamics of a system were completely decoupled into two separate parts, the COM dynamics in E(3) and the internal dynamics between the quadrotor and the manipulator. Further, a backstepping-like controller was presented to track the trajectory of the end-effector.<sup>101</sup>

The trajectory linearization control (TLC) for a quadrotor and the inverse kinematics for manipulators were combined to achieve wall-climbing; the interaction between the main body and manipulators was reduced by an optimal planning strategy.<sup>18,68</sup>

#### 3.2. Overall approach

The overall approach is divided into two parts in this paper as described in the following subsections, the simplified and overall approaches. The simplified approach directly applies the traditional control algorithm of a UAV to SRURSSs, which is simple and easy to implement, but inaccurate. It is regarded as the early version of the overall approach. The overall approach considers SRURSSs as a whole, yet complex.

##### 3.2.1. Simplified approach

The estimates of the mass and offset COM of a system in the PID controller for a quadrotor with a gripper were presented.<sup>51</sup> A construction task was accomplished using the wavefront raster algorithm by the quadrotors team.<sup>8</sup> Avian-inspired perching and grasping based on vision in a GPS-denied, VICON-denied environment were achieved.<sup>102,103</sup>

The contact between a helicopter and an environment is equivalent to a 6-DOF spring, and a PID controller was used for the helicopter grasping with a gripper.<sup>104,105</sup> The stabilities of helicopter grasping and quadrotor grasping were compared. Results indicated that the quadrotor was more sensitive to changes in the COM caused by the load; however, it can be applied to situations where the load must be placed above the COM of the airframe.<sup>52,106</sup>

A low-cost, home-built quadrotor grasping with a gripper was presented. A nested PID was used to overcome precise

positioning, object sensing and manipulating, and stabilization caused by object interaction.<sup>39,49</sup>

### 3.2.2. Overall approach

For the first time, a complete dynamic model was developed for a UAV with a manipulator system. A modified Cartesian impedance control exploiting redundancy was presented to overcome the challenges of interference and aerodynamic modeling.<sup>107</sup> All the system dynamics of the coupled UAV and manipulator were considered for the first time. The low-level layer was based on the backstepping-control theory, and the top layer was a visual servoing feedback controller based on an external image.<sup>108</sup> The controller was improved to adapt multi-cooperation SRURs.<sup>109</sup> A hybrid control system combining visual servoing control with hierarchical task control was applied for aerial manipulation.<sup>110–112</sup>

A hybrid model was introduced to describe a quadrotor with cable-suspended load. Through the differentially flat theory, a nominal trajectory with different constraints was planned, so that the large-area dynamic motion of the quadrotor under the condition of swing load was possible. Then, tracking of the quadrotor's attitude, the load's attitude, and the position in the three-dimensional space was realized by geometric control.<sup>81,113</sup>

A lifting load process was divided into three parts, i.e., setup, pull, and raise, using the related theory of hybrid systems and utilizing a discrete state to determine the key waypoint that must be passed through.<sup>95,114,115</sup> A smooth trajectory was generated using the minimum snap theory,<sup>116</sup> and an adaptive controller was designed by combining geometric control with the least-squares estimation theory.

A system is regarded as a hybrid system that is divided into four phases including flight, arm deployment, adaption, and manipulation phases, and different adaptive algorithms are applied to the different phases to ensure stability. A valve-turning task was achieved by visual servoing control and gain scheduling. A Lyapunov-based model reference adaptive control (MRAC) method was introduced to address the changes of the COM and inertia, as well as the external disturbance during the manipulation.<sup>66,117</sup> The coupling between environment and SRURs was divided into three categories including momentary coupling, loose coupling, and strong coupling.<sup>118</sup>

Addressing the requirement that different tasks require different impedance values, a controller structure that can change the impedance and adjust the contact force was proposed. Further, a free-flight controller was proposed to reduce the dependencies on position restrictions and lightweight manipulators.<sup>119,120</sup>

A rigid multi-body system was modeled on the Lie group, and optical trajectory control for aerial manipulation was proposed.<sup>63,121,122</sup>

A modified VPIB algorithm considers full dynamic effects and variation of the mass distribution when a manipulator moves and adopts impedance control. The DGPS and cam-

eras were used to replace VICON. Further, the closed-loop inverse kinematics (CLIK) was used on a SRURs manipulator.<sup>75,76</sup>

A behavioral controller based on null space-based behavioral (NSB) was utilized to integrate the motion between a manipulator and a quadrotor.<sup>73</sup> Another three-layer structure controller was proposed, and a manipulator was controlled by an impedance controller.<sup>74</sup>

A system model from free-flight to contacting on the wall was proposed, and a hybrid-MPC controller to control UAV docking and sliding on the wall was presented. Online data processing for state estimation and manipulating was addressed.<sup>123,124</sup> An aerial writing task was performed based on the hybrid-MPC controller proposed above.<sup>125,126</sup>

An adaptive sliding controller based on a traditional Lagrange modeling method was proposed.<sup>10</sup> An augmented adaptive sliding controller based on a closed-chain robot dynamics was presented for cooperative transportation of multiple SRURs.<sup>64</sup> Online estimation of objects based on an augmented adaptive sliding controller was proposed.<sup>65</sup> An image-based visual servo (IBVS) for SRURs was presented to fulfill an indoor manipulation task.<sup>69,70</sup> Parametric dynamic movement primitives (PDMPs) and rapidly exploring randomized trees star (RRT\*) were combined to address the multi-SRURs cooperation problem in an obstacle environment.<sup>127</sup> An disturbance-observer-derived external force estimation was proposed to estimate the swing angle of a multirotor-suspended load.<sup>82</sup>

A visual servo control was presented for a multirotor; this processes data online with an onboard FPGA.<sup>16,53,54</sup>

A cable was modeled as an arbitrary number of different links using spherical joints, and a geometric nonlinear controller was used to control the position of the quadrotor with a suspended cable load. Then the model and control methods were applied to arbitrary numbers of quadrotors to achieve manipulation with cables.<sup>128,129</sup>

A coordinate-free dynamics model of a system was used to design a geometric controller to track the position and attitude of a cable-suspended load. An elastic spring model including stiffness and damping was developed to compare with the non-elastic model. Virtually global exponential tracking was achieved.<sup>130,131</sup>

A hybrid model of a system was established by dividing the flight-walking locomotion into three modes including flight mode, double-leg support phase, and single-leg support phase. A globally valid and continuous controller was designed directly on the Lie group for quadrotor manipulating with suspended load.<sup>67,80,132,133</sup>

In conclusion, the independent approach is not sufficiently accurate; however, it outperforms the simplified approach. The overall approach is most accurate, however, also most difficult. Increasingly more researchers are abandoning the simplified approach because its low accuracy can cause instability of SRURs. The approaches are compared in Table 2.

**Table 2** Comparison of different modeling and control methods.

Modeling and control method	Difficulty	Accuracy	Feasibility	Trend
Simplified approach	Low	Low	High	Rapidly decrease
Independent approach	Suitable	Suitable	High	Slowly increase
Overall approach	High	High	Suitable	Rapidly increase

**Table 3** Research groups involved in research of SRURSSs.

Name of group and institution	Manipulated type	Aerial manipulation platform	Data processing	Implementation approach	Modeling approach	Control method
University of Pennsylvania GRASP Lab <sup>8,51,60,61,81,102,103,113,116,134–138</sup>	Multi gripper cooperation, slung-load, 1-DOF arm	AscTech	Offline	Indoor flight experiment, outdoor flight experiment	Overall modeling	PID, visual servoing
Department of Mechanical Engineering, University of Utah <sup>40,55</sup>	Gripper	Gauai 330X QuadFlyer	Not involved	Indoor experiment	Not involved	Not involved
Department of Electrical Engineering, University of California <sup>39,49</sup>	Gripper	Home-built quadrotor	Offline	Indoor flight experiment	Overall modeling	Nested PID
MARHES Lab, University of New Mexico <sup>79,85,95,96,114,115,139</sup>	Slung-load	AscTec Hummingbird	Offline	Indoor flight experiment	Independent modeling	Geometric adaptive
Department of Mechanical Engineering and Materials Science, Yale University <sup>42,52,104–106</sup>	Gripper	T-Rex600 helicopter	Offline	Outdoor flight experiment	Overall modeling	PID
Drexel Autonomous Systems Lab, Drexel University <sup>43,44,66,97,140</sup>	2-DOF dual-arm, 4-DOF dual-arm	3DRobotics	Offline	Indoor flight experiment	Independent modeling, overall modeling	Adaptive PID, visual servoing
Department of Mechanical Engineering, Johns Hopkins University <sup>63,121,122</sup>	2-DOF arm	3DRobotics	Offline	Indoor flight experiment	Overall modeling	Feedback linearization + PID
RAMS Laboratory, University of Maryland <sup>47</sup>	Multi gripper	AscTech	Offline	Indoor flight experiment	Overall modeling	PID
Biomimetics & Dexterous Manipulation Laboratory, Stanford University <sup>19,56–59</sup>	Multi gripper	AscTech	Not involved	Indoor flight experiment, outdoor flight experiment	Not involved	Not involved
Mechanical and Aerospace Engineering, The George Washington University <sup>128,129,141</sup>	Slung-load	Custom-built quadrotor	Offline	Indoor flight experiment	Overall modeling	Geometric Control
Mechanical Engineering, Carnegie Mellon University <sup>130,131</sup>	Slung-load	Not involved	Not involved	Simulation	Overall modeling	Geometric Control
Real-Time Systems and Robotics, Technical University of Berlin <sup>83,84</sup>	Slung-load, multi-cooperation	Custom-built quadrotor named TUB-H	Online	Outdoor flight experiment	Independent modeling	Model-based control
DLR - German Aerospace Center <sup>46,77,78</sup>	7-DOF arm	SWISS UAV	Online	Outdoor flight experiment	Independent modeling	PID/Impedance control, visual servoing
Laboratory for Robotics and Intelligent Control Systems University of Zagreb <sup>112,117,118</sup>	2-DOF dual-arm	3DRobotics	Offline	Indoor flight experiment	Overall modeling	Gain scheduling + MRAC, visual servoing
CTIT Institute, Robotics and Mechatronics group, University of Twente <sup>14,86–88,92,93,98,119,120,142</sup>	Interaction with manipulator	AsTec Pelican	Offline	Indoor flight experiment	Independent modeling, overall modeling	Impedance control + PID
Autonomous Systems Lab, Swiss Federal Institute of Technology Zurich <sup>20,123–126,143–145</sup>	Interaction with airframe	Custom-built quadrotor named ACX, UPAT-TTR, ASLquad	Offline, online	Indoor flight experiment	Overall modeling	Hybrid MPC
PRISMA Lab, University of Naples Federico II <sup>72,89,99,107–112,146,147</sup>	3-DOF arm, 6-DOF arm	AsTec Pelican	Offline	Simulation, indoor flight experiment	Independent modeling, overall modeling	Cartesian impedance, integral backstepping + image-based visual-servo
Robotics, Vision and Control Group, University of Seville <sup>15,17,41,71,75,100</sup>	3-DOF arm, 7-DOF arm	Custom-built QARM1, ASUME, AMIS	Offline	Indoor experiment, outdoor flight experiment	Independent modeling, overall modeling	Variable Parameter Integral Backstepping



**Table 3** (continued)

Name of group and institution	Manipulated type	Aerial manipulation platform	Data processing	Implementation approach	Modeling approach	Control method
University of Cassino and Southern Lazio <sup>73,74</sup>	6-DOF arm	AsTec Pelican	Offline	Indoor flight experiment	Overall modeling	Behavioral control, hierarchical control
Intelligent Control Systems Lab, Seoul National University <sup>6,9,10,64,65,69,127,148</sup>	2-DOF arm, 3-DOF arm, Slung-load, Multi-cooperation	Smart Xcopter, DJI F550, Ascending Technologies, Firefly	Online	Indoor flight experiment	Overall modeling	Visual servoing, adaptive sliding mode control
Interactive & Networked Robotics Lab, Seoul National University <sup>13,45,90,101,149,150</sup>	Multi cooperation	AscTec Hummingbirds	Offline	Indoor flight experiment	Independent modeling	Backstepping-like control
Department of Robotics, Ritsumeikan University <sup>16,53,54</sup>	Gripper	DJI F550	Online	Indoor flight experiment	Overall modeling	Visual servoing
Space Robot Laboratory, Beihang University <sup>18,67,68,80,132,133,151–154</sup>	2-DOF dual-arm	Custom-built quadrotor named MMAR	Offline	Simulation, outdoor flight experiment	Independent modeling, overall modeling	TLC + computed-torque method

#### 4. Research groups involved in SRURSS' research and major achievements

Numerous research groups have displayed interest in the field of aerial manipulation. Table 3 presents many of the research groups involved in the research and development of aerial manipulation of SRURSSs. The majority of these have been introduced in Sections 2 and 3. The list is not exhaustive and excludes military and industrial research groups.

The achievements of these universities and research institutions are listed in Table 4.

From this table, we can observe that research institutions and universities in America are more interested in grippers and cables or tethers, which is a result of their simplicity in implementation, convenient modeling and control, and low cost. Conversely, research institutions and universities in Europe are more interested in manipulators because of the demands of Horizon 2020 and 7FP. The attentions of other research institutions and universities do not express systematic characteristics.

#### 5. Trends and challenges

With the development of aerial manipulation, many types of problems appear when experiments and simulations are performed. To solve these problems, researchers globally present new, exciting ideas. With the ongoing development of research, numerous trends have been formed in many fashions. However, there remain many challenges on how to achieve aerial manipulation. Some of these have been addressed whereas others remain open. These are presented in Fig. 6.

Before undertaking any new research, it is important to build a ground test platform for UAV flying and manipulating. A grasp multiple micro-UAV (MUAV) testbed was introduced, and aerial manipulation was studied on MUAVs with grippers utilizing the testbed.<sup>135</sup> A 6-DOF miniature gantry crane imitating the flight of a UAV with two manipulators was presented.<sup>97</sup> A low-cost, simplified quadrotor test bench

for 6-DOF flight was proposed. These test platforms can reduce a research period significantly.<sup>151</sup>

For manipulating devices and DOF choices, researchers are increasingly drawn to two extreme cases. One is the simplest case of a gripper, especially for an MUAV, which faces the challenge of limited manipulating space. The other is a manipulator for the accuracy of manipulation. The challenges they must address are complex modeling and control of SRURSSs, and severe interference from a manipulator to a UAV. Both of these cases meet the challenge of how to realize fault-tolerant grasping under the error condition of an end-effector.


The development of hardware and visual algorithms has been rapid in recent years. Aerial manipulation has a strong and special requirement for the hardware of perception as follows. (1) Aerial manipulation with SRURSSs demands higher accuracy than a normal UAV. Not only must the UAV be stable, but also the manipulating device and the UAV must be extremely accurate. (2) Aerial manipulation with SRURSSs demands lighter payload. This is because the total load capacity of an SRURSS is limited, and manipulating devices and payload further reduce the restricted payload. (3) Aerial manipulation with SRURSSs demands better sensors. It is important to realize onboard perception and processing; however, the hardware and visual algorithms are limited mainly because of the weight of the hardware and the processing speed. It remains a challenge to achieve complete real-time and accurate perception and processing with onboard sensors. A VICON camera has a strong dependence on the environment, which limits the sizes of SRURSSs; it also limits the application scene to indoor locations. VICON is slowly being replaced by visual cameras and DGPS. As processors advance, on-board FPGA and PC104 will facilitate processing data from offline to online. Omitting the data transmission segment such as WIFI and XBEE<sup>155</sup> increases the real-time performance of a UAV. This means that aerial manipulation is moving a step further toward industrial applications and intelligence. There remain three challenges to be resolved for the perception, localization, and data processing problem, which are fusion and filtering of multiple sensors, onboard

**Table 4** Major achievements of research groups.

Name of group and institution	Major achievements
University of Pennsylvania GRASP Lab	Constructed with quadrotor teams Developed avian-inspired perching and grasping based on vision in GPS-denied, VICON-denied environment
Department of Mechanical Engineering, University of Utah	Developed an avian-inspired passive mechanism for quadrotor perching where the perching remains stable under minor disturbances on a variety of surfaces
Department of Electrical Engineering, University of California	Presented an implementation of autonomous indoor aerial gripping using a low-cost, custom-built quadrotor. Overcame major challenges: precise positioning, sensing, and manipulation of an object, and realized stabilization in the presence of a disturbance due to interaction with an object.
MARHES Lab, University of New Mexico	Proposed a technique based on dynamic programming that ensures swing-free trajectory tracking Relied on reinforcement learning algorithms such as AVI and LSPI to generate trajectories with minimal residual oscillations for rotorcraft transporting suspended loads Designed an adaptive controller combining geometric control and the least square estimation theory, and completed an experiment of lifting objects
Department of Mechanical Engineering and Materials Science, Yale University	Solved the deviations and step disturbances generated due to payload variations and offsets under PID control Allowed a UAV to grasp unknown loads within a given mass range
Drexel Autonomous Systems Lab, Drexel University	Constructed a miniature 6-DOF gantry system to provide mobility and emulate a UAV in flight Proposed a framework for valve turning using an aerial vehicle endowed with dual multi-DOF manipulators under a visual servoing condition
Department of Mechanical Engineering, Johns Hopkins University	Modeled a rigid multi-body system on the Lie group and proposed an optical trajectory controller for aerial manipulation Completed indoor grasp in a NaturalPoint OptiTrack Motion Capture System environment
RAMS Laboratory, University of Maryland	Presented a vacuum pump sucker used as a gripper where a number of suction cups are used to address a variety of problems and different planes of grasping.
Biomimetics & Dexterous Manipulation Laboratory, Stanford University	Proposed a dynamic surface grasping technique for micro-UAV landing and perching, and presented a dynamic model that predicts attachment conditions Designed a climbing mechanism. Presented a switch between climbing and perching modes, and realized the task of crawling on a wall. Furthermore, the robot could recover from a climbing failure
Mechanical and Aerospace Engineering, The George Washington University	Modeled a cable as an arbitrary number of different links by spherical joints Presented a geometric nonlinear controller to control the position of a quadrotor
Mechanical Engineering, Carnegie Mellon University	Simulated an arbitrary number of quadrotors to achieve manipulating with cables modeled above Established a coordinate-free dynamics model of a system by establishing equations of motion directly on the unit sphere and the special orthogonal group. Solved the cooperative transportation problem of multiple quadrotors with a cable Developed an elastic spring model including stiffness and damping. Proved that geometric control is applicable to both elastic and non-elastic cables utilizing the singular perturbation theory
Real-Time Systems and Robotics, Technical University of Berlin	Performed the first test flights of three helicopters with suspended load
DLR – German Aerospace Center	Developed a robot with a large helicopter with a real robotic arm
Laboratory for Robotics and Intelligent Control Systems, University of Zagreb	Introduced gain scheduling and a Lyapunov-based model reference adaptive control method to address the changes of the COM, inertia, and the external disturbance during manipulation of a robot Divided the coupling between environment and SRURSs into three categories including momentary coupling, loose coupling, and strong coupling
CTIT Institute, Robotics and Mechatronics group, University of Twente	Designed a 3-DOF Delta robotic manipulator together with a nondestructive testing end-effector, and performed ultrasonic nondestructive testing experiments Proposed a modified impedance control strategy, where a controller uses a virtual mass coupled to a robotic system, which allows for stable interaction Presented a versatile control architecture characterized by its capability of varying the apparent impedance of a controlled aerial robot and an interaction force.
Autonomous Systems Lab, Swiss Federal Institute of Technology Zurich	Proposed a real-time simulation suite for coaxial rotor UAVs with interacting environment tasks Presented a hybrid-MPC controller to control UAV docking and sliding on walls
PRISMA Lab, University of Naples Federico II	Addressed online data processing for state estimation and manipulating Presented a Cartesian impedance control for UAVs equipped with a robotic arm, and exploited the redundancy of the system to perform useful subtasks Demonstrated, for the first time, the simultaneous control of a quadrotor and a manipulator it transports considering the internal cross-dynamics. Proposed a new solution for the fast synthesis of anthropomorphic grasps.
Robotics, Vision and Control Group, University of Seville	Designed a light and flexible manipulator for detecting an unknown environment Designed a controller that weakens the attitude vibration of four rotors, and improved the control accuracy of the end of the manipulator Completed an outdoor flight experiment of a 7-DOF manipulator operation on a UAV

**Table 4** (continued)

Name of group and institution	Major achievements
University of Cassino and Southern Lazio	Proposed a behavioral control based on the NSB paradigm to address the coordination between the arm and vehicle motions Proposed a controller including three levels, i.e., the outer loop is a trajectory generator and an impedance filter, the middle loop is an inverse kinematic algorithm, and the inner loop is motion tracking
Intelligent Control Systems Lab, Seoul National University	Realized object capture, transportation, and placement under Vicon environment Realized unknown object grasping and transporting through visual capture and online quality estimation Presented a motion planning approach based on PDMPs for coordinating multiple aerial robots and their manipulators quickly in an environment cluttered with obstacles.
Interactive & Networked Robotics Lab, Seoul National University	Proposed a method where the Lagrange dynamics of quadrotor-manipulator systems can be completely decoupled Proposed a hierarchical control framework for multiple cooperative quadrotor-manipulator systems that allows them to endow a common grasped object with a user-specified desired behavior
Department of Robotics, Ritsumeikan University Space Robot Laboratory, Beihang University	Described an FPGA-based on-board vision-based control system for autonomous orientation of an aerial robot to assist aerial manipulation tasks such as unscrewing a light bulb Presented a quadrotor test bench that can test and verify a 6-DOF flight controller Designed an MMAR capable of flight and wall climbing based on a TLC controller Addressed the problem of flying-walking locomotion with an MMAR, and employed a hybrid-modeling framework to model the dynamics of the overall flying-walking locomotion maneuver. Investigated the trajectory linearization control for the kinematics on S2 and SO(3). The control is globally valid and continuous because it is designed directly on the Lie group

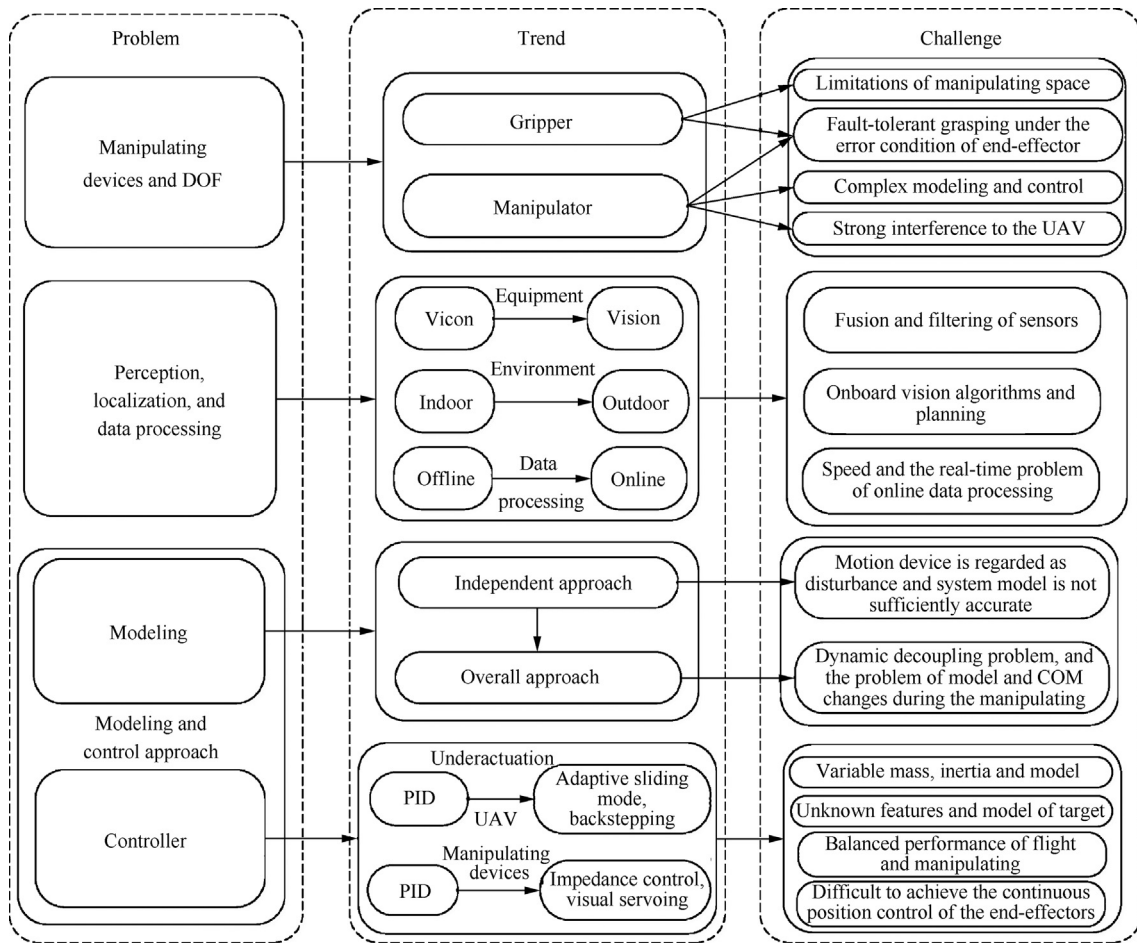

**Fig. 6** Problems, trends, and challenges.

vision algorithms and planning, and calculation speed together with the real-time problem of online data processing.

Modeling and control approaches have been introduced in detail in Section 3. Increasingly researchers are adopting the overall approach for high accuracy. The independent approach faces the challenge that the system model is not sufficiently precise. Although the overall approach should solve the dynamic decoupling problem, model and COM changes during manipulating continue. Meanwhile, controllers for UAVs and manipulating devices have been developed from early-time PID to the present situation. Now adaptive sliding mode control and backstepping control are used for UAVs, while impedance control and visual servoing control are used for manipulating devices. A controller should address the following challenges: (i) variable mass, inertia, and model, (ii) unknown features and model of a target, (iii) balanced performance of flight and manipulation, attempting to achieve agile flight with a heavy payload at the same time as providing accurate and stable manipulation, and (iv) continuous position control of the end-effector is difficult to achieve because an underactuated multirotor cannot control the position and attitude simultaneously.

## 6. Conclusions and future

This paper presented a literature review of small-scale rotorcraft unmanned aerial robotic systems. The research state was introduced. Works on aerial manipulation of SRURs were presented in three fashions. Mechanical structure design included three parts: i) grippers, ii) manipulators, and iii) cables and others. Modeling and control approaches were divided into two parts, independent and overall approaches including the simplified approach. Relative research groups and major achievements were presented in figures and tables for easy access. Problems, trends, and challenges were concluded and presented.

The overall approach is the trend of modeling approach, and increasingly more and more researchers are addressing SRURs with manipulators. It can be forecasted that researchers will continue research on SRURs with manipulators using the overall modeling approach in the future.

In fact, significant work remains to be undertaken in the future. This includes aerial manipulation of moving objects, anti-UAV combatting by aerial manipulation, and air-ground mobile cooperative manipulation. Furthermore, only a small number of industrial and commercial applications have been presented. There remains a significant amount of future research into aerial manipulation of small-scale rotorcraft unmanned aerial robotic systems.

## Acknowledgment

This work was supported by the National Natural Science Foundation of China (Nos. 91748201 and 51505014).

## References

- Kumar V, Michael N. Opportunities and challenges with autonomous micro aerial vehicles. *Int J Rob Res* 2012;31(11):1279–91.
- Cai GW, Dias J, Seneviratne L. A survey of small-scale unmanned aerial vehicles: recent advances and future development trends. *Unmanned Syst* 2014;2(2):175–99.
- Nagatani K, Kiribayashi S, Okada Y, Otake K, Yoshida K, Tadokoro S, et al. Emergency response to the nuclear accident at the Fukushima Daiichi nuclear power plants using mobile rescue robots. *J Field Rob* 2013;30(1):44–63.
- UBM [Internet]. Available from: <http://www.ubm.com/>.
- Kendoul F. Survey of advances in guidance, navigation, and control of unmanned rotorcraft systems. *J Field Rob* 2012;29(2):315–78.
- Lee H, Kim HJ. Trajectory tracking control of multirotors from modelling to experiments: a survey. *Int J Control Autom Syst* 2017;15(1):281–92.
- Brock O, Katz D, Srinivasa S. Mobile manipulation [from the guest editors]. *IEEE Rob Autom Mag* 2012;19(2):18–9.
- Lindsey Q, Mellinger D, Kumar V. Construction with quadrotor teams. *Auton Robots* 2012;33(3):323–36.
- Kim S, Seo H, Kim HJ. Operating an unknown drawer using an aerial manipulator. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA; Piscataway, NJ: IEEE Press; 2015. p. 5503–8.
- Kim S, Choi S, Kim HJ. Aerial manipulation using a quadrotor with a two dof robotic arm. *2013 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2013 Nov 3–7; Tokyo, Japan Piscataway, NJ: IEEE Press; 2013. p. 4990–5.
- Sayyaadi H, Soltani A. Modeling and control for cooperative transport of a slung fluid container using quadrotors. *Chin J Aeronaut* 2017;31(2):262–72.
- Orsag M, Korpela C, Bogdan S, Oh P. Valve turning using a dual-arm aerial manipulator. *2014 international conference on unmanned aircraft systems (ICUAS)*; 2013 May 28–31; Atlanta, Georgia, USA; Piscataway, NJ: IEEE Press; 2014. p. 836–41.
- Lee D, Ha C. Mechanics and control of quadrotors for tool operation. *2012 ASME dynamic systems and control conference*; 2012 Oct 17–19; Fort Lauderdale, USA; 2012.
- Keemink AQ, Fumagalli M, Stramigioli S, Carloni R. Mechanical design of a manipulation system for unmanned aerial vehicles. *2012 IEEE international conference on robotics and automation (ICRA)*; 2012 May 14–18; St. Paul, MN, USA; Piscataway, NJ: IEEE Press; 2012. p. 3147–52.
- Suarez A, Heredia G, Ollero A. Lightweight compliant arm with compliant finger for aerial manipulation and inspection. *2016 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2016 Oct 9–14; Daejeon, Korea; Piscataway, NJ: IEEE Press; 2016. p. 4449–54.
- Shimahara S, Suphachart L, Ladig R, Shimonomura K. Aerial torsional manipulation employing multi-rotor flying robot. *2016 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2016 Oct 9–14; Daejeon, Korea; Piscataway, NJ: IEEE Press; 2016. p. 1595–600.
- Jimenez-Cano A, Braga J, Heredia G, Ollero A. Aerial manipulator for structure inspection by contact from the underside. *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2015 Sept 28–Oct 2; Hamburg, Germany; Piscataway, NJ: IEEE Press; 2015. p. 1879–4.
- Ding XL, Yu YS, Zhu JJ. Trajectory linearization tracking control for dynamics of a multi-propeller and multifunction aerial robot-mmar. *2011 IEEE international conference on robotics and automation (ICRA)*; 2011 May 9–13; Shanghai, China; Piscataway, NJ: IEEE Press; 2011. p. 757–62.
- Pope MT, Kimes CW, Jiang H, Hawkes EW, Estrada MA, Kerst CF, et al. A multimodal robot for perching and climbing on vertical outdoor surfaces. *IEEE Trans Rob* 2017;33(1):38–48.
- Alexis K, Papachristos C, Siegwart R, Tzes A. Robust model predictive flight control of unmanned rotorcrafts. *J Intell Rob Syst* 2016;81(3–4):443.

21. Web of Science [Internet]. Available from: [www.isiknowledge.com/](http://www.isiknowledge.com/).
22. AG&M 2014 – autonomous grasping and manipulation: An open challenge – icra workshop [Internet]. Available from: <http://grasping-challenge.org/>.
23. ICRA 2015 workshop: Aerial robotics manipulation and load transportation [Internet]. Available from: [http://arcas-project.eu/sites/default/files/Web\\_ICRA2015/index.html](http://arcas-project.eu/sites/default/files/Web_ICRA2015/index.html).
24. Workshops – ICRA 2016 in stockholm [Internet]. Available from: <http://www.aerial-manipulation-workshop.com/>.
25. ICRA 2017 workshop [Internet]. Available from: <http://www.aerial-monitoring-maintenance-workshop.com/>.
26. NASA [Internet]. Available from: <https://www.nasa.gov/>.
27. Defense advanced research projects agency [Internet]. Available from: <https://www.darpa.mil/>.
28. NSF - national science foundation [Internet]. Available from: <https://www.nsf.gov/>.
29. Office of naval research [Internet]. Available from: <https://www.onr.navy.mil/>.
30. European commission [Internet]. Available from: <http://ec.europa.eu/programmes/horizon2020/>.
31. FP7 – research – europa [Internet]. Available from: [https://ec.europa.eu/research/fp7/index\\_en.cfm](https://ec.europa.eu/research/fp7/index_en.cfm).
32. Airobots [Internet]. Available from: <http://airobots.dei.unibo.it/>.
33. Arcas project [Internet]. Available from: <http://www.arcas-project.eu/>.
34. Sherpa [Internet]. Available from: <http://www.sherpa-project.eu./sherpa/>.
35. Aeroworks [Internet]. Available from: <http://www.aeroworks2020.eu/>.
36. National natural science foundation of china [internet]. Available from: <http://www.nsf.gov.cn/>.
37. National research foundation of korea [internet]. Available from: <http://www.nrf.re.kr/eng/main>.
38. Mbzirc [Internet]. Available from: <http://www.mbzirc.com/>.
39. Ghadiok V, Goldin J, Ren W. On the design and development of attitude stabilization, vision-based navigation, and aerial gripping for a low-cost quadrotor. *Auton Robots* 2012;33(1–2):41–68.
40. Doyle CE, Bird JJ, Isom TA, Kallman JC, Bareiss DF, Dunlop DJ, et al. An avian-inspired passive mechanism for quadrotor perching. *IEEE/ASME Trans Mechatron* 2013;18(2):506–17.
41. Suarez A, Heredia G, Ollero A. Lightweight compliant arm for aerial manipulation. *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2015 Sept 28-Oct 2; Hamburg, Germany; Piscataway, NJ: IEEE Press; 2015. p. 1627–32.
42. Pounds PE, Dollar AM. *Aerial grasping from a helicopter uav platform. Experimental robotics*. Springer; 2014. p. 269–83.
43. Danko TW, Chaney KP, Oh PY. A parallel manipulator for mobile manipulating uavs. *2015 IEEE international conference on technologies for practical robot applications (TePRA)*; 2015 May 11–12; Woburn, Massachusetts, USA; Piscataway, NJ: IEEE Press; 2015. p. 1–6.
44. Danko TW, Oh PY. A hyper-redundant manipulator for mobile manipulating unmanned aerial vehicles. *2013 international conference on unmanned aircraft systems (ICUAS)*; 2013 May 28–31; Atlanta, Georgia, USA; Piscataway, NJ: IEEE Press; 2013. p. 974–81.
45. Yang H, Lee D. Hierarchical cooperative control framework of multiple quadrotor-manipulator systems. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA Piscataway, NJ: IEEE Press; 2015. p. 4656–62.
46. Huber F, Kondak K, Krieger K, Sommer D, Schwarzbach M, Laiacker M, et al. First analysis and experiments in aerial manipulation using fully actuated redundant robot arm. *2013 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2013 Nov 3–7; Tokyo, Japan; Piscataway, NJ: IEEE Press; 2013. p. 3452–7.
47. Kessens CC, Thomas J, Desai JP, Kumar V. Versatile aerial grasping using self-sealing suction. *2016 IEEE international conference on robotics and automation (ICRA)*; 2016 May 16–21; Stockholm, Sweden; Piscataway, NJ: IEEE Press; 2016. p. 3249–54.
48. Barrett E, Reiling M, Fumagalli M, Carloni R. The sherpa gripper: Grasping of small-scale uavs. *2016 IEEE international symposium on safety, security, and rescue robotics (SSRR)*; 2016 Oct 23–27; Lausanne, Switzerland; Piscataway, NJ: IEEE Press; 2016. p. 384–9.
49. Ghadiok V, Goldin J, Ren W. Autonomous indoor aerial gripping using a quadrotor. *2011 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2011 Sept 25–30; San Francisco, California, USA; Piscataway, NJ: IEEE Press; 2011. p. 4645–51.
50. Lego [internet]. Available from: <https://www.lego.com/zh-cn/>.
51. Mellinger D, Lindsey Q, Shomin M, Kumar V. Design, modeling, estimation and control for aerial grasping and manipulation. *2011 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2011 Sept 25–30; San Francisco, California, USA; Piscataway, NJ: IEEE Press; 2011. p. 2668–73.
52. Pounds PE, Bersak DR, Dollar AM. Stability of small-scale uav helicopters and quadrotors with added payload mass under pid control. *Auton Robots* 2012;33(1–2):129–42.
53. Shimahara S, Ladig R, Suphachart L, Hirai S, Shimonomura K. Aerial manipulation for the workspace above the airframe. *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2015 Sept 28-Oct 2; Hamburg, Germany; Piscataway, NJ: IEEE Press; 2015. p. 1453–8.
54. Suphachart L, Shimahara S, Ladig R, Shimonomura K. Vision based autonomous orientational control for aerial manipulation via on-board fpga. *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*; 2016 June 26-July 1; Las Vegas, Nevada, USA; Piscataway, NJ: IEEE Press; 2016. p. 36–42.
55. Doyle CE, Bird JJ, Isom TA, Johnson CJ, Kallman JC, Simpson JA, et al. Avian-inspired passive perching mechanism for robotic rotorcraft. *2011 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2011 Sept 25–30; San Francisco, California, USA; Piscataway, NJ: IEEE Press; 2011. p. 4975–80.
56. Hawkes EW, Christensen DL, Eason EV, Estrada MA, Heverly M, Hilgemann E, et al. Dynamic surface grasping with directional adhesion. *2013 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2013 Nov 3–7; Tokyo, Japan; Piscataway, NJ: IEEE Press; 2013. p. 5487–93.
57. Jiang H, Pope MT, Hawkes EW, Christensen DL, Estrada MA, Parlier A, et al. Modeling the dynamics of perching with opposed-grip mechanisms. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31-June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 3102–8.
58. Jiang H, Pope MT, Estrada MA, Edwards B, Cuson M, Hawkes EW, et al. Perching failure detection and recovery with onboard sensing. *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2015 Sept 28-Oct 2; Hamburg, Germany; Piscataway, NJ: IEEE Press; 2015. p. 1264–70.
59. Estrada MA, Hawkes EW, Christensen DL, Cutkosky MR. Perching and vertical climbing: Design of a multimodal robot. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 Sept 14–18; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 4215–21.
60. Thomas J, Polin J, Sreenath K, Kumar V. Avian-inspired grasping for quadrotor micro uavs. *ASME international design engineering technical conference (IDETC)*; 2013 Aug 4–7; Portland, OR, USA; 2013.
61. Thomas J, Loianno G, Polin J, Sreenath K, Kumar V. Toward autonomous avian-inspired grasping for micro aerial vehicles. *Bioinspiration Biomimetics* 2014;9(2):025010.
62. Vicon [internet]. Available from: <https://www.vicon.com/>.

63. Garimella G, Kobilarov M. Towards model-predictive control for aerial pick-and-place. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA Piscataway, NJ: IEEE Press; 2015. p. 4692–7.
64. Lee H, Kim H, Kim HJ. Path planning and control of multiple aerial manipulators for a cooperative transportation. *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2015 Sept 28–Oct 2; Hamburg, Germany; Piscataway, NJ: IEEE Press; 2015. p. 2386–91.
65. Lee H, Kim HJ. Estimation, control, and planning for autonomous aerial transportation. *IEEE Trans Ind Electron* 2017;**64**(4):3369–79.
66. Korpela C, Orsag M, Oh P. Towards valve turning using a dual-arm aerial manipulator. *2014 IEEE/RSJ international conference on intelligent robots and systems (IROS 2014)*; 2014 Sept 14–18; Chicago, Illinois, USA; Piscataway, NJ: IEEE Press; 2014. p. 3411–6.
67. Ding XL, Yu YS. Motion planning and stabilization control of a multipropeller multifunction aerial robot. *IEEE/ASME Trans Mechatron* 2013;**18**(2):645–56.
68. Ding X, Yu Y. Dynamic analysis, optimal planning and composite control for aerial arm-operating with a multi-propeller multifunction aerial robot. *2012 international conference on mechatronics and automation (ICMA)*; 2012 Aug 5–8; Chengdu, China; Piscataway, NJ: IEEE Press; 2012. p. 420–7.
69. Kim S, Seo H, Choi S, Kim HJ. Vision-guided aerial manipulation using a multirotor with a robotic arm. *IEEE/ASME Trans Mechatron* 2016;**21**(4):1912–23.
70. Seo H, Kim S, Kim HJ. Aerial grasping of cylindrical object using visual servoing based on stochastic model predictive control. *2017 IEEE international conference on robotics and automation (ICRA)*; 2017 May 29–June 3; Singapore; Piscataway, NJ: IEEE Press; 2017. p. 6362–8.
71. Suarez A, Jimenez-Cano A, Vega V, Heredia G, Rodríguez-Castaño A, Ollero A. Lightweight and human-size dual arm aerial manipulator. *2017 international conference on unmanned aircraft systems (ICUAS)*; 2017 June 13–16; Miami, Florida, USA; Piscataway, NJ: IEEE Press; 2017. p. 1778–84.
72. Ruggiero F, Trujillo MA, Cano R, Ascorbe H, Viguria A, Pérez C, et al. A multilayer control for multirotor uavs equipped with a servo robot arm. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA Piscataway, NJ: IEEE Press; 2015. p. 4014–20.
73. Baizid K, Giglio G, Pierri F, Trujillo MA, Antonelli G, Caccavale F, et al. Experiments on behavioral coordinated control of an unmanned aerial vehicle manipulator system. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA Piscataway, NJ: IEEE Press; 2015. p. 4680–5.
74. Cataldi E, Muscio G, Trujillo MA, Rodríguez Y, Pierri F, Antonelli G, et al. Impedance control of an aerial-manipulator: preliminary results. *2016 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2016 Oct 9–14; Daejeon, Korea; Piscataway, NJ: IEEE Press; 2016. p. 3848–53.
75. Heredia G, Jimenez-Cano A, Sanchez I, Llorente D, Vega V, Braga J, et al. Control of a multirotor outdoor aerial manipulator. *2014 IEEE/RSJ international conference on intelligent robots and systems (IROS 2014)*; 2014 Sept 14–18; Chicago, Illinois, USA; Piscataway, NJ: IEEE Press; 2014. p. 3417–22.
76. Sánchez M, Acosta J, Ollero A. Integral action in first-order closed-loop inverse kinematics. Application to aerial manipulators. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA IEEE; 2015. p. 5297–302.
77. Kondak K, Huber F, Schwarzbach M, Laiacker M, Sommer D, Bejar M, et al. Aerial manipulation robot composed of an autonomous helicopter and a 7 degrees of freedom industrial manipulator. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31–June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 2107–12.
78. Laiacker M, Huber F, Kondak K. High accuracy visual servoing for aerial manipulation using a 7 degrees of freedom industrial manipulator. *2016 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2016 Oct 9–14; Daejeon, Korea; Piscataway, NJ: IEEE Press; 2016. p. 1631–6.
79. Palunko I, Fierro R, Cruz P. Trajectory generation for swing-free maneuvers of a quadrotor with suspended payload: A dynamic programming approach. *2012 IEEE international conference on robotics and automation (ICRA)*; 2012 May 14–18; St. Paul, MN, USA; Piscataway, NJ: IEEE Press; 2012. p. 2691–7.
80. Yu YS, Ding XL. Trajectory linearization control on lie groups with applications to aerial manipulation. *J Franklin Inst* (accept).
81. Sreenath K, Lee T, Kumar V. Geometric control and differential flatness of a quadrotor uav with a cable-suspended load. *2013 IEEE 52nd annual conference on decision and control (CDC)*; 2013 Dec 10–13; Florence, Italy; Piscataway, NJ: IEEE Press; 2013. p. 2269–74.
82. Lee SJ, Kim HJ. Autonomous swing-angle estimation for stable slung-load flight of multi-rotor uavs. *2017 IEEE international conference on robotics and automation (ICRA)*; 2017 May 29–June 3; Singapore; Piscataway, NJ: IEEE Press; 2017. p. 4576–81.
83. Bernard M, Kondak K, Maza I, Ollero A. Autonomous transportation and deployment with aerial robots for search and rescue missions. *J Field Rob* 2011;**28**(6):914–31.
84. Bernard M, Kondak K. Generic slung load transportation system using small size helicopters. *2009 ICRA'09 IEEE international conference on robotics and automation*; 2009 May 12–17; Kobe, Japan; Piscataway, NJ: IEEE Press; 2009. p. 3258–64.
85. Palunko I, Faust A, Cruz P, Tapia L, Fierro R. A reinforcement learning approach towards autonomous suspended load manipulation using aerial robots. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 4896–901.
86. Fumagalli M, Naldi R, Macchelli A, Carloni R, Stramigioli S, Marconi L. Modeling and control of a flying robot for contact inspection. *2012 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2012 Oct 7–12; Vilamoura, Algarve, Portugal; Piscataway, NJ: IEEE Press; 2012. p. 3532–7.
87. Scholten JL, Fumagalli M, Stramigioli S, Carloni R. Interaction control of an uav endowed with a manipulator. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 4910–5.
88. Fumagalli M, Naldi R, Macchelli A, Forte F, Keemink AQ, Stramigioli S, et al. Developing an aerial manipulator prototype: physical interaction with the environment. *IEEE Rob Autom Mag* 2014;**21**(3):41–50.
89. Lippiello V. Grasp the possibilities: anthropomorphic grasp synthesis based on the object dynamic properties. *IEEE Rob Autom Mag* 2015;**22**(4):69–79.
90. Nguyen H-N, Park S, Lee D. Aerial tool operation system using quadrotors as rotating thrust generators. *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2015 Sept 28–Oct 2; Hamburg, Germany; Piscataway, NJ: IEEE Press; 2015. p. 1285–91.
91. Amazon prime air. [internet]. Available from: <https://www.amazon.com/b?node=8037720011>.
92. Bartelds T, Capra A, Hamaza S, Stramigioli S, Fumagalli M. Compliant aerial manipulators: toward a new generation of aerial robotic workers. *IEEE Rob Autom Lett* 2016;**1**(1):477–83.
93. Wopereis H, Hoekstra J, Post T, Folkertsma G, Stramigioli S, Fumagalli M. Application of substantial and sustained force to vertical surfaces using a quadrotor. *2017 IEEE international conference on robotics and automation (ICRA)*; 2017 May 29–June 3; Singapore; Piscataway, NJ: IEEE Press; 2017. p. 2704–9.

94. Faust A, Palunko I, Cruz P, Fierro R, Tapia L. Automated aerial suspended cargo delivery through reinforcement learning. *Artif Intell* 2017;**247**:381–98.
95. Palunko I, Cruz P, Fierro R. Agile load transportation: safe and efficient load manipulation with aerial robots. *IEEE Rob Autom Mag* 2012;**19**(3):69–79.
96. Faust A, Palunko I, Cruz P, Fierro R, Tapia L. Learning swing-free trajectories for uavs with a suspended load. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 4902–9.
97. Korpela CM, Danko TW, Oh PY. Mm-uav: mobile manipulating unmanned aerial vehicle. *J Intell Rob Syst* 2012;**65**(1):93–101.
98. Fumagalli M, Carloni R. A modified impedance control for physical interaction of uavs. *2013 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2013 Nov 3–7; Tokyo, Japan; Piscataway, NJ: IEEE Press; 2013. p. 1979–84.
99. Ruggiero F, Cacace J, Sadeghian H, Lippiello V. Impedance control of vtol uavs with a momentum-based external generalized forces estimator. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31–June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 2093–9.
100. Jimenez-Cano A, Martin J, Heredia G, Ollero A, Cano R. Control of an aerial robot with multi-link arm for assembly tasks. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 4916–21.
101. Yang H, Lee D. Dynamics and control of quadrotor with robotic manipulator. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31–June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 5544–9.
102. Thomas J, Loiano G, Sreenath K, Kumar V. Toward image based visual servoing for aerial grasping and perching. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31–June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 2113–8.
103. Thomas J, Loiano G, Daniilidis K, Kumar V. Visual servoing of quadrotors for perching by hanging from cylindrical objects. *IEEE Rob Autom Lett* 2016;**1**(1):57–64.
104. Pounds PE, Bersak DR, Dollar AM. Grasping from the air: Hovering capture and load stability. *2011 IEEE international conference on robotics and automation (ICRA)*; 2011 May 9–13; Shanghai, China; Piscataway, NJ: IEEE Press; 2011. p. 2491–8.
105. Pounds PE, Dollar AM. Uav rotorcraft in compliant contact: Stability analysis and simulation. *2011 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2011 Sept 25–30; San Francisco, California, USA; Piscataway, NJ: IEEE Press; 2011. p. 2660–7.
106. Pounds PE, Dollar AM. Stability of helicopters in compliant contact under pd-pid control. *IEEE Trans Rob* 2014;**30**(6):1472–86.
107. Lippiello V, Ruggiero F. Exploiting redundancy in cartesian impedance control of uavs equipped with a robotic arm. *2012 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2012 Oct 7–12; Vilamoura, Algarve, Portugal; Piscataway, NJ: IEEE Press; 2012. p. 3768–73.
108. Mebarki R, Lippiello V, Siciliano B. Image-based control for dynamically cross-coupled aerial manipulation. *2014 IEEE/RSJ international conference on intelligent robots and systems (IROS 2014)*; 2014 Sept 14–18; Chicago, Illinois, USA; Piscataway, NJ: IEEE Press; 2014. p. 4827–33.
109. Mebarki R, Lippiello V, Siciliano B. Toward image-based visual servoing for cooperative aerial manipulation. *2015 IEEE international conference on robotics and automation (ICRA)*; 2015 May 26–30; Seattle, USA Piscataway, NJ: IEEE Press; 2015. p. 6074–80.
110. Buonocore LR, Cacace J, Lippiello V. Hybrid visual servoing for aerial grasping with hierarchical task-priority control. *2015 23th mediterranean conference on control and automation (MED)*; 2015 June 16–19; Torremolinos, Spain; Piscataway, NJ: IEEE Press; 2015. p. 617–23.
111. Lippiello V, Cacace J, Santamaria-Navarro A, Andrade-Cetto J, Trujillo MA, Esteves YR, et al. Hybrid visual servoing with hierarchical task composition for aerial manipulation. *IEEE Rob Autom Lett* 2016;**1**(1):259–66.
112. Santamaria-Navarro A, Lippiello V, Andrade-Cetto J. Task priority control for aerial manipulation. *2014 IEEE international symposium on safety, security, and rescue robotics (SSRR)*; 2014 Oct 27–30; Hokkaido, Japan; Piscataway, NJ: IEEE Press; 2014. p. 1–6.
113. Sreenath K, Michael N, Kumar V. Trajectory generation and control of a quadrotor with a cable-suspended load—a differentially-flat hybrid system. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 4888–95.
114. Cruz PJ, Fierro R. Cable-suspended load lifting by a quadrotor uav: Hybrid model, trajectory generation, and control. *Auton Robots* 2017;**41**(6):1–15.
115. Cruz P, Fierro R. Autonomous lift of a cable-suspended load by an unmanned aerial robot. *2014 IEEE conference on control applications (CCA)*; 2014 Oct 8–10; Antibes, France; Piscataway, NJ: IEEE Press; 2014. p. 802–7.
116. Mellinger D, Kumar V. Minimum snap trajectory generation and control for quadrotors. *2011 IEEE international conference on robotics and automation (ICRA)*; 2011 May 9–13; Shanghai, China Piscataway, NJ: IEEE Press; 2011. p. 2520–5.
117. Orsag M, Korpela CM, Bogdan S, Oh PY. Hybrid adaptive control for aerial manipulation. *J Intell Rob Syst* 2014;**73**(1–4):693.
118. Orsag M, Korpela C, Bogdan S, Oh P. Dexterous aerial robots—mobile manipulation using unmanned aerial systems. *IEEE Trans Rob* 2017;**33**(6):1453–66.
119. Mersha AY, Stramigioli S, Carloni R. Exploiting the dynamics of a robotic manipulator for control of uavs. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31–June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 1741–6.
120. Mersha AY, Stramigioli S, Carloni R. Variable impedance control for aerial interaction. *2014 IEEE/RSJ international conference on intelligent robots and systems (IROS 2014)*; 2014 Sept 14–18; Chicago, Illinois, USA; Piscataway, NJ: IEEE Press; 2014. p. 3435–40.
121. Kobilarov M. Discrete optimal control on lie groups and applications to robotic vehicles. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31–June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 5523–9.
122. Kobilarov M. Nonlinear trajectory control of multi-body aerial manipulators. *J Intell Rob Syst* 2014;**73**(1–4):679.
123. Alexis K, Huerzeler C, Siegwart R. Hybrid modeling and control of a coaxial unmanned rotorcraft interacting with its environment through contact. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 5417–24.
124. Alexis K, Huerzeler C, Siegwart R. Hybrid predictive control of a coaxial aerial robot for physical interaction through contact. *Control Eng Pract* 2014;**32**:96–112.
125. Darivianakis G, Alexis K, Burri M, Siegwart R. Hybrid predictive control for aerial robotic physical interaction towards inspection operations. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 Sep 14–18; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 53–8.
126. Alexis K, Darivianakis G, Burri M, Siegwart R. Aerial robotic contact-based inspection: planning and control. *Auton Robots* 2016;**40**(4):631–55.

127. Kim H, Lee H, Choi S, Noh Y-k, Kim HJ. Motion planning with movement primitives for cooperative aerial transportation in obstacle environment. *2017 IEEE international conference on robotics and automation (ICRA)*; 2017 May 29-June 3; Singapore; Piscataway, NJ: IEEE Press; 2017. p. 2328–34.
128. Goodarzi FA, Lee D, Lee T. Geometric control of a quadrotor uav transporting a payload connected via flexible cable. *Int J Control Autom Syst* 2015;**13**(6):1486–98.
129. Goodarzi FA, Lee T. Dynamics and control of quadrotor uavs transporting a rigid body connected via flexible cables. *2015 american control conference (ACC)*; 2015 July 1–3; Chicago, Illinois, USA; Piscataway, NJ: IEEE Press; 2015. p. 4677–82.
130. Wu GF, Sreenath K. Geometric control of multiple quadrotors transporting a rigid-body load. *2014 IEEE 53rd annual conference on decision and control (CDC)*; 2014 Dec 15–17; Los Angeles, CA, USA; Piscataway, NJ: IEEE Press; 2014. p. 6141–8.
131. Kotaru P, Wu G, Sreenath K. Dynamics and control of a quadrotor with a payload suspended through an elastic cable. *2017 american control conference (ACC)*; 2017 May 24–26; Seattle, WA, USA; Piscataway, NJ: IEEE Press; 2017. p. 3906–13.
132. Yu YS, Ding XL. On hybrid modeling and control of a multi-propeller multifunction aerial robot with flying-walking locomotion. *Auton Robots* 2015;**38**(3):225–42.
133. Yu YS, Ding XL, Zhu JJ. Dynamic modeling and control for aerial arm-operating of a multi-propeller multifunction aerial robot. *Adv Rob* 2017;**31**(5):1–15.
134. Thomas J, Loiano G, Pope M, Hawkes EW, Estrada MA, Jiang H, et al. Planning and control of aggressive maneuvers for perching on inclined and vertical surfaces. *ASME 2015 international design engineering technical conferences and computers and information in engineering conference*; 2015 Aug 2–5; Boston, MA, USA; 2015.
135. Michael N, Mellinger D, Lindsey Q, Kumar V. The grasp multiple micro-uav testbed. *IEEE Rob Autom Mag* 2010;**17**(3):56–65.
136. Jiang QM, Kumar V. Determination and stability analysis of equilibrium configurations of objects suspended from multiple aerial robots. *J Mech Rob* 2012;**4**(2):021005.
137. Jiang QM, Kumar V. The inverse kinematics of cooperative transport with multiple aerial robots. *IEEE Trans Rob* 2013;**29**(1):136–45.
138. Mulgaonkar Y, Araki B, Koh J-s, Guerrero-Bonilla L, Aukes DM, Makineni A, et al. The flying monkey: a mesoscale robot that can run, fly, and grasp. *2016 IEEE international conference on robotics and automation (ICRA)*; 2016 May 16–21; Stockholm, Sweden; Piscataway, NJ: IEEE Press; 2016. p. 4672–9.
139. Cruz PJ, Oishi M, Fierro R. Lift of a cable-suspended load by a quadrotor: a hybrid system approach. *2015 american control conference (ACC)*; 2015 July 1–3; Chicago, Illinois, USA; Piscataway, NJ: IEEE Press; 2015. p. 1887–92.
140. Korpela C, Orsag M, Pekala M, Oh P. Dynamic stability of a mobile manipulating unmanned aerial vehicle. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 4922–7.
141. Lee T. Geometric control of multiple quadrotor uavs transporting a cable-suspended rigid body. *2014 IEEE 53rd annual conference on decision and control (CDC)*; 2014 Dec 15–17; Los Angeles, CA, USA; Piscataway, NJ: IEEE Press; 2014. p. 6155–60.
142. Fumagalli M, Stramigioli S, Carloni R. Mechatronic design of a robotic manipulator for unmanned aerial vehicles. *2016 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2016 Oct 9–14; Daejeon, Korea; Piscataway, NJ: IEEE Press; 2016. p. 4843–8.
143. Huerzeler C, Alexis K, Siegwart R. Configurable real-time simulation suite for coaxial rotor uavs. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 309–16.
144. Papachristos C, Alexis K, Tzes A. Efficient force exertion for aerial robotic manipulation: exploiting the thrust-vectoring authority of a tri-tiltrotor uav. *2014 IEEE international conference on robotics and automation (ICRA)*; 2014 May 31-June 7; Hong Kong, China; Piscataway, NJ: IEEE Press; 2014. p. 4500–5.
145. Papachristos C, Alexis K, Tzes A. Model predictive hovering-translation control of an unmanned tri-tiltrotor. *2013 IEEE international conference on robotics and automation (ICRA)*; 2013 May 6–10; Karlsruhe, Germany; Piscataway, NJ: IEEE Press; 2013. p. 5425–32.
146. Bellicoso CD, Buonocore LR, Lippiello V, Siciliano B. Design, modeling and control of a 5-DoF light-weight robot arm for aerial manipulation. *2015 23th mediterranean conference on control and automation (MED)*; 2015 June 16–19; Torremolinos, Spain; Piscataway, NJ: IEEE Press; 2015. p. 853–8.
147. Lippiello V, Ruggiero F. Cartesian impedance control of a uav with a robotic arm. *IFAC Proc Vol* 2012;**45**(22):704–9.
148. Lee H, Kim S, Kim HJ. Control of an aerial manipulator using on-line parameter estimator for an unknown payload. *2015 IEEE international conference on automation science and engineering (CASE)*; 2015 Aug 24–28; Gothenburg, Sweden; Piscataway, NJ: IEEE Press; 2015. p. 316–21.
149. Nguyen H-N, Lee D. Hybrid force/motion control and internal dynamics of quadrotors for tool operation. *2013 IEEE/RSJ international conference on intelligent robots and systems (IROS)*; 2013 Nov 3–7; Tokyo, Japan; Piscataway, NJ: IEEE Press; 2013. p. 3458–64.
150. Nguyen H-N, Ha C, Lee D. Mechanics, control and internal dynamics of quadrotor tool operation. *Automatica* 2015;**61**:289–301.
151. Yu YS, Ding XL. A quadrotor test bench for six degree of freedom flight. *J Intell Rob Syst* 2012;**68**(3–4):323–38.
152. Yu YS, Ding XL. Safe landing analysis of a quadrotor aircraft with two legs. *J Intell Rob Syst* 2014;**76**(3–4):527.
153. Yu YS, Ding XL. A global tracking controller for underactuated aerial vehicles: design, analysis, and experimental tests on quadrotor. *IEEE/ASME Trans Mechatron* 2016;**21**(5):2499–511.
154. Yu YS, Ding XL, Zhu JJ. Attitude tracking control of a quadrotor uav in the exponential coordinates. *J Franklin Inst* 2013;**350**(8):2044–68.
155. Digi Xbee [internet]. Available from: <https://www.digi.com/xbee>.