



Innovative prestressing method for externally bonded CFRP laminates without mechanical anchorage

Downloaded from: <https://research.chalmers.se>, 2021-11-29 12:47 UTC

Citation for the original published paper (version of record):

Yang, J., Haghani Dogaheh, R., al-Emrani, M. (2019)

Innovative prestressing method for externally bonded CFRP laminates without mechanical anchorage
Engineering Structures, 197

<http://dx.doi.org/10.1016/j.engstruct.2019.109416>

N.B. When citing this work, cite the original published paper.

1 **Innovative prestressing method for externally bonded CFRP laminates without**
2 **mechanical anchorage**

3 Jincheng Yang, Reza Haghani, Mohammad Al-Emrani

4 Lightweight structures, Division of structural engineering, Chalmers University of Technology

5 Corresponding author: reza.haghani@chalmers.se

6

7 Published in *Engineering Structures*, Volume 197, 15 October 2019

8 <https://doi.org/10.1016/j.engstruct.2019.109416>

9

10 **Abstract**

11 Strengthening of reinforced concrete (RC) structures by externally bonded carbon fiber
12 reinforced polymer (CFRP) laminates has been widely accepted as an effective and cost-
13 efficient method. It is well known that advantages offered by the bonded CFRP laminates can
14 be further increased by prestressing the laminates prior to bonding. Mechanical anchors are
15 essential, in this case, to prevent debonding since interfacial stress at areas close to the ends of
16 the strengthening laminate is several times higher than the strength of the concrete substrate.
17 Common anchorage solutions often consist of bolted metallic plates to clamp the prestressed
18 CFRP laminate. Besides labor-intensive installation operation, the anchor plates are vulnerable
19 to galvanic corrosion, which further complicates the inspection and increases the maintenance
20 costs. There are also doubts about the long-term performance of such anchorage systems as it
21 highly depends on the quality of the adhesive layer between the plate and laminate, and the
22 level of pre-tension in clamping bolts.

23 This paper presents the work conducted at Chalmers University of Technology on the
24 development of an innovative prestressing method and a tool which allow for the application
25 of prestressed CFRP laminates without mechanical anchors. The principles of the novel method
26 and the prestressing system are explained. Experimental and numerical work carried out on an
27 RC beam strengthened with this method is presented. Results indicate that CFRP laminates
28 with high prestressing forces (approximately 30% of CFRP tensile strength) can be safely
29 anchored without the need for mechanical anchors. Numerical results based on finite element
30 analyses show that the proposed prestressing method can reduce the interfacial shear stresses
31 in the CFRP-concrete adhesive joint below the bond strength with reasonable safety margin.

32

33 **Keywords**

34 Carbon fiber reinforced polymer (CFRP); Prestressing; Externally bonded; Reinforced
35 concrete (RC); Strengthening; Anchorage; Debonding; Experiment; Finite element

36

37

38

39

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46

1 Introduction

Since the mid-1980s, fiber-reinforced polymer (FRP) composites have been used for external strengthening of concrete [1], steel [2,3] and timber structures [4] and a great deal of research work has been devoted to different aspects of this technology in the past four decades [5–7]. Currently, FRP bonding has been widely accepted as an effective and cost-efficient upgrading technique in structural engineering. The technique offers several advantages such as easy and quick application, good durability and better strengthening effect compared to traditional methods. Flexural strengthening is the most common application in which FRP sheets or laminates are bonded to tensile parts of the structure and perform as “externally bonded reinforcement (EBR)” in interaction with internal steel reinforcement. To obtain the maximum strengthening effect, it is common to use carbon FRP (CFRP) laminates as they provide higher elastic modulus and better durability and fatigue characteristics compared to other types of FRP materials.

A major limitation when using externally bonded CFRP laminates for flexural strengthening is the premature separation of the laminate from the structural member, known as “debonding”. Stress concentration due to shear lag effect at the ends of the bonded laminate, or intermediate bending and shear cracks, often causes the debonding. Debonding is an unfavorable failure mode as it often takes place before the ultimate strength of the bonded laminate is reached. Studies show that, in most applications, only about 20-30% of the CFRP laminate capacity can be utilized [1]. Studies show that introducing prestressing to CFRP laminates prior to bonding can improve the effect of strengthening and, at the same time, enhance the utilization of the CFRP laminate. Research in this area started in the early 1990s covering theoretical and experimental work [8–11]. As summarized in the review Aslam et al. [12], using prestressed CFRP laminates, instead of passive (non-prestressed) ones, can result in: (1) enhancing utilization of the strengthening laminate; (2) improving the fatigue strength of the strengthened structure; (3) enhancing the flexural capacity; and (4) improving the behavior of the strengthened member in serviceability limit state, such as delaying the initiation of cracks, increasing bending stiffness, and reducing crack width. There are mainly three alternatives to apply prestressed CFRP laminates as EBR: (1) introducing the prestress by cambering the structural member before bonding, (2) prestressing against an independent element, and (3) prestressing against the element to be retrofitted. The latter is the most practical to apply prestressing force. Prestressed CFRP reinforcement enables an active strengthening scheme meaning that it can cope with existing dead loads, in addition to extra imposed loads to be applied to the structure.

A problem associated with the application of bonded prestressed CFRP laminates is the rather high interfacial stresses built up in the bond line at areas close to the ends of the laminate. The high interfacial stresses (i.e. shear and peeling) are attributed to the so-called “shear lag effect”, where the induced prestressing force in the laminate tends to transfer to the strengthened member over a short distance at the terminus of the laminate, which is referred to as “anchorage length” [13]. The sudden force transfer over this short length gives rise to interfacial stresses which are several times higher than the strength of concrete substrate and trigger the debonding failure [14]. Analyses show that rather low levels of prestressing force (ca. 5% of the laminate ultimate strength) would create high enough interfacial shear stresses causing debonding. On

1 the other hand, such low levels of prestressing would not be enough to make significant
2 changes in the behavior of the strengthened structure compared to passive strengthening.

3 Anchorage of CFRP laminates is, therefore, an essential part of conventional prestressed EBR
4 systems. Triantafillou et al. [14] studied the effects of prestressed CFRP sheets on RC beams
5 and highlighted the need for anchorage at the CFRP ends to prevent the premature debonding.
6 Mechanical anchors are the most common type for this purpose and often consist of metallic
7 plates. The metallic anchor plate is the earliest form of anchorage devices studied by
8 researchers and is considered to be the most effective when used for flexural strengthening [15].

9 However, mechanical anchors in general and metallic anchors in particular have several
10 shortcomings, including (1) labor-intensive installation process involved with cutting and
11 drilling concrete for installing metallic plates and bolts; (2) vulnerability of steel anchors to the
12 corrosion during the service life; (3) restrictions in inspection due to lack of access and (4)
13 aesthetic issues involved with using mechanical anchors. To cope with the corrosion problem,
14 researchers have studied non-metallic anchors as alternatives, see for example [16,17].
15 Although the non-metallic alternatives can prevent some of the inherent shortcomings of the
16 metallic anchors, they cannot deliver comparative anchorage capacity as metallic ones [15].
17 More information on existing anchorage solutions for EBR can be found in reviews by Grelle
18 and Sneed [18] and Kalfat et al. [15].


19 In order to overcome the problems related to mechanical anchors, Stöcklin and Meier [19]
20 proposed a gradient anchorage method, whose idea was to eliminate the need for mechanical
21 anchors. The concept was based on the relationship between the gradient of axial force in the
22 prestressed CFRP laminate and the magnitude of the interfacial shear along the adhesive bond
23 line [20]. Using this method, it would be possible to control the interfacial stress by
24 manipulating the axial force profile in the prestressed laminate. Obviously, to self-anchor the
25 laminate without the aid of mechanical anchors, the interfacial shear stress should be reduced
26 well below the shear strength of the concrete, as it is the weakest link in the joint. It is feasible
27 to achieve this by gradually reducing the axial force in the prestressed laminate towards its
28 ends. The decreasing gradient of the axial force is decided by the strength of the concrete
29 substrate and design considerations. In practice, the gradient anchorage method was realized
30 by releasing the prestressing force, in a number of steps, over a predefined length close to the
31 ends of the laminate with the help of a computer-controlled system [21,22]. Meanwhile, a
32 heating device was used to fast cure the epoxy in each step and prepare for the force release in
33 the next step. Although this method succeeded to eliminate the mechanical end anchors, the
34 procedure of applying the prestressing force into the laminate has to be conducted in multiple
35 steps of force releasing and epoxy curing, which increases the operational complexity and time.

36 This paper presents an innovative method for the application of self-anchored prestressed
37 CFRP laminates and demonstrates a prestressing tool developed for this purpose. The proposed
38 method uses the same principle as the gradient anchorage method but focuses on simplifying
39 the operation and shortening the application time without the involvement of complicated
40 instruments. The research on the development of this method started in 2009 at Chalmers
41 University of Technology in collaboration with Swedish Transport Administration [23]. To
42 demonstrate the applicability of the method, this paper presents an experimental verification
43 on an RC beam strengthened with this method. The prestressed CFRP laminate in the test was
44 equipped with multiple strain gauges to monitor the strain magnitude and distribution during
45 the prestressing and 6 days afterward. The prestressing loss and the laminate anchorage are
46 discussed for the bonded CFRP laminate prestressed up to 30% of its ultimate strength. A finite
47 element model was developed to further study the force transfer mechanism in the prestressing
48 system and investigate the interfacial stresses in the CFRP-concrete adhesive joint.

2 Stepwise prestressing method

2.1 Principle

The principle of the stepwise prestressing method is based on manipulating the profile of the axial force along the prestressed CFRP laminate, in order to control the interface stresses that occur along the CFRP-concrete bond line after removing the prestressing system. This prestressing method is able to reduce the interfacial stresses (in shear and peeling) well below the strength of concrete substrates so that the prestressed laminate can be safely anchored relying on the strength of the CFRP-concrete bonded joint.

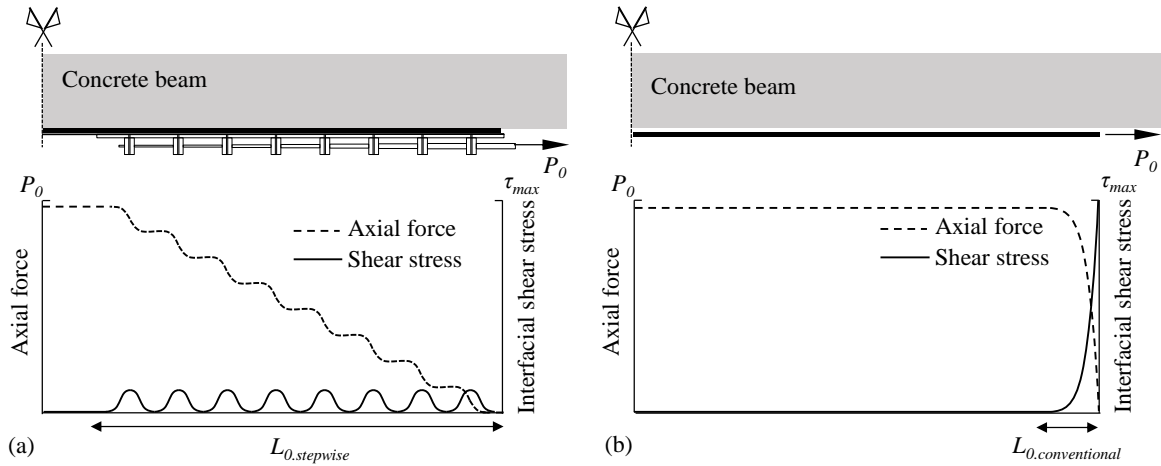

9

10 Figure 1. The fundamental difference between (a) stepwise prestressing method and (b) conventional prestressing method with
 11 regard to the axial force profile in the bonded CFRP laminate and the shear stress occurring in the adhesive layer; $L_{0,stepwise}$ and
 12 $L_{0,conventional}$ denote the anchorage lengths of bonded CFRP laminates using the corresponding application method.

13 Figure 1 illustrates the fundamental difference between the conventional and the stepwise
 14 prestressing methods with regard to the axial force profile in the prestressed CFRP laminate
 15 and the consequent interfacial stress distribution in the bond line after releasing the prestressing
 16 force P_0 . Unlike the conventional method where the laminate is pulled at two ends to create a
 17 constant axial force, the stepwise prestressing introduces a non-uniform axial force profile
 18 which is gradually built up towards the midspan of the laminate over a predefined length,
 19 referred to as “anchorage length”. In this manner, the anchorage length can be designed and
 20 chosen to be “long enough” to reduce the interfacial shear stress in the CFRP-concrete adhesive
 21 joint to a desired level.


22 The magnitude of interfacial stress along the anchorage length is simply proportional to the
 23 gradient of the axial force in the laminate. Figure 2 illustrates the force equilibrium over a finite
 24 length of the bond between CFRP and concrete. The interfacial shear stress in Figure 2 can be
 25 expressed by Eq. 1 as:

$$\tau = \frac{\Delta P}{b \cdot \Delta x} \quad \text{Eq. 1}$$

26


27 where b is the width of the CFRP laminate and P is the axial force at an arbitrary point of the
 28 prestressed laminate. Eq.1 shows that the magnitude of shear stress has a linear relationship
 29 with the gradient of the axial force in the laminate. It is worth mentioning that the interfacial
 30 peeling stress, i.e. normal stress perpendicular to the bond line, is a function of interfacial shear
 31 stress and thus influenced by the axial force gradient in the CFRP laminate as well [24].

32

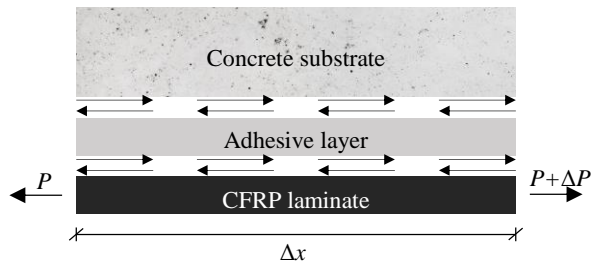

1
2 Figure 2. Force equilibrium over a finite length Δx at an arbitrary point of the CFRP-concrete bonded joint

3 In order to control the interfacial stresses along the bond line, the gradient of the axial force in
4 the CFRP laminate has to be reduced. In the stepwise prestressing method, this is achieved by
5 dividing the total prestressing force P_0 into “ n ” portions. Each portion is applied to a discrete
6 point on the CFRP laminate along the anchorage length. Therefore, the axial force in the
7 laminate would be built up in an accumulative manner as illustrated in Figure 3. The gradient
8 of prestressing force and thus the magnitude of interfacial stresses can be controlled by
9 selecting a suitable number of steps and the distance of the intervals. Theoretically, the
10 anchorage length can be extended to the half-length of the CFRP laminate. However, from a
11 practical point of view, it is preferred to minimize it to obtain a longer section of the CFRP
12 with full prestressing force.

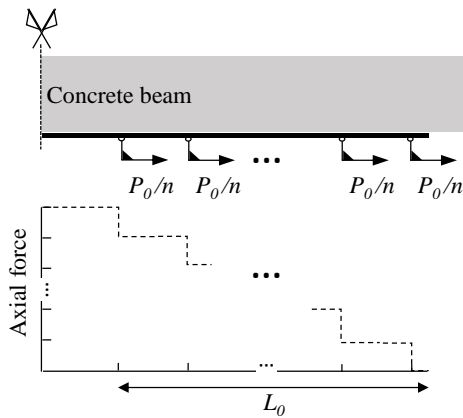


13
14 Figure 3. The concept of the stepwise prestressing method where the total prestressing force P_0 is divided into “ n ” portions
15 applied at discrete points along a CFRP laminate over the anchorage length L_0

16
17 **2.2 The prestressing system**

18 During developing the prestressing system for the stepwise method, two prerequisites were kept
19 in mind: (1) avoiding complicated or computer-controlled parts to minimize the risk of faults
20 during operation, and (2) easy handling of the device and quick application. For this reason, a
21 fully mechanical device, so called “prestressing tool”, was developed. The concept of this tool
22 is illustrated in Figure 4. It consists of a series of nodes (made of aluminum tabs) interconnected
23 with springs (made of steel bars) of different stiffness constants. When the total prestressing
24 force P_0 is applied to the first node (i.e. closest to the hydraulic jack), the mechanism of the
25 tool allows for equal distribution of the force among the tabs and thus to the CFRP laminate.
26 The axial stiffness of springs was designed so that each tab delivers an evenly portioned force
27 of $\Delta P = P_0/n$ to the CFRP laminate. The main challenge, however, was how to connect the
28 tabs to the CFRP laminate in practice. For this purpose, a plate made of glass fiber reinforced
29 polymer (GFRP) was used as a connection medium. It was first bonded to the CFRP laminate
30 and then fasten to the prestressing tool using embedded nuts in the GFRP connection plate. The
31 GFRP connection plate not only facilitates the node-to-laminate connection but also helps to

1 avoid stress concentration when the point load transmits from the tab to the CFRP laminate,
 2 see Figure 4.

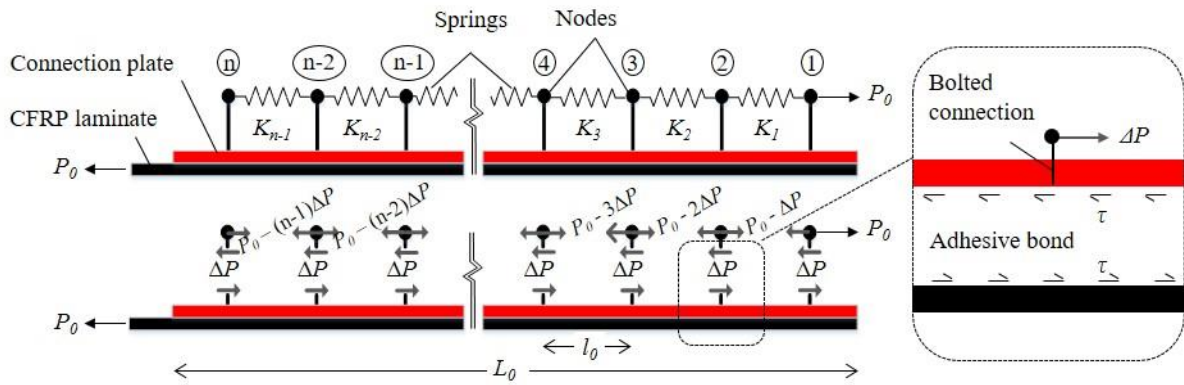

3
 4 Figure 4. The concept of the prestressing tool illustrated using spring analogy

5 The prestressing tool is made with aluminum tabs as the nodes and high-strength steel bars as
 6 the springs, see Figure 5. The cross-sections of the steel bars are designed with varying
 7 diameters in order to provide the required axial stiffnesses. The connection plate made of GFRP
 8 is 10 mm thick with the same width as the CFRP laminate and the length equal to the anchorage
 9 length. The elastic modulus of the GFRP connection plate in the longitudinal direction is 6.2
 10 GPa according to the laboratory test. The GFRP connection plate is bonded to CFRP laminate
 11 at the workshop with a tailor-made epoxy adhesive and it remains on the CFRP laminate after
 12 strengthening. The epoxy adhesive used between GFRP connection plate and the CFRP
 13 laminate provides specific properties, including (1) satisfactory plastic behavior to avoid the
 14 stress concentration along the bond line, (2) sufficient bond strength, and (3) acceptable
 15 resistance to creep deformation in order to avoid the significant loss of prestressing force during
 16 the curing of the adhesive between the CFRP and concrete substrate. To facilitate the
 17 connection to the prestressing tool, the GFRP connection plate is equipped with embedded hat
 18 nuts at identical intervals equal to the spacing of tabs. The embedded hat nuts enable a bolted
 19 connection between the GFRP connection plate and the tabs in the prestressing tool. As shown
 20 in Figure 5b, each tab is bolted using two M6 high strength bolts to the GFRP connection plate.
 21 In the design phase of the tool, the analysis indicated that a distance of 150 mm between two
 22 neighboring tabs would be optimum to dispense the load.

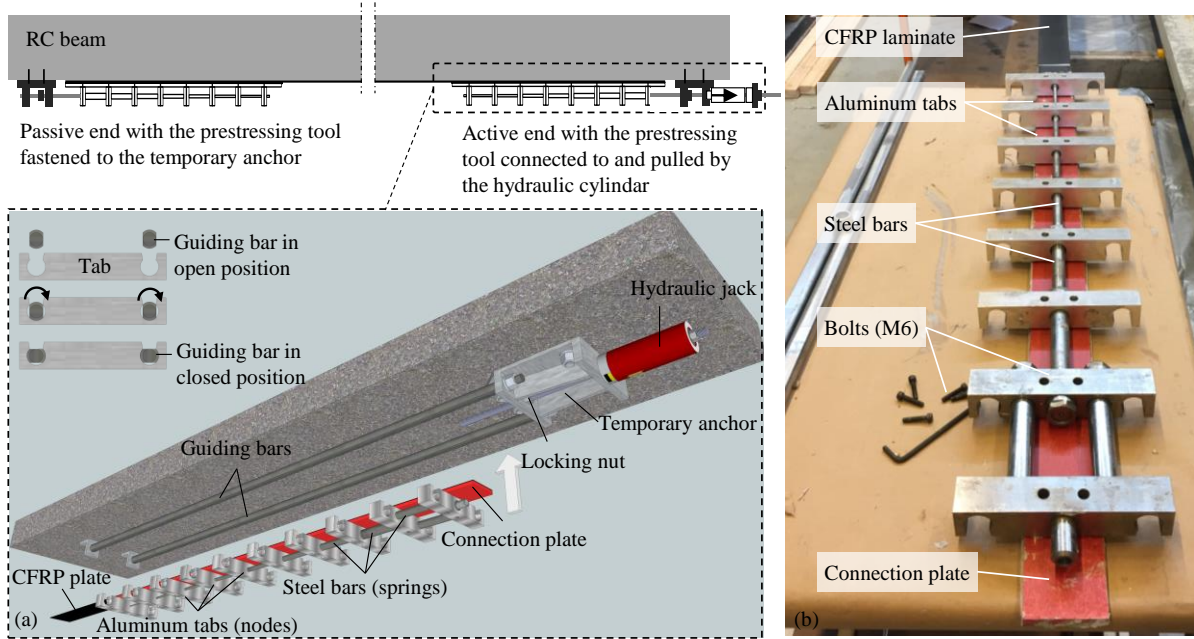


Figure 5. (a) The illustration of the prestressing system, and (b) the prestressing tool connected to a CFRP laminate via a connection plate made of GFRP

Besides the tool, the prestressing system includes other components to provide temporary support for the hydraulic jack during prestressing, see Figure 5a. It shows that two identical sets of the prestressing tool are installed at each end of the CFRP laminate. In the prestressing phase, the tool at the passive end is fastened to the temporary anchor, while the one at the active end is connected to the hydraulic jack. When the introduced maximum prestressing force reaches the design value, the locking nut at the active end is tightened to release the hydraulic jack and leave the bond line to cure. Most of the structural epoxy adhesives develop about 70% of their tensile capacity in room temperature after 24 hours, which is well above the concrete tensile strength. Therefore, 24 hours of curing time can be accepted as a safe choice before demounting the whole prestressing system. During the curing time, the structure can be in service since the prestressing force is safely anchored to the structure and the ultimate load capacity of the strengthened structure is not affected by the vibrations as demonstrated by Reed et al. [25]. In cases a shorter curing time is required, the accelerated curing technique aided by a heating element can be implemented to obtain enough bond capacity within a shorter time. Once the epoxy adhesive is sufficiently cured, the prestressing system can be safely demounted. The demounting procedure includes firstly opening the locking nut (see Figure 5a) and then removing the M6 bolts (see Figure 5b) to detach the prestressing tool from the connection plate. The connection plate will remain bonded on the CFRP plate after the operation.

3 Experimental verification

The proposed method was implemented to strengthen an RC beam in which the CFRP laminate was prestressed up to 100 kN. An epoxy adhesive was used to bond the laminate to the RC beam. In this experiment, the prestressing tool included 8 tabs (see Figure 5). The length of the connection plate was 1250 mm with a center-to-center distance of tabs equal to 150 mm. Strains in the CFRP laminate were monitored using 19 strain gauges during prestressing operation and 144 hours after prestressing to study the axial force distribution in the laminate and the prestressing loss in the laminate. This beam was tested in the context of another experimental program whose result will be published separately.

1 3.1 Materials and specimen preparation

2 A 4.5m long RC beam with cross-sectional dimensions of 200×300 mm² was used in the
3 experiment. The concrete beam was cast at the workshop using C35/45 concrete verified by
4 the compressive test of concrete cylinders in the laboratory. Two steel reinforcement bars
5 (K500C) with a diameter of 16 mm were placed in compression and tension zones. Transverse
6 stirrups (K500C) with a diameter of 10 mm were equally placed at 75 mm over the entire beam
7 length. The concrete cover was 70 mm. The mechanical properties of the steel reinforcement
8 were measured in the lab. The elastic modulus, the yield strength, and the ultimate strength of
9 longitudinal bars were determined to be 201 GPa, 510 MPa, and 618 MPa, respectively.

10 A unidirectional CFRP laminate (StoFRP[®] IM 80C), supplied by Sto[®] with a nominal cross-
11 section of 80×1.45 mm² and a length of 3.8 meter, was used to strengthen the concrete beam.
12 The mechanical properties of the laminate were obtained by testing coupons according to
13 ASTM D3039 [26]. The elastic modulus and the ultimate tensile strain were measured to be
14 214 GPa and 12.7%, respectively.

15 A two-component epoxy adhesive (StoPox SK41), recommended by the supplier, was used to
16 bond the CFRP laminate to the RC beam. The elastic modulus and the tensile strength of the
17 epoxy were 7.1 GPa and 34 MPa after 14 days of curing in room temperature as reported by
18 Heshmati et al. [27]. The design thickness of the adhesive bond line was 1 mm. Poisson's ratio
19 was assumed to be 0.2 for concrete and 0.3 for other materials.

20

21 3.2 Prestressing the CFRP laminate

22 Components of the prestressing system illustrated in Figure 5 will be referenced in this section.
23 The process of applying the stepwise prestressing method includes the following steps in brief:

- 24 1. Install the temporary anchors on both the active and the passive ends;
- 25 2. Prepare the concrete surface according to recommendations in available guidelines. The
26 surface of the beam in the experiment was ground with an angle grinder followed by
27 compressed air and vacuum cleaning;
- 28 3. Mount the prestressing tool to CFRP at each end via the connection plate;
- 29 4. Apply the epoxy adhesive on the surface of the concrete and place the CFRP laminate
30 (attached with the prestressing tools) on the concrete beam;
- 31 5. At the passive end, fasten the prestressing tool to the temporary anchor. At the active
32 end, connect the prestressing tool to the hydraulic jack;
- 33 6. Pump the hydraulic jack to pull the prestressing tool on the active end until the load cell
34 shows a force of 100 kN;
- 35 7. Tighten the locking nut on the active end and release the hydraulic jack. To be
36 highlighted, the prestressing operation and releasing was completed within 10 minutes,
37 which was considerably shorter than the epoxy adhesive pot life (e.g. about 30 minutes);
- 38 8. Leave the adhesive to cure for at least 24 hours as recommended;
- 39 9. Remove the prestressing tools after the curing of adhesive. In the experiment, the
40 prestressing tool was removed after 6-day-curing due to the monitoring of the prestress
41 loss;

42 The self-anchorage of the prestressed CFRP laminate was realized by implementing the
43 stepwise prestressing method, see Figure 6.



Figure 6. Self-anchored prestressed CFRP laminate on the RC beam after removing the prestressing tool and temporary anchors

3.3 Instrumentation and measurements

To monitor the strain distribution and prestress loss, 19 strain gauges were installed along the CFRP laminate as illustrated in Figure 7. The locations of strain gauges were selected so that a strain gauge was placed between two subsequent tabs in the prestressing tool (see Figure 5). The strains were monitored during prestressing and 6 days after till the tool was detached from the beam.

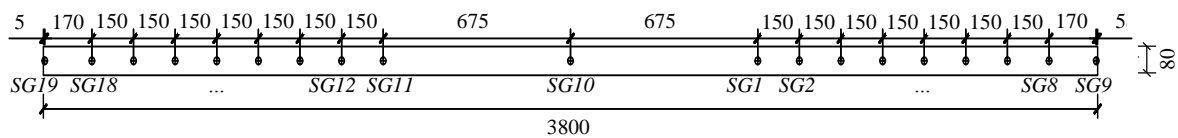


Figure 7. The location of strain gauges installed on the CFRP laminate

4 Finite element analysis

The finite element (FE) analysis in this study mainly covers the numerical simulation of two phases: (a) the prestressing process in which the force transfers through the prestressing tool to the CFRP laminate; and (b) the redistribution of the prestressing force between the CFRP laminate and the beam after removing the prestressing tool. The FE analysis aims to obtain a better understanding of the stress state in the concrete substrate and evaluate the effectiveness of the proposed method with regard to reducing interfacial stresses along the bond line.

4.1 Modeling

A two-dimensional (2D) shell model was developed using commercial FE package Abaqus ver. 6.14. With regard to the symmetry of the beam, only half of the specimen was modeled. All parts except the steel reinforcement bars and prestressing tool were modeled using 2D shell elements (CPS4R, plane stress). The longitudinal reinforcement bars and stirrups were modeled using truss elements (T2D2) embedded in the concrete. The prestressing tool was simply modeled using truss elements (T2D2) as links with distinct corresponding cross-sectional area representing to the spring stiffness. Tie constraints were assigned to create surface-to-surface interactions between different parts including concrete/epoxy, epoxy/CFRP, CFRP/adhesive, and adhesive/connection plate. Node-to-node tie was defined between aluminum tabs and the connection plate to represent the bolted connection. The analysis defined 3 steps. In step 1, the adhesive layer was deactivated, and the prestressing force was


1 applied to pull the tool; the same reaction force was defined on the concrete beam to simulate
 2 the effect from the temporary anchor. In step 2, the adhesive layer was reactivated to simulate
 3 the cured bond line. In step 3, the forces were suppressed to allow force redistribution between
 4 the concrete and CFRP laminate to simulate the removal of prestressing tool. All materials
 5 were assigned with linear elastic properties as mentioned in section 3.1.

6 5 Results and discussion

7 5.1 Experimental results

8 5.1.1 Distribution of tensile strain along the CFRP laminate

9 The strain distribution was monitored along the laminate length during the prestressing process
 10 and 6 days afterward. Figure 8 shows the distribution profile of tensile strains measured by 19
 11 strain gauges at different prestressing levels. The effect of stepwise prestressing is
 12 demonstrated by gradually decreasing tensile strains over the anchorage length (i.e. 1250 mm)
 13 from each end of the laminate.

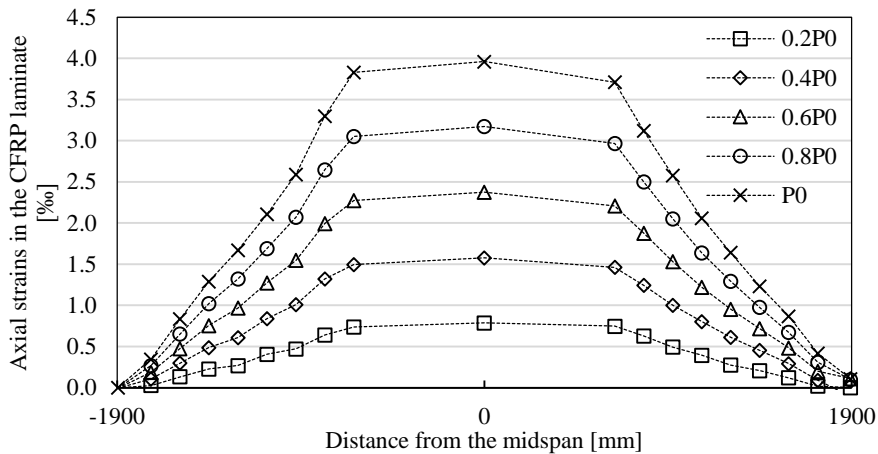

14
 15 Figure 8. Tensile strains in the prestressed CFRP laminate measured by strain gauges during the prestressing process; P_0
 16 denotes the maximum prestressing force introduced to the CFRP.


17

18 5.1.2 Loss of prestressing force during the curing of adhesive layer

19 Pumping the hydraulic jack was stopped when the load cell displayed a force of 100 kN. At
 20 this moment, strain gauge SG10, located in the middle of CFRP, displayed a strain value equal
 21 to 3850 μ strain equivalent to a force of 95.6 kN. The difference of 4.4 kN in force is attributed
 22 to the friction in the prestressing tool. The slender concrete beam used in this study was slightly
 23 cambered as a result of prestressing. Inevitably, the guiding bars followed the slightly curved
 24 profile of the beam, which caused the friction between the tabs and guiding bars. After stopping
 25 pumping, the locking nut was tightened using a small wrench which increased the tensile strains
 26 in the laminate; and the strain in SG10 increased to 3960 μ strain equivalents to 98.3 kN, see
 27 Figure 9.

28 The beam was then left at room temperature for 6 days to cure the epoxy adhesive as
 29 recommended by the supplier. Figure 9 demonstrates the variation of strains in the middle of
 30 the CFRP laminate (SG10) during the 6 days after tightening the locking nut. It shows that,
 31 during this period, the strain drops to 3610 μ strain (equivalent to 89.6 kN), which is mainly
 32 attributed to a large extent of creep deformation in the concrete beam and a limited extent to
 33 creep in the adhesive used to bond the connection plate to the CFRP laminate. The tensile strain

1 at the midspan decreased by 8.8% (from 3960 μ strain to 3610 μ strain) after 48 hours and
 2 remained almost constant afterward. The corresponding prestressing level decreased by 2.7%
 3 from 31.1% to 28.4% of the CFRP laminate ultimate strength. Although the prestressing level
 4 became stable after 48 hours, 90% of the prestressing loss took place in the first 8 hours.
 5 After 6 days, the locking nuts on both ends were released, and the prestressing tools removed.
 6 Subsequently, the strain value in SG10 reduced to 3481 μ strain (equivalent to 86.4 kN) after
 7 removing the prestressing tool. The main reason for this drop is the change in the lever arm of
 8 prestressing force which switched from temporary anchor level to laminate level causing a
 9 secondary redistribution in the system. The overall prestressing loss in this experiment is
 10 considered acceptable given the geometry of the tested beam and great potential for creep.

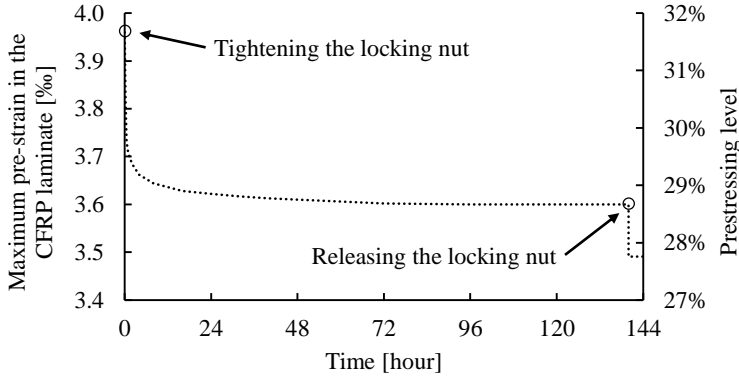

11
 12 Figure 9. Variation of the strain in CFRP laminate at midspan during 144 hours after prestressing
 13

14 5.1.3 Interfacial shear stress in the bond line

15 When the locking nut is released and the prestressing tool is demounted, the average interfacial
 16 shear stress along the bond line can be estimated using differential strains from subsequent
 17 strain gauges according to the equation Eq. 2.

$$\tau_i^{i+1} = \frac{(\varepsilon_{f,i+1} - \varepsilon_{f,i})E_{CFRP}t_{CFRP}}{x_{i+1} - x_i} \quad \text{Eq. 2}$$

18 where τ_i^{i+1} is the average shear stress between SG i and SG $(i+1)$; E_{CFRP} is the modulus of the
 19 elasticity of the CFRP laminate; t_{CFRP} is the thickness of the CFRP laminate; and $(x_{i+1} - x_i)$
 20 is the distance between SG i and SG $(i+1)$, e.g. 150 mm in this experiment. The interfacial
 21 shear stresses are presented in Figure 10, where $\tau_{avg.interval}$ represents the average interfacial
 22 shear stress at each interval from Equation 2. As can be seen, the maximum value of $\tau_{avg.interval}$
 23 is less than 1.5 MPa, and the average value of $\tau_{avg.interval}$ over the anchorage length L_0 is 0.80MPa
 24 and 0.85MPa at each end. Assuming a constant distribution of the shear stress within each
 25 interval, the strength of the concrete becomes sufficient to resist the shear stress due to the
 26 transfer of the prestressing force from the CFRP laminate to the concrete beam. However, there
 27 exists a variation of shear stress at each interval. These variations are studied more accurately
 28 using FE method and the FE results are discussed in the following section.

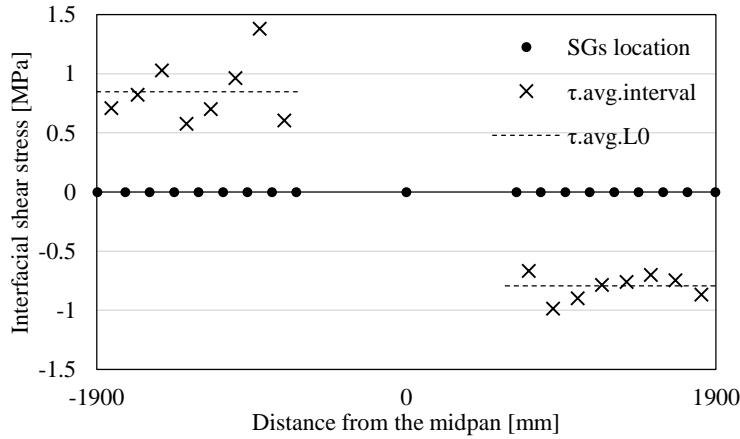


Figure 10. Average interfacial shear stress in the adhesive bond line after removing the prestressing system

5.2 The FE results

5.2.1 Strain profile in the CFRP laminate after prestressing

At the end of prestressing process (i.e. fastening the locking nut), the tensile strain at the SG 10 reached a maximum value of 3960 μ strain, which was equivalent to an axial force of 98.3 kN in the prestressed laminate. The same force was applied in the FE analysis at the end of the prestressing tool to eliminate the effect of friction as explained earlier.

Figure 11 shows the strain profile along the CFRP, including FE results, experimental results from strain gauges and results from the analytical solution based on axial stiffness of different components in the prestressing system. Since the strain gauges are placed symmetrically with respect to midspan, the strain gauge data in Figure 11 is presented according to the distance from the midspan. The calculation of the analytical solution assumed full interaction (perfect bond with no relative slip) between the CFRP laminate, the connection plate, and the prestressing tool. Given a certain prestressing force P_0 , the axial force in the CFRP over the anchorage length could be calculated by the equation Eq. 3.

$$P_{CFRP} = \frac{(EA)_{CFRP}}{(EA)_{CFRP} + (EA)_{connection\ plate} + (EA)_{spring}} P_0 \quad \text{Eq. 3}$$

Where EA is the axial stiffness of each component of the prestressing system as shown in Figure 4. Figure 11 shows a good agreement between the FE and analytical results. However, they underestimate the strains in comparison to the experiment. This observation can be attributed to the fact that, in the FE analysis, the interaction between tabs and connection plate consists of a tie constrain coupling all degrees of freedom (full interaction). In reality, however, over-stressing in some steps (particularly at the bolted connections between tabs and connection plate close to the midspan) would result in local embedment damage in the connection plate and the slight change of the stiffness properties in that step. The overall adjustment of stiffness, apparently, acts in favor of a more uniform force distribution among different steps.

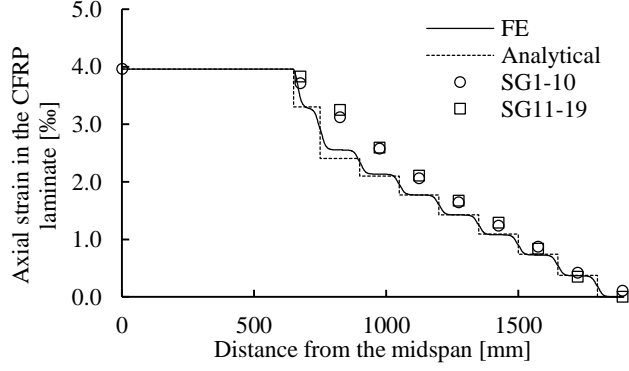


Figure 11. Tensile strain in the CFRP laminate using the stepwise prestressing method subjected to a maximum prestressing force of 98.3 kN

5.2.2 Interfacial stress along the bond line after removing the prestressing tool

Prior to the release of the locking nut, the prestressing force was concentrated and exerted to the beam at temporary anchors. Upon releasing the locking nut, the prestressing force transferred to the beam via the CFRP-concrete adhesive bond. This transfer was associated with the formation of interfacial shear stresses along the adhesive bond line. The FE analysis was used to study the interfacial stress along the bond line in more detail. To model the beam in a more realistic manner, the prestressing force assigned to the laminate in the FE model was calibrated according to the experimental results in order to represent the stressed state of the laminate in reality before releasing the locking nut; in specific, eight concentrated forces were applied along the laminate at the locations of the tabs. The magnitude of the forces was calculated based on the tensile strains from two subsequent strain gauges (see Eq. 4).

$$P_{tab.i} = (\varepsilon_{SG(i+1)} - \varepsilon_{SGi})[(EA)_{CFRP} + (EA)_{connection\ plate}] \quad for\ i = 1\ to\ 7$$

$$P_{tab.8} = \varepsilon_{SG10}(EA)_{CFRP} - \varepsilon_{SG8}[(EA)_{CFRP} + (EA)_{connection\ plate}]$$

Eq. 4

Figure 12 shows the profile of the strain distribution before and after releasing the locking nut from FE analysis together with experimental readings from strain gauges. As mentioned previously, upon the release of the locking nut, an internal force redistribution takes place in the system. As seen, the strain profile in the FE analysis after release matches well with the values from strain gauges (SG1-10 and SG11-19). The agreement assures reliable results on interfacial stresses along the bond line and in the concrete substrate calculated from the FE model. Figure 12 also reveals that the distribution of tensile strain does not significantly change before and after the release of the locking nut (difference less than 4%) and the prestressing level within the anchorage length retains the expected stepwise profile and magnitude.

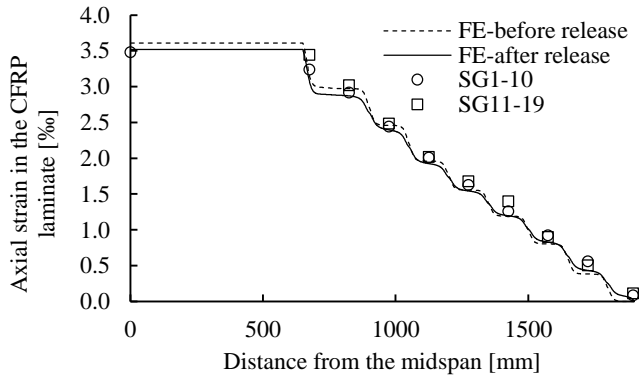



Figure 12. Axial strain profile in the CFRP laminate before and after releasing the locking nut according to the FE results and experimental measurements with strain gauges

Figure 13(a) shows the FE results after the release of the locking nut, including the strain profile along the CFRP laminate, the shear stress in the mid-thickness of the adhesive layer between concrete and CFRP, and the shear stress in the concrete, 1 mm beneath the concrete-epoxy interface. The magnitude of peak interfacial shear stress at the mid-thickness of the epoxy later within the anchorage length ranges between 1.8 MPa and 2.6 MPa, which occur at the location of tabs. The concrete substrate is the weak link in the bonded joint. Therefore, it would be interesting to study the magnitude of shear stress inside the concrete just below the adhesive layer. As shown in Figure 13(a), the shear stress, 1 mm beneath the concrete surface, has a peak value of about 0.9 MPa. The reduced interfacial shear stress in the concrete lays the foundation for the self-anchorage of the CFRP laminate after removing the prestressing tool. The magnitude of the peeling (normal) stress is smaller compared to shear stress along the anchorage length and ranges between -0.1 MPa to 0.1 MPa, see Figure 14(a). Except for the critical location (650 mm from the midspan) where the GFRP connection plate is terminated, the peeling stress reaches the maximum peak values at the end of the CFRP-concrete bond, where the maximum peeling stresses are 1.5 MPa and 0.5 MPa in the adhesive layer and 1mm beneath the concrete surface, respectively. As a result, the maximum principal stress as shown in Figure 14(b) yields to 2.7 MPa and 1.2 MPa in the adhesive layer and concrete, respectively, at the end of the bonded CFRP laminate.


To evaluate safety margin of the CFRP-concrete bond, the local bond strength τ_{max} is calculated using the equation Eq. 5 proposed by Lu et al. [28], which is the function of concrete strength and geometry of the bond. The bond strength τ_{max} of the investigated specimen is estimated to be 5.7 MPa using this equation.

$$\tau_{max} = 1.50f_{ct} \sqrt{\frac{2.25 - b_{CFRP}/b_c}{1.25 + b_{CFRP}/b_c}} \quad \text{Eq. 5}$$

Where f_{ct} is the tensile strength of the aged concrete C35/45; b_{CFRP} and b_c are the width of the CFRP laminate and the concrete beam, respectively. Compared to the local bond strength, the peak interfacial shear stress of 0.9 MPa accounts for 16% of the bond capacity, representing a good margin of safety.

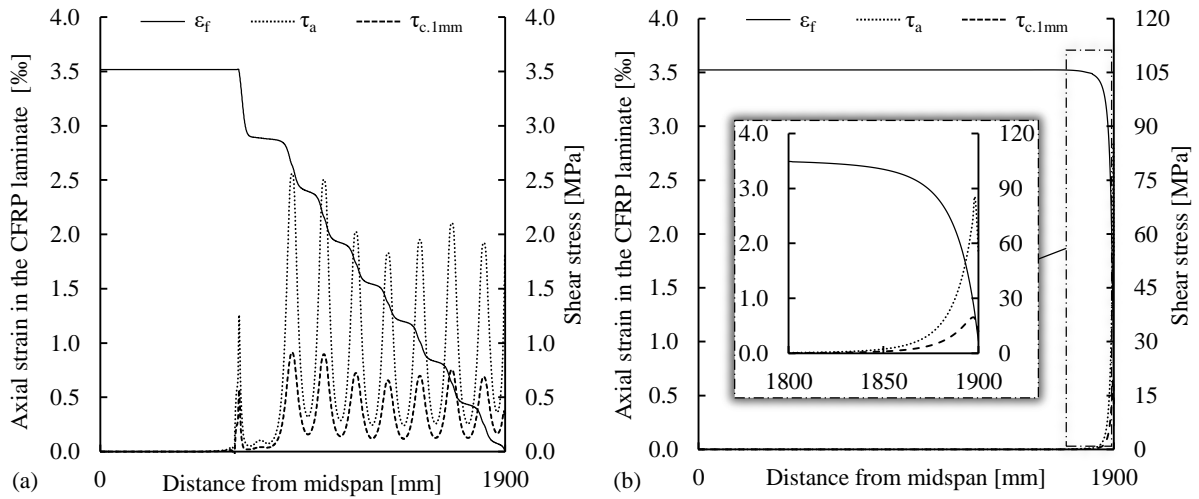

1
2 Figure 13. FE results based on the modeling of (a) stepwise prestressing method and (b) conventional prestressing method,
3 including the axial strain in the CFRP laminate after releasing the locking nut ϵ_f , the shear stress in the adhesive layer τ_a , and
4 1 mm beneath the concrete surface $\tau_{c.1mm}$.

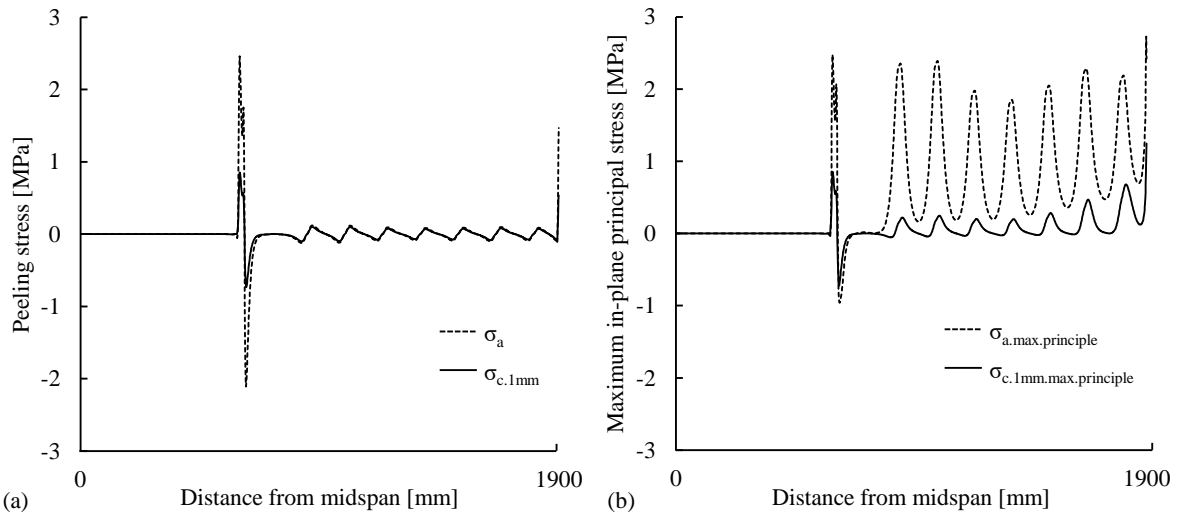

5
6 Figure 14. FE results of the stepwise prestressing method regarding (a) the peeling stress and (b) maximum principal stress in
7 the adhesive layer and 1 mm beneath the concrete surface

8 5.3 Effectiveness of stepwise prestressing system

9 In conventional prestressing systems, the CFRP laminate is pulled from a point (usually the
10 laminate end). In this manner, a uniform axial force would be created along the laminate length.
11 After removing the prestressing force, large interfacial stress would be built up in bond line at
12 areas close to laminate ends which eventually cause laminate debonding in the absence of
13 mechanical anchorage [14]. To evaluate the effectiveness of the novel stepwise prestressing
14 system, it would be interesting to compare the interfacial shear stresses in the two prestressing
15 methods subjected to the same level of prestressing force. Figure 13(b) shows the FE results
16 from the conventional prestressing method with regard to the tensile strain in the laminate and
17 shear stress in the adhesive layer and concrete after the release of the prestressing force. The
18 sudden drop of the tensile strain in the CFRP close to the end of laminate indicates a short
19 anchorage length of about 100 mm, which is associated with significant high shear stress in the
20 concrete substrate (ca. 20 MPa at 1mm beneath the concrete surface). In contrast, the stepwise
21 prestressing system results in the peak shear stress as low as 0.9 MPa, which renders a

1 significant reduction of 22 times. It is observed that the stepwise prestressing method extends
2 the anchorage length from approximately 100 mm in the conventional prestressing to 1250 mm.
3 It should be noted that the area under the shear stress curve in both cases is the same since the
4 total prestressing forces are equal.

5 **6 Conclusions**

6 This paper investigated the efficiency of a novel method to prestress CFRP laminates used as
7 externally bonded reinforcement using numerical and experimental approach. The innovative
8 feature of the proposed prestressing method is to eliminate the need for mechanical anchorage
9 and realize the self-anchorage of the laminate after removing the prestressing system.

10 Results indicate that the proposed method provides a gradual transfer of the prestressing force
11 from the CFRP laminate to the concrete beam. As a result, the interfacial stresses along the
12 bond line can be reduced below the strength of the concrete substrate to realize the self-
13 anchorage of the prestressed laminate. Results from FE analyses indicate that peak interfacial
14 shear stresses, as low as 2.6 MPa in the adhesive layer and 0.9 MPa in the concrete substrate,
15 occur in the CFRP-concrete adhesive joint given a maximum prestressing force of 90 kN in the
16 bonded CFRP laminate. The shear stress in the concrete substrate accounts for 16% of the local
17 CFRP-concrete bond strength, which ensures the safe self-anchorage of the prestressed
18 laminate. Overall, the proposed method is considered practical with respect to application time
19 and straightforward procedure. Although this paper presents the application of this technique
20 for strengthening of reinforced concrete beams, the method has the potential for strengthening
21 steel girders, where the conventional mechanical anchors involves drilling holes in flanges
22 which is not desirable from fatigue performance point of view.

23 **7 Acknowledgment**

24 The work in the paper is a part of SUREBridge (Sustainable Refurbishment of Existing Bridges)
25 project which has received funding from the European Union's Seventh Framework
26 Programme for research, technological development and demonstration. The SUREBridge
27 project is co-funded by Funding Partners of the ERA-NET Plus Infravation program.

28 **8 References**

- 29 [1] Motavalli M, Czaderski C, Pfyl-Lang K. Prestressed CFRP for Strengthening of
30 Reinforced Concrete Structures: Recent Developments at Empa, Switzerland. *J Compos*
31 *Constr* 2011;15:194–205. doi:10.1061/(ASCE)CC.1943-5614.0000125.
- 32 [2] André A, Haghani R, Biel A. Application of fracture mechanics to predict the failure load
33 of adhesive joints used to bond CFRP laminates to steel members. *Constr Build Mater*
34 2012;27:331–40. doi:10.1016/j.conbuildmat.2011.07.040.
- 35 [3] Ghafoori E, Hosseini A, Al-Mahaidi R, Zhao X-L, Motavalli M. Prestressed CFRP-
36 strengthening and long-term wireless monitoring of an old roadway metallic bridge. *Eng*
37 *Struct* 2018;176:585–605. doi:10.1016/j.engstruct.2018.09.042.
- 38 [4] Kliger R, Haghani R, Brunner M, Harte AM, Schober K-U. Wood-based beams
39 strengthened with FRP laminates: improved performance with pre-stressed systems. *Eur*
40 *J Wood Wood Prod* 2016;74:319–30. doi:10.1007/s00107-015-0970-5.
- 41 [5] Heshmati M, Haghani R, Al-Emrani M. Durability of CFRP/steel joints under cyclic wet-
42 dry and freeze-thaw conditions, *Composites Part B*, 2017, 126:211-226.
- 43 [6] Ali A, Abdalla J, Hawileh R, Galal K. CFRP mechanical anchorage for externally
44 strengthened RC beams under flexure, 2014, *Physics Procedia*, 55:10-16.

- 1 [7] Teng J, Chen J, Smith S, Lam L. Behaviour and strength of FRP-strengthened RC
2 structures: a state-of-the-art review. Proc ICE- Struct Build 2003;51–62.
3 doi:10.1680/stbu.2003.156.1.51.
- 4 [8] Triantafillou TC, Deskovic N. Innovative Prestressing with FRP Sheets: Mechanics of
5 Short-Term Behavior. J Eng Mech 1991;117:1652–72. doi:10.1061/(ASCE)0733-
6 9399(1991)117:7(1652).
- 7 [9] Meier U. Strengthening of structures using carbon fibre/epoxy composites. Constr Build
8 Mater 1995;9:341–51. doi:10.1016/0950-0618(95)00071-2.
- 9 [10] Garden HN, Holloway LC. An experimental study of the failure modes of reinforced
10 concrete beams strengthened with prestressed carbon composite plates. Compos Part B
11 Eng 1998;29:411–24. doi:10.1016/S1359-8368(97)00043-7.
- 12 [11] Quantrill RJ, Holloway LC. The flexural rehabilitation of reinforced concrete beams by
13 the use of prestressed advanced composite plates. Compos Sci Technol 1998;58:1259–75.
14 doi:10.1016/S0266-3538(98)00002-5.
- 15 [12] Aslam M, Shafigh P, Jumaat MZ, Shah SNR. Strengthening of RC beams using
16 prestressed fiber reinforced polymers – A review. Constr Build Mater 2015;82:235–256.
17 doi:10.1016/j.conbuildmat.2015.02.051.
- 18 [13] Haghani R. Analysis of adhesive joints used to bond FRP laminates to steel members – A
19 numerical and experimental study. Constr Build Mater 2010;24:2243–51.
20 doi:10.1016/j.conbuildmat.2010.04.032.
- 21 [14] Triantafillou TC, Deskovic N, Deuring M. Strengthening of concrete structures with
22 prestressed fiber reinforced plastic sheets. ACI Struct J 1992;89:235–44.
- 23 [15] Kalfat R, Al-Mahaidi R, Smith ST. Anchorage Devices Used to Improve the Performance
24 of Reinforced Concrete Beams Retrofitted with FRP Composites: State-of-the-Art
25 Review. J Compos Constr 2013;17:14–33. doi:10.1061/(ASCE)CC.1943-5614.0000276.
- 26 [16] Kim YJ, Wight RG, Green MF. Flexural Strengthening of RC Beams with Prestressed
27 CFRP Sheets: Development of Nonmetallic Anchor Systems. J Compos Constr
28 2008;12:35–43. doi:10.1061/(ASCE)1090-0268(2008)12:1(35).
- 29 [17] Kim YJ, Wight RG, Green MF. Flexural Strengthening of RC Beams with Prestressed
30 CFRP Sheets: Using Nonmetallic Anchor Systems. J Compos Constr 2008;12:44–52.
31 doi:10.1061/(ASCE)1090-0268(2008)12:1(44).
- 32 [18] Grelle SV, Sneed LH. Review of Anchorage Systems for Externally Bonded FRP
33 Laminates. Int J Concr Struct Mater 2013;7:17–33. doi:10.1007/s40069-013-0029-0.
- 34 [19] Stöcklin I, Meier U. Strengthening of concrete structures with prestressed and gradually
35 anchored CFRP strips. FRPRCS-5 Fibre-Reinf. Plast. Reinf. Concr. Struct. Vol. 1,
36 Thomas Telford Publishing; 2001, p. 291–6. doi:10.1680/frprcsv1.30299.0030.
- 37 [20] Michels J, Sena-Cruz J, Czaderski C, Motavalli M. Structural Strengthening with
38 Prestressed CFRP Strips with Gradient Anchorage. J Compos Constr 2013;17:651–61.
39 doi:10.1061/(ASCE)CC.1943-5614.0000372.
- 40 [21] Kotynia R, Walendziak R, Stoecklin I, Meier U. RC Slabs Strengthened with Prestressed
41 and Gradually Anchored CFRP Strips under Monotonic and Cyclic Loading. J Compos
42 Constr 2010;15:168–80. doi:10.1061/(ASCE)CC.1943-5614.0000081.
- 43 [22] Czaderski C, Motavalli M. 40-Year-old full-scale concrete bridge girder strengthened
44 with prestressed CFRP plates anchored using gradient method. Compos Part B Eng
45 2007;38:878–86. doi:10.1016/j.compositesb.2006.11.003.
- 46 [23] Haghani R, Al-Emrani M, Kliger R. A new method for strengthening concrete structures
47 using prestressed FRP laminates. Proceeding 8th Int. Struct. Eng. Constr. Conf., 2015, p.
48 1153–8.

- 1 [24] Haghani R, Al-Emrani M, Kliger R. Interfacial stress analysis of geometrically modified
2 adhesive joints in steel beams strengthened with FRP laminates. *Constr Build Mater*
3 2009;23:1413–22. doi:10.1016/j.conbuildmat.2008.07.013.
- 4 [25] Reed MW, Barnes RW, Schindler AK, Lee H-W. Fiber-Reinforced Polymer
5 Strengthening of Concrete Bridges that Remain Open to Traffic. *Struct J* 2005;102:823–
6 31. doi:10.14359/14790.
- 7 [26] ASTM International. *ASTM D3039/D3039M-17 Standard Test Method for Tensile*
8 *Properties of Polymer Matrix Composite Materials*. West Conshohocken, PA: ASTM
9 International; 2017.
- 10 [27] Heshmati M, Haghani R, Al-Emrani M. Durability of bonded FRP-to-steel joints: Effects
11 of moisture, de-icing salt solution, temperature and FRP type. *Compos Part B Eng*
12 2017;119:153–67. doi:10.1016/j.compositesb.2017.03.049.
- 13 [28] Lu XZ, Teng JG, Ye LP, Jiang JJ. Bond-slip models for FRP sheets/plates bonded to
14 concrete. *Eng Struct* 2005;27:920–937. doi:10.1016/j.engstruct.2005.01.014.
- 15