



Data-driven modelling of hydraulic-head time series: results and lessons learned from the 2022 Groundwater Time Series Modelling Challenge

Downloaded from: <https://research.chalmers.se>, 2024-12-21 06:32 UTC

Citation for the original published paper (version of record):

Collenteur, R., Haaf, E., Bakker, M. et al (2024). Data-driven modelling of hydraulic-head time series: results and lessons learned from the 2022 Groundwater Time Series Modelling Challenge. *Hydrology and Earth System Sciences*, 28(23): 5193-5208. <http://dx.doi.org/10.5194/hess-28-5193-2024>

N.B. When citing this work, cite the original published paper.



Data-driven modelling of hydraulic-head time series: results and lessons learned from the 2022 Groundwater Time Series Modelling Challenge

Raoul A. Collenteur¹, Ezra Haaf², Mark Bakker³, Tanja Liesch⁴, Andreas Wunsch⁵, Jenny Soonthornrangsan²⁷, Jeremy White⁶, Nick Martin⁷, Rui Hugman⁶, Ed de Sousa⁶, Didier Vanden Berghe⁸, Xinyang Fan^{9,10}, Tim J. Peterson¹¹, Jānis Bikše¹², Antoine Di Ciacca¹³, Xinyue Wang¹⁴, Yang Zheng¹⁴, Maximilian Nölscher¹⁵, Julian Koch¹⁶, Raphael Schneider¹⁶, Nikolas Benavides Höglund¹⁷, Sivarama Krishna Reddy Chidepudi^{18,19}, Abel Henriot¹⁹, Nicolas Massei¹⁸, Abderrahim Jardani¹⁸, Max Gustav Rudolph²⁰, Amir Rouhani²¹, J. Jaime Gómez-Hernández²², Seifeddine Jomaa²¹, Anna Pözl^{23,24}, Tim Franken²⁵, Morteza Behbooei²⁶, Jimmy Lin²⁶, and Rojin Meysami²⁶

¹Department Water Resources and Drinking Water (W+T), Eawag, Duebendorf, Switzerland

²Department of Architecture and Civil Engineering, Chalmers University of Technology, Gothenburg, Sweden

³Department of Water Management, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Delft, the Netherlands

⁴Institute of Applied Geosciences, Division of Hydrogeology, Karlsruhe Institute of Technology, Karlsruhe, Germany

⁵Fraunhofer Institute of Optronics, System Technologies and Image Exploitation IOSB, Karlsruhe, Germany

⁶Intera, Fort Collins, Colorado, USA

⁷Southwest Research Institute (SWRI), San Antonio, Texas, USA

⁸Burgeap, Ginger Group, Lyon, France

⁹Department of Geography and Geosciences, GeoZentrum Nordbayern, Friedrich-Alexander-University Erlangen-Nuremberg (FAU), Erlangen, Germany

¹⁰Institute of Geography & Oeschger Center for Climate Change Research, University of Bern, Bern, Switzerland

¹¹Department of Civil Engineering, Monash University, Clayton, Australia

¹²Department of Geology, University of Latvia, Riga, Latvia

¹³Environmental Research, Lincoln Agritech Ltd, Lincoln, New Zealand

¹⁴Data Science Institute (DSI), Brown University, Providence, Rhode Island, USA

¹⁵German Federal Institute for Geoscience and Resources (BGR), Berlin, Germany

¹⁶Department of Hydrology, Geological Survey of Denmark and Greenland (GEUS), Copenhagen, Denmark

¹⁷Department of Geology, Lund University, Lund, Sweden

¹⁸Morphodynamique Continentale et Côtière, Univ. Rouen Normandie, UNICAEN, CNRS, M2C UMR 6143, 76000 Rouen, France

¹⁹BRGM, 3 av. C. Guillemin, 45060 Orleans CEDEX 02, France

²⁰Institute of Groundwater Management, Dresden University of Technology, Dresden, Germany

²¹Department of Aquatic Ecosystem Analysis and Management, Helmholtz Centre for Environmental Research – UFZ, Magdeburg, Germany

²²Institute for Water and Environmental Engineering, Universitat Politècnica de València, Valencia, Spain

²³Institute of Hydraulic Engineering and Water Resources Management, TU Wien, Vienna, Austria

²⁴Interuniversity Cooperation Centre Water and Health, Vienna, Austria

²⁵Sumaqua, Louvain, Belgium

²⁶David R. Cheriton School of Computer Science, University of Waterloo, Waterloo, ON, Canada

²⁷Department of Geoscience & Engineering, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Delft, the Netherlands

Correspondence: Raoul A. Collenteur (raoul.collenteur@eawag.ch)

Received: 9 April 2024 – Discussion started: 14 May 2024

Revised: 23 August 2024 – Accepted: 2 October 2024 – Published: 4 December 2024

Abstract. This paper presents the results of the 2022 Groundwater Time Series Modelling Challenge, where 15 teams from different institutes applied various data-driven models to simulate hydraulic-head time series at four monitoring wells. Three of the wells were located in Europe and one was located in the USA in different hydrogeological settings in temperate, continental, or subarctic climates. Participants were provided with approximately 15 years of measured heads at (almost) regular time intervals and daily measurements of weather data starting some 10 years prior to the first head measurements and extending around 5 years after the last head measurement. The participants were asked to simulate the measured heads (the calibration period), to provide a prediction for around 5 years after the last measurement (the validation period for which weather data were provided but not head measurements), and to include an uncertainty estimate. Three different groups of models were identified among the submissions: lumped-parameter models (three teams), machine learning models (four teams), and deep learning models (eight teams). Lumped-parameter models apply relatively simple response functions with few parameters, while the artificial intelligence models used models of varying complexity, generally with more parameters and more input, including input engineered from the provided data (e.g. multi-day averages).

The models were evaluated on their performance in simulating the heads in the calibration period and in predicting the heads in the validation period. Different metrics were used to assess performance, including metrics for average relative fit, average absolute fit, fit of extreme (high or low) heads, and the coverage of the uncertainty interval. For all wells, reasonable performance was obtained by at least one team from each of the three groups. However, the performance was not consistent across submissions within each group, which implies that the application of each method to individual sites requires significant effort and experience. In particular, estimates of the uncertainty interval varied widely between teams, although some teams submitted confidence intervals rather than prediction intervals. There was not one team, let alone one method, that performed best for all wells and all performance metrics. Four of the main takeaways from the model comparison are as follows: (1) lumped-parameter models generally performed as well as artificial intelligence models, which means they capture the fundamental behaviour of the system with only a few parameters. (2) Artificial intelligence models were able to simulate extremes beyond the observed conditions, which is contrary to some persistent beliefs about these methods. (3) No overfit-

ting was observed in any of the models, including in the models with many parameters, as performance in the validation period was generally only a bit lower than in the calibration period, which is evidence of appropriate application of the different models. (4) The presented simulations are the combined results of the applied method and the choices made by the modeller(s), which was especially visible in the performance range of the deep learning methods; underperformance does not necessarily reflect deficiencies of any of the models. In conclusion, the challenge was a successful initiative to compare different models and learn from each other. Future challenges are needed to investigate, for example, the performance of models in more variable climatic settings to simulate head series with significant gaps or to estimate the effect of drought periods.

1 Introduction

Time series of hydraulic heads are one of the most important sources of information about groundwater systems. These time series contain information about the subsurface conditions and about the stresses causing the observed fluctuations. Modelling makes such information explicit and increases our understanding of groundwater systems (Shapiro and Day-Lewis, 2022). Modelling is essential to assess the impact of future land use and climatic scenarios on groundwater systems. Although the solution of groundwater-related problems often requires a spatial model, Bakker and Schaars (2019) argue that many problems can be solved by modelling the heads with a point-scale model (i.e. a time series model at a single monitoring well). Over the years, many types of models have been developed to simulate heads measured in a monitoring well. These models range from artificial intelligence to purely statistical models and from simple analytic solutions to complex numerical (3D) models based on physical laws. The choice of a useful model can be challenging due to the wide range of available models for similar tasks. The choice of an appropriate model for a certain task is commonly based on the purpose of the model; on the data availability; and, often, on the previous experience of the modeller (e.g. Addor and Melsen, 2019).

Studies that systematically compare different models can help in model selection. Comparing the performance of different models can help both practitioners and developers to improve existing models by learning from other modelling concepts (Kollet et al., 2017) or calibration approaches (e.g.

Freyberg, 1988). This is commonly mentioned as a reason why hydrologists should be interested in machine learning models (e.g. Haaf et al., 2023; Nolte et al., 2024; Kratzert et al., 2019) as these may result in new knowledge that, in turn, may be used to improve empirical and process-based groundwater models. It is important, however, to be aware that model results are the combined result of the capabilities of the applied method and the choices made by the modeller in applying the method. These choices are often the result of personal judgement (Holländer et al., 2009) or the experience of colleagues (Melsen, 2022), while some choices may simply be erroneous (Menard et al., 2021).

Several studies have compared models to simulate head time series (e.g. Sahoo and Jha, 2013; Shapoori et al., 2015; Wunsch et al., 2021; Zarafshan et al., 2023; Vonk et al., 2024). However, many comparison studies consider only one type of model (e.g. only statistical or process-based models) instead of different types of models. A fair and unbiased comparison of models is not straightforward as a modeller may be more familiar with one model than another or may lack the experience to obtain optimal results for all models used in the comparison. A more fair and less biased comparison may be obtained by asking different modellers to simulate the same data with their model of choice. Simulations can subsequently be evaluated on independent (unseen) data. An example of this approach to model comparison is the karst modelling challenge (Jeannin et al., 2021) where different groups were asked to model a spring discharge time series. The present study was inspired by this project.

The 2022 Groundwater Time Series Modelling Challenge was organized by the first five authors of this paper to compare the performance of different types of groundwater models in simulating hydraulic-head time series under temperate, subarctic, and continental climates. The aim of the modelling challenge was to simulate the heads for a given ~ 15 -year calibration period and to predict the heads for an unknown ~ 5 -year validation period, with the validation itself being performed solely by the organizers of the challenge. The fundamental idea was to investigate the strengths and weaknesses of different approaches rather than to find the “best” model to simulate heads. Spoiler alert: there was no model that performed best based on all performance criteria for all the head series. Teams that wanted to participate were asked to model four time series of hydraulic heads from different regions with their model of choice. A total of 17 teams took up the challenge and submitted results. An analysis of the results is presented in this paper. This paper is organized as follows. First, the setup of the challenge is presented, including the available data and performance metrics used in the evaluation. Next, the submissions are discussed, and their performances are compared. The paper ends with recommendations and conclusions.

2 Setup of the challenge

2.1 Background

The Groundwater Time Series Modelling Challenge was announced publicly at the General Assembly of the European Geophysical Union (EGU) in 2022 (Haaf et al., 2022) and was further advertised via social media and personal communication. The challenge itself was administered through the GitHub platform (<https://github.com/gwmodeling/challenge>, last access: 25 November 2024). On this website, all information and data were made public. All participants had access to the same information. There was no incentive given for participation in the challenge (e.g. there was no award for the best submission) other than the potential co-authorship of this paper.

The modelling rules were kept relatively simple. Participants were provided with several time series of stresses (also called forcings, explanatory variables, or exogenous variables) that might cause the head fluctuations. The goal was to provide predictions of hydraulic heads for a validation period to the organizers; the organizers performed the validation. The participants were allowed to use any model and any or all of the provided stresses, with the only restriction being that they were not allowed to use the observed head data as an explanatory variable (i.e. to predict the heads with historic head measurements). This restriction ensures that the models can be used to learn what stresses and processes result in the observed head dynamics (for example, for use in a traditional process-based groundwater model) rather than the fact that the head at a certain time is strongly related to the head a few time steps prior. Participants were not allowed to use any stresses other than the ones provided to ensure that any differences in the model outcomes were the result of the model and the provided stresses.

Participants were asked to submit the name of their team, their modelling results, and additional information about their modelling procedure using predefined submission formats. Submissions were required to include simulated heads, including uncertainty intervals, for both the period of observed heads and for an additional validation period for which stresses were supplied but where no observed heads were made available. Further information on the submission had to be submitted through a README file in Markdown format. Finally, the modelling rules stated that “The modelling workflow must be reproducible, preferably through the use of scripts, but otherwise described in enough detail to reproduce the results”.

2.2 Provided data

The participants were provided with four time series of hydraulic heads measured in monitoring wells, as well as relevant stresses (e.g. climate data). Three wells are located in Europe (in the Netherlands, Germany, and Sweden), and

one is located in the USA. The wells were selected to cover different hydrogeological settings (porous, fractured, and karstic aquifers; confined and unconfined), different climates (e.g. influenced by snow or not), and other aspects (possible influence by surface water). Additionally, the organizers sought long, mostly gapless times series with high-frequency head measurements (daily to weekly). It is noted here, however, that, because this challenge only considered four wells, no statements can be made about which model performs best for which condition. The initial challenge contained measurements at a fifth monitoring well (named Sweden_1), but because none of the models could predict the measurements in the validation period (i.e. a Nash–Sutcliffe efficiency below zero for all models in the validation period), it was removed from the challenge. Short descriptions of the settings of the monitoring wells and the general locations (country and region) were provided (these were similar to those found below) in addition to the head measurements and the time series of stresses that potentially affect the measured head fluctuations. Exact locations were not provided to guarantee that no team would be able to leverage the publicly available head data to predict the validation period. Detailed descriptions of the geology, setting, subsurface, and construction of the monitoring wells were not provided to limit the challenge to use cases where detailed information about the subsurface is not available. This clearly limited the applicability of process-based models that generally require such information; no teams used such models as a result.

Observed hydraulic-head data were provided for approximately 15 years for each monitoring well. The head data are of a high quality, with minimal gaps and (close to) constant frequency. Measurements were available approximately weekly for the well in Sweden, while daily data were available for all other wells. Head data with regular time intervals were selected to not exclude methods that cannot deal with irregular time series, even though these are often found in practice. Head data were selected from various continental and temperate climates and with seemingly negligible anthropogenic influences. The head series for each of the four wells are shown in Fig. 1, including the distribution of the measurements. A brief description of each monitoring well and its climatic setting is given in the following. The exact descriptions provided to the participants can be found in the Zenodo repository: <https://doi.org/10.5281/zenodo.10438290> (Collenteur et al., 2024).

- The monitoring well in the Netherlands is located in the province of Drenthe in the northern part of the country. The monitoring well has the identification no. B12C0274-001 and was downloaded from <https://www.dinoloket.nl> (last access: 15 September 2022) on 15 September 2022. The well is located in an unconfined aquifer, consisting of a ~ 1.5 m layer of peat material underlain by fine sands. The area is drained by many small ditches and drains. The water table regularly

reaches the surface level. The surface elevation is about 11.33 m above mean sea level, and the well is screened from 0.05 to 0.95 m below the surface in the peat layer. The climate is classified as a temperate oceanic climate, with an average annual precipitation of 876 mm and annual potential evaporation of 559 mm.

- The monitoring well in Germany is located in Bavaria in the southeastern part of the country and is drilled in the Upper Jurassic Malm Karst aquifer. It is a deep, confined aquifer (partially artesian), which is overlain by a local alluvial aquifer in a small river valley. The surface elevation is about 375 m a.s.l., and the head is, on average, 0.9 m below the surface. The climate is classified as continental with warm summers. The average annual precipitation and potential evaporation are approximately equal, with 692 and 641 mm per year, respectively. The well has the ID no. 11149 and the name Gungolfing 928. The head data were downloaded from <https://www.gkd.bayern.de> (last access: 5 May 2022) on 5 May 2022.
- The monitoring well in Sweden is located on a hillside in moraine terrain with shrub- and/or grass-dominated land cover near Abisko National Park above the polar circle. The well is located in an unsorted till, containing both high contents of gravel and fine fractions with normal boulder frequency. The sediment thickness around the wells is between 5 and 10 m. The well is a steel standpipe with a perforated section of approximately 1 m and a diameter of 5.08 cm. The average distance to the groundwater table is 5.8 m, and the length of the pipe is 7.4 m, approximately reaching the fractured granitic bedrock. The climate is classified as subarctic, with cold summers and an average annual temperature around 0 °C. This location has the lowest amounts of average annual precipitation (353 mm per year) and potential evaporation (332 mm per year). The head data were downloaded from <https://www.sgu.se/grundvatten/grundvattennivaer/matstationer/> (last access: 17 May 2022) (site ID: Abisko 8) on 17 May 2022 and were processed using linear regression to fill short gaps and irregular measurement intervals.
- The monitoring well in the USA is located in the town of Mansfield in the state of Connecticut and is screened in a confined bedrock aquifer. The aquifer consists of crystalline non-carbonated rock; predominantly metamorphic schist; and gneiss that is highly folded, with numerous fractures and joints. The surface elevation is approximately 157 m a.s.l., and the well screen is approximately 135 m below the land surface. The well site no. is 414831072173002; the head data were downloaded from <https://waterdata.usgs.gov> (last access: 1 July 2022) on 1 July 2022. The distance to the nearby river is approximately 1.5 km, with some small river

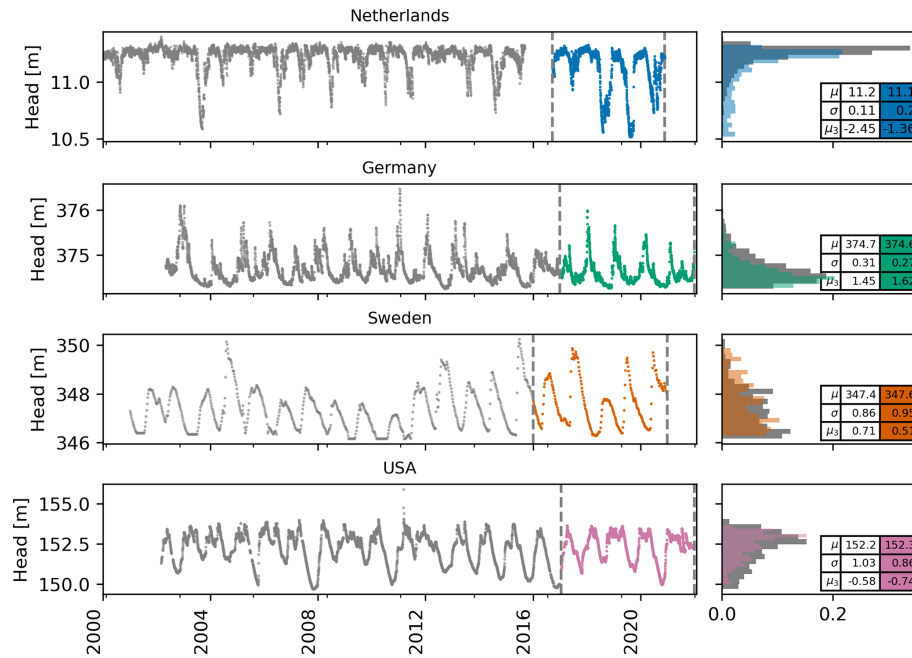


Figure 1. Hydraulic-head time series, their probability density distributions, and summary statistics (the mean μ , the standard deviation σ , and the skewness μ_3) for the calibration period (grey data) and the validation period (coloured data); heads in the validation period were not provided to the participants.

branches being even closer at around 500 m. The climate at this location is classified as continental, similarly to Germany. The average annual precipitation and potential evaporation fluxes are, however, much larger at 1344 and 956 mm per year, respectively.

Time series of several stresses were provided to model the heads. All the variables were provided as time series with daily values starting approximately 10 years before the first head measurement and extending 4 to 5 years (the length of the validation period) after the last head measurement. For the wells located in Europe, stresses were obtained from the E-OBS database (Cornes et al., 2018, v0.25.0e). The data provided for these three wells included nine daily variables: precipitation; mean, maximum, and minimum temperature; potential evaporation; mean sea level pressure; mean wind speed; mean relative humidity; and global radiation. For the well in the USA, only the precipitation, the potential evaporation (computed using the Hamon method; Hamon, 1961), the mean and maximum daily temperature, and the stage of a nearby river were provided; this was the only well where river stage data were provided. Summary statistics of the most common meteorological stresses (temperature, precipitation, and potential evaporation) are provided in Table 1 for reference and comparison.

2.3 Evaluation of modelling results

The aim of the modelling challenge was to simulate the heads for the calibration period and to predict the heads for the val-

idation period. Therefore, the model evaluation is focused on how well the models predicted the heads in each of these periods. The simulated head time series and the estimated prediction intervals are evaluated and compared using various performance metrics, as summarized in Table 2. All metrics are computed separately for the calibration and validation periods.

The simulated heads are evaluated using the Nash–Sutcliffe efficiency (NSE), a relative error metric, and the mean absolute error (MAE), an absolute error metric. In addition, it is evaluated how well the models simulate the lower and higher heads. The performance of the models in simulating low heads is measured using the MAE computed on the heads below the 0.2 quantile ($MAE_{0.2}$), while the performance in simulating high heads is evaluated using the MAE computed on the heads above the 0.8 quantile ($MAE_{0.8}$). The thresholds 0.2 and 0.8 are chosen based on a visual interpretation of the distribution of highs and lows, but, of course, this remains somewhat arbitrary. Analyses using other thresholds (0.05, 0.1, 0.9, and 0.95) showed that the results and conclusions about the models' performances in simulating the extremes do not change substantially with different thresholds (see also the Supplement).

All teams were also asked to provide 95 % prediction intervals for their simulations. The quality of these intervals is assessed by computing the prediction interval coverage probability (PICP). A PICP value of 0.95 means that 95 % of the observed values are within the 95 % prediction intervals. PICP values below 0.95 mean that the uncertainty is under-

Table 1. For each monitoring well: latitude (lat.), longitude (long.), climate, and average annual values for the common meteorological stresses of temperature (T), precipitation (P), and potential evaporation (ET_p).

Country	Lat.	Long.	Climate	T (°C)	P (mm yr ⁻¹)	ET_p (mm yr ⁻¹)
Netherlands	53.00	6.42	Cfb	9.9	876	559
Germany	48.92	11.35	Dfb	8.7	692	641
Sweden	68.36	18.82	Dfc	0.0	353	332
USA	41.81	-72.29	Dfb	8.9	1344	956

Table 2. The performance metrics used for model evaluation. N is the number of measurements in the measured head time series h_i ; \hat{h}_i is the modelled head; μ_h is the average measured head; $h_{q=0.2}$ and $h_{q=0.8}$ are the 0.2 and 0.8 quantiles of the measured head, respectively; and \hat{h}_i^L and \hat{h}_i^U are the lower and upper limits of the estimated prediction interval for measurement i , respectively.

Metric	Formula	Range
Nash–Sutcliffe efficiency (NSE)	$1 - \frac{\sum_{i=1}^N (h_i - \hat{h}_i)^2}{\sum_{i=1}^N (h_i - \mu_h)^2}$	$-\infty$ –1
Mean absolute error (MAE)	$\frac{1}{N} \sum_{i=1}^N h_i - \hat{h}_i $	0– ∞
Metric for low levels (MAE _{0.2})	$\frac{1}{N} \sum_{i=1}^N h_i - \hat{h}_i $ for $h_i < h_{q=0.2}$	0– ∞
Metric for high levels (MAE _{0.8})	$\frac{1}{N} \sum_{i=1}^N h_i - \hat{h}_i $ for $h_i > h_{q=0.8}$	0– ∞
Prediction interval coverage probability (PICP)	$\frac{1}{N} \sum_{i=1}^N a_i, a_i = \begin{cases} 1 & \text{if } h_i \in [\hat{h}_i^L, \hat{h}_i^U], \\ 0 & \text{otherwise} \end{cases}$	0–1

estimated; on the other hand, for PICP values above 0.95, the uncertainty is overestimated.

3 Submissions

A total of 17 teams from different institutes participated in the challenge. After an initial analysis of the results and consultation of the participants, it was decided to exclude the results of two teams from further analysis. The models of these two teams had performance levels worse than if the mean head was taken as the simulation. Table 3 provides an overview of the data of the remaining 15 participating groups. The geographical locations of participating groups are unevenly distributed, with two-thirds of the teams coming from continental Europe. This was expected as three of the four monitoring wells were located in Europe, and the main promotion of the challenge was at the EGU. A total of 12 teams modelled all four time series provided for the challenge, and three teams simulated only two (for unknown reasons).

All submissions were collected through the GitHub platform, where participating groups made pull requests to submit their results. The pull requests were manually checked before being merged. Many of the teams made sure that their analysis is reproducible by submitting not only the results and a description of the models but also the scripts and information on the computing environment used for the analysis.

In general, the submissions were of high quality, and the results were reproducible.

3.1 Model types

All teams used different models and software to simulate the hydraulic heads. The models were roughly categorized into three groups: lumped-parameter models, machine learning models, and deep learning models. None of the teams used a process-based or analytical model, which may be explained (as mentioned before) by the limited description of the subsurface conditions and the exact locations of the wells. Detailed referenced descriptions of the individual models and methods can be found in the Supplement of this paper. The files submitted by the participants, including detailed scripts and workflows for most models, can be found in a dedicated Zenodo repository (see the “Code and data availability” section). An overview of the methods and the most important differences are provided below.

3.1.1 Lumped-parameter models

Three of the teams used a type of lumped-parameter model to simulate the heads. All three models (HydroSight, Peterson and Western, 2014; Pastas, Collenteur et al., 2019; Gardenia, Thiéry, 2015) use reservoir models to compute groundwater recharge from precipitation and potential evaporation. This recharge flux is translated into groundwater levels using a response function (Pastas and HydroSight) or a routing rou-

Table 3. Groups participating in the groundwater modelling challenge, including the model they used, the type of model, and the wells that they simulated. ML refers to machine learning, and DL refers to deep learning. Affiliation numbers correspond to the numbers on the first page of this paper.

Team	Model	Affiliations	Type	NLD	GER	SWE	USA
da_collective	Pastas	6, 7	Lumped	✓	✓	✓	✓
gardenia	Gardenia	8	Lumped	✓	✓	✓	✓
HydroSight	HydroSight	9, 10, 11	Lumped	✓	✓	✓	✓
Janis	RF	12	ML	✓	✓	✓	✓
Mirkwood	RF	13	ML	✓	✓	✓	✓
MxNI	RF/RBF-SVM/MLP/P-SVM	15	ML	✓	✓	✓	✓
Selina_Yang	SVR	14	ML	✓	✓		
GEUS	LSTM	16	DL	✓	✓	✓	✓
LUHG	N-HiTS	17	DL	✓	✓	✓	✓
M2C_BRGM	BC-MODWT-DL	18, 19	DL	✓	✓	✓	✓
TUD	LSTM	20	DL	✓			✓
RouhaniEtAl	CNN	21, 22	DL	✓	✓	✓	✓
TUV	Transformer	23, 24	DL	✓	✓	✓	✓
haidro	LSTM	25	DL	✓	✓	✓	✓
uw	RNN	26	DL	✓	✓		

tine (Gardenia). Additional stresses can be added in a similar manner. These models are characterized by a small number of parameters (5 to 15) and short computation times.

Each team used different strategies for calibration. The parameters of the Pastas models were calibrated with PESTPP-IES and pyEMU (White et al., 2016). Parameters for the HydroSight models were calibrated using a shuffled complex algorithm (a global calibration scheme; Chu et al., 2011). Gardenia was the only model in the challenge that was calibrated manually by minimizing the NSE and through visual interpretation even though the developers recommend using Gardenia's automatic calibration procedure (Thiéry, 2024). All of these models used only precipitation and potential evaporation as explanatory variables, and some models used the temperature data (Sweden) and the river stage (USA) even though all three models have the ability to do both.

3.1.2 Machine learning models

Four teams used a supervised machine learning algorithm to model the heads: Janis, Mirkwood, Selina_Yang, and MxNI. The first two teams applied (ensembles of) random forest models applying the R packages tidymodels (Kuhn and Wickham, 2020) and ranger (Wright and Ziegler, 2017). Both teams used the root mean squared error (RMSE) as the objective function. A detailed description of the random forest approach from team Mirkwood can be found in Di Ciacca et al. (2023). Team Selina_Yang used a support vector regression (SVR) model from the Python package scikit-learn (Pedregosa et al., 2011) to simulate the heads and used the mean squared error (MSE) as the calibration target. Team MxNI applied an ensemble of random forests, multi-layer perceptron, and Radial Basis Function Support Vector Ma-

chine models in various configurations (Wright and Ziegler, 2017; Venables et al., 2002; Karatzoglou et al., 2004). The weights for each member in the ensemble were optimized using the RMSE as the objective function.

All of these models used most of the supplied data, plus additional time series compiled from the supplied data; such compiled time series are referred to as engineered features. The features were often lagged versions of the original variables or moving-window features (e.g. averages) to capture memory effects of the variables. Such engineered features can incorporate existing domain knowledge and thus provide the model with more relevant information, which can lead to better predictions and improved accuracy compared to leveraging the provided data directly.

3.1.3 Deep learning models

The majority of the teams, eight in total, applied a deep learning (DL) model to simulate the heads. Seven of them applied a model based on neural networks (e.g. convolutional neural networks (CNNs), recurrent neural network (RNN), or long short-term memory (LSTM)). Four teams (TUD, Haidro, GEUS, and UW) used a long short-term memory (LSTM) network (e.g. Hochreiter and Schmidhuber, 1997), where Haidro used a multi-timescale LSTM (MTS-LSTM) network. TUD used a sequence-to-sequence neural network model (Transformer, Vaswani et al., 2017), and RouhaniEtAl applied a convolutional neural network (CNN, based on Wunsch et al., 2022). Team M2c_BRGM applied a Boundary Corrected Maximal Overlap Wavelet Transform deep learning (BC-MODWT-DL) model based on (BI)LSTM and GRU models (Chidepudi et al., 2023). LUHG used a Neural Hierarchical Interpolation for Time Series Forecast-

ing model (N-HiTS, Challu et al., 2023), optimized using a Gaussian likelihood function. All other teams in this group used the mean squared error as the loss function to optimize the models. All these models simulate nonlinear relationships between the input data and the heads and used all the data provided for each well.

In contrast to the machine learning models, only three teams derived additional features from the provided input data (GEUS, LUHG, and Haidro). For example, team GEUS computed snow accumulation, to be used as an additional input variable. The reasons why other teams did not use feature engineering are not known; however, although deep learning methods can benefit from additional features in a similar way to machine learning models (see above), they are better at extracting features themselves during training. In addition, the inclusion of additional inputs increases the complexity (number of parameters) of a deep learning model, which can be counterproductive.

4 Results

4.1 Overall performance

The overall model performances were measured by the Nash–Sutcliffe efficiency (NSE) and the mean absolute error (MAE), which are presented in Figs. 2 and 3, respectively. Each column shows a different monitoring well, and each row represents a team. The lighter-coloured bars show the metric values for the calibration period, and the darker-coloured bars show the metric values for the validation period. The numbered circles denote the rank of each team per well in the validation period, and the star denotes the best model per well in the validation period (highest NSE is best). At the top, boxplots of the metric values of all teams are shown. All boxplots in this paper show the interquartile range, and whiskers indicate 1.5 times the interquartile range. For the NSE, the highest value is best (Fig. 2). For the MAE, the lowest value is best (Fig. 3). Note that the MAE is expected to be higher for wells where the range of the head data is larger (i.e. the MAE is expected to be larger for the well in Sweden than for the well in the Netherlands).

Most models generally showed reasonable performance, except for the well in Sweden, with an average NSE of 0.64 over all four wells in the validation period. Without the well in Sweden, the average NSE for the three remaining wells in the validation period is 0.72. This shows the general capability of the models to simulate the observed groundwater levels with the provided input data. Model performances generally decreased from the calibration to the validation period from an NSE of 0.80 to an NSE of 0.64 on average (for all four wells).

The results shown in Figs. 2 and 3 indicate that none of the models consistently outperformed all other models for all wells. Moreover, no models were consistently ranked (based on these two metrics) in the top five for all four wells. There

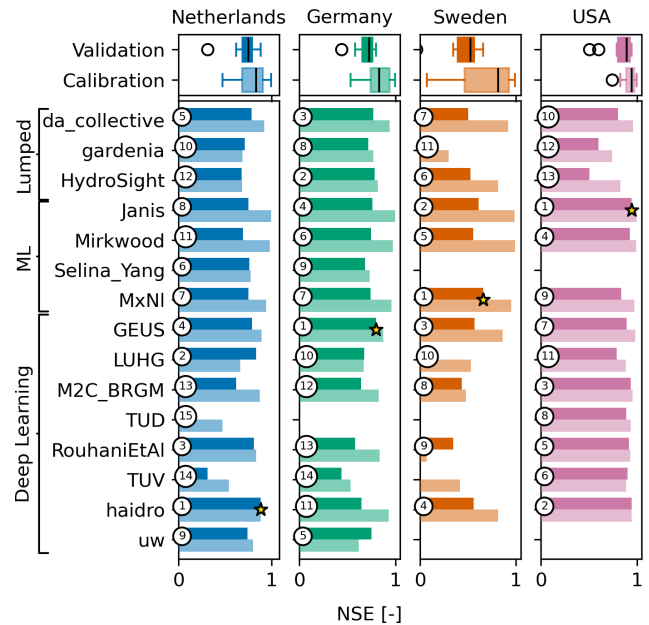


Figure 2. Bar plots of the Nash–Sutcliffe efficiency (NSE) for each of the wells (each column) and for each team (each row) for the calibration (lighter colour) and for the predicted validation period (darker colour). The teams are grouped together by their model type. The numbered circles denote the rank of the team for each well, and the star denotes the best model per well in the validation period (highest NSE is best). If no model was provided by a team, there is no rank for that well. Boxplots of the metric values over all teams are shown for each well at the top.

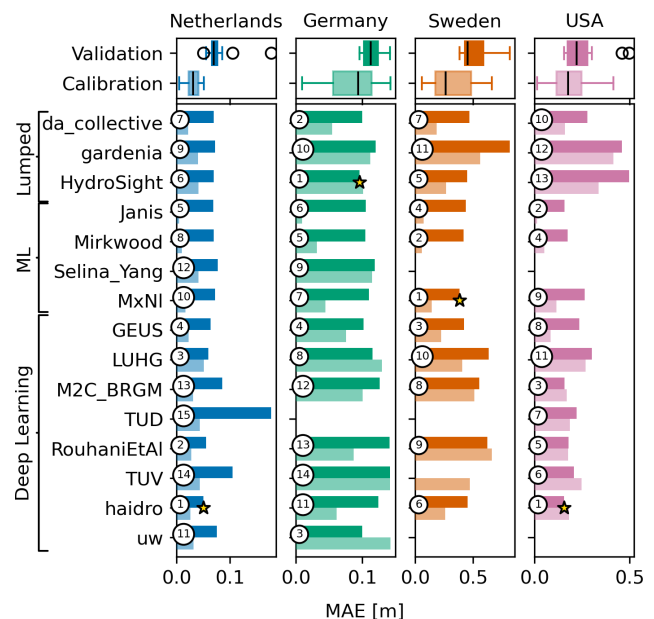


Figure 3. The same as for Fig. 2 but for the mean absolute error (MAE). Note that the lowest MAE is best.

is also not one model type (lumped, ML, or DL) that consistently outperforms the others. For the MAE metric, for example, the two best ranking models are deep learning models for the Netherlands, lumped-parameter models for Germany, and machine learning models for Sweden. The deep learning models, however, have the best models for two out of four wells, as measured by MAE and NSE. The different performance metrics measure different error metrics (relative vs. absolute) or focus on different parts of the head time series (low heads or high heads). The ranking of the models differs for each error metric, which highlights the importance of using multiple metrics. Although the best-performing model is indicated for each metric, it must be pointed out that the difference between the top-performing models is small for each metric.

The performance of the lumped-parameter models is substantially lower for the well in the USA. This is also the only well where river stage data were provided. Here, the relatively low model performances for HydroSight and Gardenia can probably be explained by the fact that river stage data were not used in these models, contrarily to all other teams. The Spearman correlation between the river stage and the head is $R = 0.78$, making the river stage a good predictor of the head for this well. It is noted, however, that including the river as a stress is possible in both HydroSight and Gardenia and would likely improve the results. The substantially lower performances may thus be considered to be the result of modelling choices rather than model deficiencies. Missing data and processes are also likely to be the reasons for the low model performance of the Gardenia model for the well in Sweden; i.e. it is the only model in the challenge that did not use temperature data, while Gardenia has an option to simulate the snow process. Temperature data for Sweden are important to account for the impact of snow processes on the heads.

The model fit is further illustrated by plots of the best model for each model type according to the NSE for each of the four wells (Fig. 4). The results show that the best models simulate the heads fairly accurately, except for the well in Sweden. For the wells in the Netherlands, Germany, and Sweden, substantial differences exist between the three best models despite the use of similar or the same input data.

4.2 Low and high groundwater levels

The performance of the models in simulating low and high groundwater levels (lows and highs) was measured using the mean absolute error (MAE) computed on the head measurements below the 0.2 quantile and above the 0.8 quantile. The results for the $MAE_{0.2}$ and $MAE_{0.8}$ for the validation period are shown in Fig. 5. Again, there is no model that consistently outperforms the others for all wells in simulating low heads or high heads (or both).

In general, the MAEs are higher in the direction of the skewness of the head distribution (see Fig. 1). For example,

the $MAE_{0.2}$ is higher than the $MAE_{0.8}$ values for the Netherlands and the USA, which are skewed to the lower head values (i.e. the distribution has a longer tail for the lower heads), while the $MAE_{0.8}$ is higher than the $MAE_{0.2}$ values for Germany and Sweden, which are skewed to the higher head values. For the data of the Netherlands in particular, where the heads are skewed due to capping near the drainage level, all models simulate the higher heads much better than the lower heads.

4.3 Comparison of uncertainty estimates

The teams were asked to provide uncertainty estimates in the form of 95 % prediction intervals for the head simulations (one team did not submit uncertainty estimates). It was tested what percentage of the measurements lay within the intervals using the PICP. Figure 6 shows bar plots of the PICP, where 0.95 is a perfect score. A lower value means that the prediction interval is too narrow, and a higher value means that the prediction interval is too wide. It is noted that none of the models had a PICP of 1.0, which would indicate that the estimated 95 % prediction interval is so wide that it includes all measurements. On the other hand, many teams severely underestimated the prediction intervals. Depending on the well, between 5 and 8 teams had a PICP of 0.5 or less, which means that at least 50 % of the observed heads lie outside the 95 % prediction interval.

Five teams, LUHG, GEUS, da_collective, HydroSight, and TUV, had reasonable to very good estimates of the prediction intervals at all sites. These teams represent both lumped-parameter models and deep learning models, which indicates that the quality of the uncertainty estimates is not related to the type of model but to the method of uncertainty estimation. For the machine learning models, only Selina_Yang provided good estimates of the prediction intervals, but this team also only supplied intervals for two sites. It is noted that some of the teams provided confidence intervals (indicated with a star * behind the team name in Fig. 6), which are narrower than prediction intervals.

4.4 Evaluation of effort

All participating groups were asked to self-report estimates of the time investment required to develop the models and to perform the calibration and uncertainty estimation. Figure 7 shows the time estimates, grouped into four categories: less than 1 h, 1 to 4 h, 4 to 8 h, and more than 8 h. The total time to develop and calibrate a single model ranged from less than 1 h to 19 h, averaging approximately 4 h per well. From the data shown in Fig. 7, it is clear that most models were developed and calibrated in less than 1 d. Some teams (at least Janis, Selina_Yang, TUD) spent most of the time developing an approach for a single site and then used the same approach and/or script for all the other sites so it was much faster for the other sites. As a general rule, it appears that teams that es-

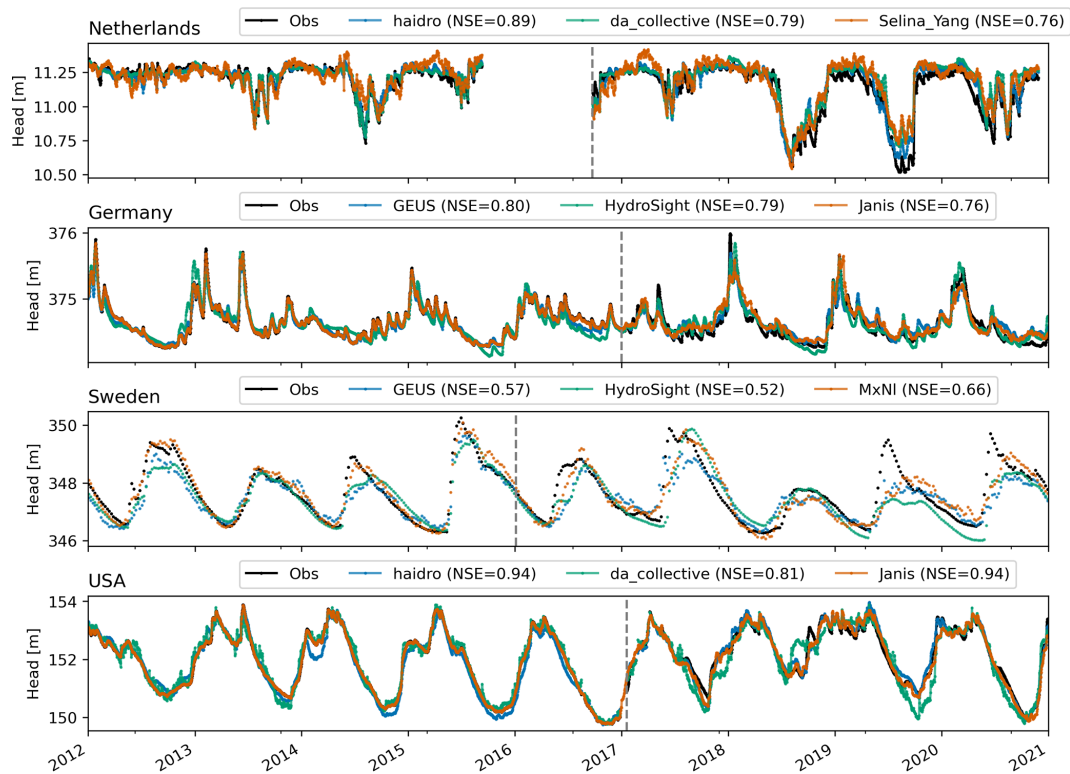


Figure 4. Observed and simulated head time series for the model with the highest NSE in the validation period (values shown in the legends) of each model type (blue line is for deep learning, the orange line is lumped-parameter models, and the green line is machine learning). The vertical dashed line shows the start of the validation period.

timated the uncertainty intervals more accurately (PICP near 0.95) had longer calibration times. While not surprising, this indicates that a significant time investment is required to obtain good uncertainty estimates.

A straightforward interpretation of the time investments is difficult. One reason for this is that the actual computational time depends on the computational resources that were used. The estimates should thus be interpreted as an indication. Furthermore, the applied models and software may be at different states of development and may have more options or only a few options to explore. Another less tractable reason is that the teams had varying familiarity with the used models: while some teams had previously used the model in one or multiple studies, other teams applied a model for the first time and started from scratch. Time investment may also be impacted by participants being at different stages in their careers, but no information to verify this was collected. These problems suggest that model complexity cannot be assessed from time investment and that other measures are needed to assess model complexity (e.g. Azmi et al., 2021; Weijs and Ruddell, 2020). Nonetheless, it can be concluded that the time investment required to develop and calibrate data-driven models is relatively short compared to more classical groundwater models.

5 Discussion and conclusions

Results were presented for the 2022 Groundwater Time Series Modelling Challenge. A total of 17 teams picked up the challenge and submitted results (2 of the 17 teams were excluded after initial assessment of the results). The challenge focused on the simulation of four head time series with relatively limited information regarding the subsurface (a fifth series was removed from the challenge as none of the teams were able to obtain an NSE above zero in the validation period). All monitoring wells are located in areas with temperate or continental climates where the environment is more energy-limited rather than water-limited, with relatively low inter-annual variability. Head time series were selected with (almost) regular time intervals so as to not exclude methods that cannot deal with irregular time series. The 15 analysed contributions were categorized into three general approaches: lumped-parameter modelling (three submissions), machine learning (four submissions), and deep learning (eight submissions). Performance was assessed using absolute and relative performance metrics for both the calibration and validation periods; the number of model parameters was not included in the performance metrics. The general dynamics of the measured hydraulic heads could be simulated reasonably well, with at least one model from each category.

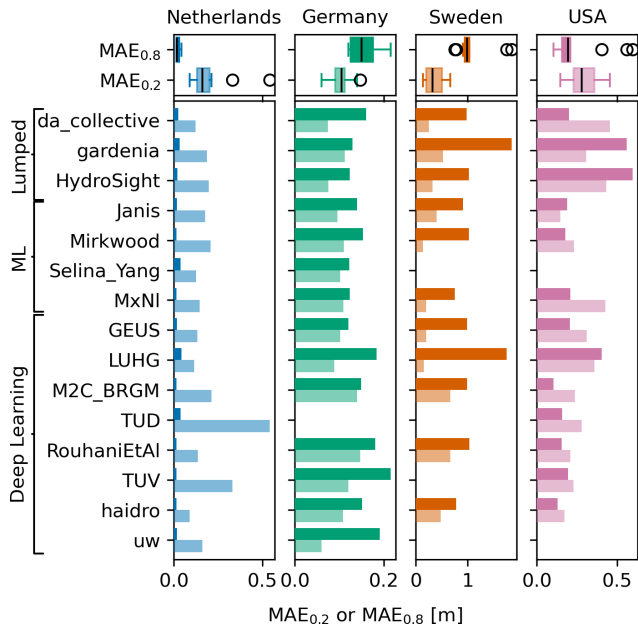


Figure 5. Bar plots of the MAE_{0.2} (lighter colour) and the MAE_{0.8} (darker colour) for the validation period (lower is better). Boxplots of the metric values are shown in the two rows at the top for comparison.

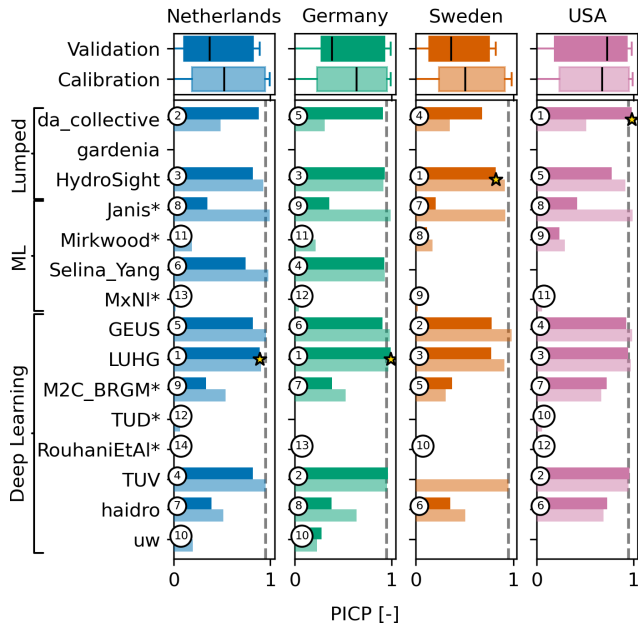


Figure 6. Bar plot of the PICP as a measure of the quality of the prediction intervals (0.95 is best, indicated by the vertical dashed line). The star in the bar plot indicates the best model. A star behind the team name indicates that the team provided confidence intervals instead of prediction intervals.

No clear relationship between the model type and hydrogeological setting was observed. The general performance de-

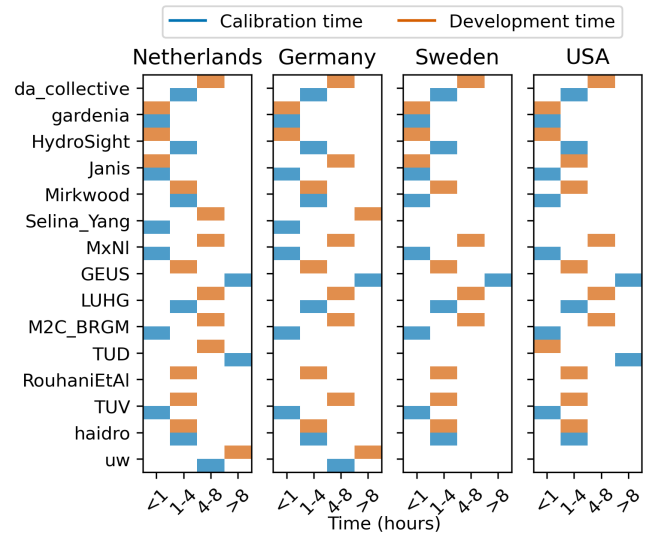


Figure 7. Estimated time of development (blue bars) and calibration (orange bars) in hours for each team.

creased slightly from the calibration to the validation period, as may be expected.

5.1 Learning from model comparisons

In general, the performance metrics for models that performed best in each category did not differ much. This means that each of the three major methods can, in principle, be applied to obtain reasonable results in the current challenge. Within the deep learning category, substantial variations were observed between the models: some were good while others were not (e.g. Fig. 3). Such variation was not observed in the other two categories, but those had substantially fewer submissions. This may reflect on the difficulty (some would say the art) of applying deep learning methods but may also reflect on the experience of the different teams with the application of these methods; experienced teams generally obtain better results (e.g. Holländer et al., 2009; Melsen, 2022). The materials submitted by the teams may serve as a resource for others to further investigate and learn why these differences exist and what strategies work best.

The lumped-parameter models only applied stresses that are also applied in “traditional” groundwater models: rainfall, potential evaporation, and river stages (and some used temperature for simulating snow processes) in combination with response functions with only a few parameters. If model performance is better when a stress is included, this does not necessarily mean that there is a causal relationship as the stress can be a proxy of another stress that behaves in a similar manner. It is highly likely, however, that, if a stress is needed to obtain good results in a lumped-parameter model and if the stress makes physical sense, a traditional groundwater model also needs this stress. The AI models generally used more of the provided (meteorological) data than the

lumped-parameter models, including engineered data such as multi-day averages. The AI models generally use many more parameters than the lumped-parameter models, which may result in overfitting when applied incorrectly. No overfitting was observed, however, as performance in the validation period was generally somewhat lower than in the calibration period, which is evidence of the aptitude of the AI teams. All models can potentially benefit from an improved estimate of the potential evaporation, which was estimated for all sites using a simple temperature-based method.

The performance increase of AI models was limited as compared to lumped-parameter models for most wells. This means that the lumped-parameter models, which are specifically developed to simulate head variations, reproduce the fundamental behaviour of the groundwater flow systems included in the challenge reasonably well. Because some of the AI models learned more from the provided data (i.e. achieved higher performance), it is expected that small performance gains may be obtained for the lumped-parameter models by improving some of the process representations (e.g. snowmelt, evaporation) in the models.

For the well in the USA, the AI models performed substantially better than the lumped-parameter models, which may be attributed to the fact that river stage data were not used in two out of three lumped-parameter models. The representation of the river stage in the AI models leads to better results compared to the one lumped-parameter model that used the river stage (*da_collective*), although it is noted that this team simulated the response to river stage variations as immediate rather than using a response function to transform the stage to a groundwater response. In general, artificial intelligence approaches have more flexibility in the use and design of input data than lumped-parameter models, allowing many more types and sources of data, which may also be transformed and combined through feature engineering. Such transformations of input data, which can be interpreted as simple response functions that are further transformed by the AI model, have the primary aim of delivering information to the AI model that may lead to improved predictions. Such transformed input data increase flexibility and improve the fit, but they are often not straightforward to interpret for hydrogeological system understanding. Therefore, AI models are generally characterized as black-box models. However, recent studies have shown that methods from the field of explainable AI (XAI) can be leveraged to gain hydrogeological system understanding from trained AI models (e.g. Wunsch et al., 2024; Haaf et al., 2023; Jung et al., 2024). Lumped-parameter models, on the other hand, rely on predefined (simplified) response functions that shed light on the mechanistic functioning of the hydrogeological system. As such, lumped-parameter models may be used to unravel and quantify the effect of different stresses on the groundwater level over time, e.g. the effect of variations in rainfall vs. the effect of variations in river stage.

A common concern about machine and deep learning models is that they cannot accurately simulate hydrological extremes or extend predictions beyond observed conditions. Other model types (e.g. models constrained by empirical relationships) are sometimes thought to perform better in this regard. The results of the current challenge contradict this and indicate that no substantial differences exist between artificial intelligence models on the one hand and lumped-parameter models on the other hand, provided both are applied appropriately. This is in line with other analyses testing this concern for streamflow modelling (e.g. Frame et al., 2022). This was especially interesting for the Netherlands, where the validation period was much drier than the calibration period, resulting in much lower heads than in the calibration period (see Fig. 4); yet, the best deep learning model performed better than the best lumped-parameter model in the validation period.

5.2 The impact of modelling choices on head simulations

The simulated heads are the combined result of the applied method and the choices made by the modeller(s). Many choices needed to be made by the modeller for each method, all affecting the final model outcome. The effect of (human) choices on the outcome of analyses is a known issue in the Earth sciences (see, for example, Menard et al., 2021; Melsen, 2022) and other sciences (see, for example, Silberzahn et al., 2018). It is difficult to distinguish between the effect of actual model deficiencies (i.e. a model's inherent inability to simulate certain hydrological behaviour) and model choices (e.g. inclusion of a stress or the choice of the calibration procedure) due to the setup of this challenge. The effect of modelling choices in this challenge is apparent from the significant performance difference between teams that applied deep learning methods (Figs. 2 and 3). Another good example is the effect of modelling choices made for the *Gardenia* model. During the public review process of this paper, the *Gardenia* developers pointed out that substantially better results could be obtained with *Gardenia* by choosing different model structures (e.g. including snow in Sweden and river stages in the USA) and using automatic calibration (Thiéry, 2024).

It is emphasized, however, that the results clearly show that the current setup and choices led to good results for most models and that even better results could have been obtained for many models if other modelling choices had been made. This highlights how difficult model inter-comparisons are and how important the choices by the modeller are for the final result.

5.3 Recommendations for future challenges

The organization of a modelling challenge is a challenge in itself. Five lessons learned from organizing this challenge are

listed below, which are envisioned to be helpful recommendations for organizers of future challenges.

1. Clearly state the objective of the challenge and the methods of performance evaluation. The objective for this challenge was to predict the heads during both the calibration and validation periods, i.e. all aspects of the time series. The exact metrics used to evaluate the performance were not determined in advance. It is conceivable that teams would have reached different outcomes had they known the exact performance criteria beforehand. Further investigation into the effect of varying performance criteria during benchmarking is warranted, given that the paper demonstrated the significant influence of metrics on the final results.
2. Be as explicit as possible when describing the deliverables. This challenge, for example, initially asked for uncertainty intervals although prediction intervals were meant. As a result, some teams submitted confidence intervals, which could have been prevented with more explicit descriptions. Furthermore, the challenge did not explicitly ask for a description of the calibration method (global, local) or for a description of the method to estimate the uncertainty, which would have been interesting information.
3. Provide a clear structure for the submission of information on data pre-processing. For example, teams applying AI models widely employed different engineered input data. Their design likely has an important influence on model performance in combination with model architecture. A clear structure for submitting this model information would have made the evaluation of the effect of engineered input data more tractable across the different submissions and data sets.
4. Evaluate the response of the models to a few scenarios of future stresses. For example, for this challenge, it would have been interesting to supply a few scenarios with a significant rainfall event or drought period in the validation period. A comparison of model results for such scenarios is pertinent information on how models behave, especially when performances are similar in the calibration and validation periods.
5. Automate the validation of the submitted materials to save time and prevent errors. Continuous integration can possibly help to check new submissions, like unit tests for software development, especially when handled through pull requests on code-sharing platforms.

5.4 Concluding remarks

The 2022 Groundwater Time Series Modelling Challenge was a successful challenge, attracting many contributions from the groundwater modelling community. This allowed

us to compare a large number of different models, many of which can be successfully used to simulate head time series. The materials provided by all the teams participating in this challenge may be used to further explore different methods and to learn from each other (see the “Code and data availability” section).

Several of the teams that submitted results commented that, although it took considerable effort to obtain good results and uncertainty estimates, the challenge did not explore the full potential of their model. It is emphasized that it is not possible to contribute below-average performance to either model deficiencies or model choices due to the setup of this challenge. Modelling choices clearly affected the model results for this challenge (Thiéry, 2024) as they did for previous challenges (Holländer et al., 2009; Menard et al., 2021). Some of the model choices that had a significant impact on the model results include the choice of stresses (temperature or river stage), calibration method, response function, and engineered features. In particular, the variation in the performance of the AI models highlights the importance of modelling choices. It is concluded that the setup of data-driven models takes relatively little time (i.e. hours), but getting good results still strongly depends on the choices made by the modeller.

This challenge investigates the performance of data-driven models for a small subset of conditions. New challenges may be organized for different climate zones with more inter-annual variations (e.g. longer dry periods or more arid climates), for time series with significant gaps or missing data, or for different purposes in groundwater modelling (e.g. drawdown estimation, recharge estimation), where other types of models (i.e. process-based models) are more commonly applied. One such challenge is already being organized to spatially predict nitrate concentrations (Nölscher et al., 2024).

Code and data availability. All data and code necessary to reproduce the results and figures shown in this paper are available from the Zenodo repository: <https://doi.org/10.5281/zenodo.10438290> (Collenteur et al., 2024). There, you will also find all the materials submitted by the teams to reproduce the modelling results.

Supplement. The supplement related to this article is available online at: <https://doi.org/10.5194/hess-28-5193-2024-supplement>.

Author contributions. The organizer team, consisting of the first five authors, set up the challenge. JS collected data for the well in the USA. All the other authors submitted the modelling results. The formal evaluation of the results was performed by RAC. RAC, EH, and MB wrote the paper, with comments and edits from TL, AW, and all the other authors. Co-authorship does not necessarily mean that all the authors agree with all the statements made in this paper.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. The organizers thank all the participating teams for joining the challenge. We thank the reviewers for their constructive comments that helped to improve the paper and the presentation of the results of this challenge.

Financial support. The work of team RouhaniEtAl was supported by OurMED PRIMA Program project funded by the European Union's Horizon 2020 research and innovation under grant agreement no. 2222. The contribution from team "uw" has been supported by the Canada First Research Excellence Fund provided to the Global Water Futures (GWF) Project.

Review statement. This paper was edited by Alberto Guadagnini and reviewed by four anonymous referees.

References

- Addor, N. and Melsen, L. A.: Legacy, Rather Than Adequacy, Drives the Selection of Hydrological Models, *Water Resour. Res.*, 55, 378–390, <https://doi.org/10.1029/2018WR022958>, 2019.
- Azmi, E., Ehret, U., Weijis, S. V., Ruddell, B. L., and Perdigo, R. A. P.: Technical note: “Bit by bit”: a practical and general approach for evaluating model computational complexity vs. model performance, *Hydrol. Earth Syst. Sci.*, 25, 1103–1115, <https://doi.org/10.5194/hess-25-1103-2021>, 2021.
- Bakker, M. and Schaars, F.: Solving Groundwater Flow Problems with Time Series Analysis: You May Not Even Need Another Model, *Groundwater*, 57, 826–833, <https://doi.org/10.1111/gwat.12927>, 2019.
- Challu, C., Olivares, K. G., Oreshkin, B. N., Garza Ramirez, F., Mergenthaler Canseco, M., and Dubrawski, A.: NHITS: Neural Hierarchical Interpolation for Time Series Forecasting. in: Proceedings of the AAAI Conference on Artificial Intelligence, 37th AAAI Conference on Artificial Intelligence, Washington DC, USA, 7–14 February 2023, 6989–6997, <https://doi.org/10.1609/aaai.v37i6.25854>, 2023
- Chidepudi, S. K. R., Massei, N., Jardani, A., Henriot, A., Allier, D., and Baulon, L.: A wavelet-assisted deep learning approach for simulating groundwater levels affected by low-frequency variability, *Sci. Total Environ.*, 865, 161035, <https://doi.org/10.1016/j.scitotenv.2022.161035>, 2023.
- Chu, W., Gao, X., and Sorooshian, S.: A new evolutionary search strategy for global optimization of high-dimensional problems, *Inform. Sciences*, 181, 4909–4927, 2011.
- Collenteur, R. A., Bakker, M., Caljé, R., Klop, S. A., and Schaars, F.: Pastas: Open Source Software for the Analysis of Groundwater Time Series, *Groundwater*, 57, 877–885, <https://doi.org/10.1111/gwat.12925>, 2019.
- Collenteur, R., Bakker, M., Haaf, E., Wunsch, A., and Tanja, L.: Data and Code from the 2022 Groundwater time series Modeling Challenge, Zenodo [code and data set], <https://doi.org/10.5281/zenodo.10438290>, 2024.
- Cornes, R. C., van der Schrier, G., van den Besselaar, E. J. M., and Jones, P. D.: An Ensemble Version of the E-OBS Temperature and Precipitation Data Sets, *J. Geophys. Res.- Atmos.*, 123, 9391–9409, <https://doi.org/10.1029/2017JD028200>, 2018.
- Di Ciacca, A., Wilson, S., Kang, J., and Wöhling, T.: Deriving transmission losses in ephemeral rivers using satellite imagery and machine learning, *Hydrol. Earth Syst. Sci.*, 27, 703–722, <https://doi.org/10.5194/hess-27-703-2023>, 2023.
- Frame, J. M., Kratzert, F., Klotz, D., Gauch, M., Shalev, G., Gilon, O., Qualls, L. M., Gupta, H. V., and Nearing, G. S.: Deep learning rainfall–runoff predictions of extreme events, *Hydrol. Earth Syst. Sci.*, 26, 3377–3392, <https://doi.org/10.5194/hess-26-3377-2022>, 2022.
- Freyberg, D. L.: An exercise in ground-water model calibration and prediction, *Groundwater*, 26, 350–360, 1988.
- Haaf, E., Collenteur, R., Liesch, T., and Bakker, M.: Presenting the Groundwater Time Series Modeling Challenge, EGU General Assembly 2022, Vienna, Austria, 23–27 May 2022, EGU22-12580, <https://doi.org/10.5194/egusphere-egu22-12580>, 2022.
- Haaf, E., Giese, M., Reimann, T., and Barthel, R.: Data-Driven Estimation of Groundwater Level Time-Series at Unmonitored Sites Using Comparative Regional Analysis, *Water Resour. Res.*, 59, e2022WR033470, <https://doi.org/10.1029/2022WR033470>, 2023.
- Hamon, W. R.: Estimating potential evapotranspiration, *J. Hydr. Eng. Div.-ASCE*, 87, 107–120, 1961.
- Hochreiter, S. and Schmidhuber, J.: Long Short-Term Memory, *Neural Comput.*, 9, 1735–1780, <https://doi.org/10.1162/neco.1997.9.8.1735>, 1997.
- Holländer, H. M., Blume, T., Bormann, H., Buytaert, W., Chirico, G. B., Exbrayat, J.-F., Gustafsson, D., Hölzel, H., Kraft, P., Stamm, C., Stoll, S., Blöschl, G., and Flühler, H.: Comparative predictions of discharge from an artificial catchment (Chicken Creek) using sparse data, *Hydrol. Earth Syst. Sci.*, 13, 2069–2094, <https://doi.org/10.5194/hess-13-2069-2009>, 2009.
- Jeannin, P.-Y., Artigue, G., Butscher, C., Chang, Y., Charlier, J.-B., Duran, L., Gill, L., Hartmann, A., Johannet, A., Jourde, H., Kavousi, A., Liesch, T., Liu, Y., Lüthi, M., Malard, A., Mazzilli, N., Pardo-Igúzquiza, E., Thiéry, D., Reimann, T., Schuler, P., Wöhling, T., and Wunsch, A.: Karst modelling challenge 1: Results of hydrological modelling, *J. Hydrol.*, 600, 126508, <https://doi.org/10.1016/j.jhydrol.2021.126508>, 2021.
- Jung, H., Saynisch-Wagner, J., and Schulz, S.: Can explainable AI Offer a New Perspective for Groundwater Recharge Estimation? – Global-Scale Modeling Using Neural Network, *Water Resour. Res.*, 60, e2023WR036360, <https://doi.org/10.1029/2023WR036360>, 2024.

- Karatzoglou, A., Smola, A., Hornik, K., and Zeileis, A.: kernlab – An S4 Package for Kernel Methods in R, *J. Stat. Softw.*, 11, 1–120, <https://doi.org/10.18637/jss.v011.i09>, 2004.
- Kollet, S., Sulis, M., Maxwell, R. M., Paniconi, C., Putti, M., Bertoldi, G., Coon, E. T., Cordano, E., Endrizzi, S., Kikinzon, E., Mouche, E., Mügler, C., Park, Y.-J., Refsgaard, J. C., Stisen, S., and Sudicky, E.: The integrated hydrologic model intercomparison project, IH-MIP2: A second set of benchmark results to diagnose integrated hydrology and feedbacks, *Water Resour. Res.*, 53, 867–890, <https://doi.org/10.1002/2016WR019191>, 2017.
- Kratzert, F., Klotz, D., Herrnegger, M., Sampson, A. K., Hochreiter, S., and Nearing, G. S.: Toward Improved Predictions in Ungauged Basins: Exploiting the Power of Machine Learning, *Water Resour. Res.*, 55, 11344–11354, <https://doi.org/10.1029/2019WR026065>, 2019.
- Kuhn, M. and Wickham, H.: Tidymodels: a collection of packages for modeling and machine learning using tidyverse principles, <https://www.tidymodels.org> (last access: 25 November 2024), 2020.
- Melsen, L. A.: It Takes a Village to Run a Model – The Social Practices of Hydrological Modeling, *Water Resour. Res.*, 58, e2021WR030600, <https://doi.org/10.1029/2021WR030600>, 2022.
- Menard, C. B., Essery, R., Krinner, G., Arduini, G., Bartlett, P., Boone, A., Brutel-Vuilmet, C., Burke, E., Cuntz, M., Dai, Y., Decharme, B., Dutra, E., Fang, X., Fierz, C., Gusev, Y., Hagemann, S., Haverd, V., Kim, H., Lafaysse, M., Marke, T., Nasonova, O., Nitta, T., Niwano, M., Pomeroy, J., Schädler, G., Semenov, V. A., Smirnova, T., Strasser, U., Swenson, S., Turkov, D., Wever, N., and Yuan, H.: Scientific and Human Errors in a Snow Model Intercomparison, *B. Am. Meteorol. Soc.*, 102, E61–E79, <https://doi.org/10.1175/BAMS-D-19-0329.1>, 2021.
- Nolte, A., Haaf, E., Heudorfer, B., Bender, S., and Hartmann, J.: Disentangling coastal groundwater level dynamics in a global dataset, *Hydrol. Earth Syst. Sci.*, 28, 1215–1249, <https://doi.org/10.5194/hess-28-1215-2024>, 2024.
- Nölscher, M., Ohmer, M., Haaf, E., and Liesch, T.: Announcing the Groundwater Spatial Modeling Challenge, EGU General Assembly 2024, Vienna, Austria, 14–19 Apr 2024, EGU24-10386, <https://doi.org/10.5194/egusphere-egu24-10386>, 2024.
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., and Duchesnay, E.: Scikit-learn: Machine Learning in Python, *J. Mach. Learn. Res.*, 12, 2825–2830, 2011.
- Peterson, T. J. and Western, A. W.: Nonlinear time-series modeling of unconfined groundwater head, *Water Resour. Res.*, 50, 8330–8355, <https://doi.org/10.1002/2013WR014800>, 2014.
- Sahoo, S. and Jha, M. K.: Groundwater-level prediction using multiple linear regression and artificial neural network techniques: a comparative assessment, *Hydrogeol. J.*, 21, 1865–1887, <https://doi.org/10.1007/s10040-013-1029-5>, 2013.
- Shapiro, A. M. and Day-Lewis, F. D.: Reframing groundwater hydrology as a data-driven science, *Groundwater*, 60, 455–456, <https://doi.org/10.1111/gwat.13195>, 2022.
- Shapoori, V., Peterson, T., Western, A., and Costelloe, J.: Decomposing groundwater head variations into meteorological and pumping components: a synthetic study, *Hydrogeol. J.*, 23, 1431–1448, <https://doi.org/10.1007/s10040-015-1269-7>, 2015.
- Silberzahn, R., Uhlmann, E. L., Martin, D. P., Anselmi, P., Aust, F., Awtrey, E., Bahnk, S., Bai, F., Bannard, C., Bonnier, E., Carlsson, R., Cheung, F., Christensen, G., Clay, R., Craig, M. A., Rosa, A. D., Dam, L., Evans, M. H., Cervantes, I. F., Fong, N., Gamez-Djokic, M., Glenz, A., Gordon-McKeon, S., Heaton, T. J., Hederos, K., Heene, M., Mohr, A. J. H., Högden, F., Hui, K., Johannesson, M., Kalodimos, J., Kaszubowski, E., Kennedy, D. M., Lei, R., Lindsay, T. A., Liverani, S., Madan, C. R., Molden, D., Molleman, E., Morey, R. D., Mulder, L. B., Nijsstad, B. R., Pope, N. G., Pope, B., Prenoveau, J. M., Rink, F., Robusto, E., Roderique, H., Sandberg, A., Schlüter, E., Schönbrodt, F. D., Sherman, M. F., Sommer, S. A., Sotak, K., Spain, S., Spörlein, C., Stafford, T., Stefanutti, L., Tauber, S., Ullrich, J., Vianello, M., Wagenmakers, E.-J., Witkowiak, M., Yoon, S., and Nosek, B. A.: Many Analysts, One Data Set: Making Transparent How Variations in Analytic Choices Affect Results, *Advances in Methods and Practices in Psychological Science*, 1, 337–356, <https://doi.org/10.1177/2515245917747646>, 2018.
- Thiéry, D.: Validation du code de calcul GARDÉNIA par modélisations physiques comparatives, Brgm/Rp-64500-Fr, 28, <https://www.brgm.fr/sites/default/files/documents/2020-11/logiciel-gardenia-validation-rp-64500-fr.pdf> (last access: 25 November 2024), 2015.
- Thiéry, D.: Community Comment 1, Comment on hess-2024-111 especially on modelisations with Gardenia computer code, <https://doi.org/10.5194/hess-2024-111-CC1>, 2024.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L. U., and Polosukhin, I.: Attention is All you Need, in: *Advances in Neural Information Processing Systems*, edited by: Guyon, I., Luxburg, U. V., Bengio, S., Wallach, H., Fergus, R., Vishwanathan, S., and Garnett, R., vol. 30, Curran Associates, Inc., Long Beach, California, USA, https://proceedings.neurips.cc/paper_files/paper/2017/file/3f5ee243547dee91fbd053c1c4a845aa-Paper.pdf (last access: 25 November 2024), 2017.
- Venables, W. N., Ripley, B. D., and Venables, W. N.: *Modern applied statistics with S, Statistics and computing*, Springer, New York, 4th edn., ISBN 9780387954578, 2002.
- Vonk, M. A., Collenteur, R. A., Panday, S., Schaafs, F., and Bakker, M.: Time Series Analysis of Nonlinear Head Dynamics Using Synthetic Data Generated with a Variably Saturated Model, *Groundwater*, 62, 748–760, <https://doi.org/10.1111/gwat.13403>, 2024.
- Weijs, S. V. and Ruddell, B. L.: Debates: Does Information Theory Provide a New Paradigm for Earth Science? Sharper Predictions Using Occam’s Digital Razor, *Water Resour. Res.*, 56, e2019WR026471, <https://doi.org/10.1029/2019WR026471>, 2020.
- White, J. T., Fienen, M. N., and Doherty, J. E.: A python framework for environmental model uncertainty analysis, *Environ. Modell. Softw.*, 85, 217–228, <https://doi.org/10.1016/j.envsoft.2016.08.017>, 2016.
- Wright, M. N. and Ziegler, A.: ranger: A Fast Implementation of Random Forests for High Dimensional Data in C++ and R, *J. Stat. Softw.*, 77, 1–17, <https://doi.org/10.18637/jss.v077.i01>, 2017.
- Wunsch, A., Liesch, T., and Broda, S.: Groundwater level forecasting with artificial neural networks: a comparison of long short-term memory (LSTM), convolutional neural networks

- (CNNs), and non-linear autoregressive networks with exogenous input (NARX), *Hydrol. Earth Syst. Sci.*, 25, 1671–1687, <https://doi.org/10.5194/hess-25-1671-2021>, 2021.
- Wunsch, A., Liesch, T., and Broda, S.: Deep learning shows declining groundwater levels in Germany until 2100 due to climate change, *Nat. Commun.*, 13, 1221, <https://doi.org/10.1038/s41467-022-28770-2>, 2022.
- Wunsch, A., Liesch, T., and Goldscheider, N.: Towards understanding the influence of seasons on low-groundwater periods based on explainable machine learning, *Hydrol. Earth Syst. Sci.*, 28, 2167–2178, <https://doi.org/10.5194/hess-28-2167-2024>, 2024.
- Zarafshan, P., Etezadi, H., Javadi, S., Roozbahani, A., Hashemy, S. M., and Zarafshan, P.: Comparison of machine learning models for predicting groundwater level, case study: Najafabad region, *Acta Geophys.*, 71, 1817–1830, <https://doi.org/10.1007/s11600-022-00948-8>, 2023.