



CHALMERS
UNIVERSITY OF TECHNOLOGY

Transverse optical gradient force in untethered rotating metaspINNERS

Downloaded from: <https://research.chalmers.se>, 2025-03-19 00:46 UTC

Citation for the original published paper (version of record):

Engay, E., Shanei, M., Mylnikov, V. et al (2025). Transverse optical gradient force in untethered rotating metaspINNERS. *Light: Science and Applications*, 14(1).
<http://dx.doi.org/10.1038/s41377-024-01720-x>

N.B. When citing this work, cite the original published paper.

ARTICLE

Open Access

Transverse optical gradient force in untethered rotating metaspinnners

Einstom Engay¹, Mahdi Shanei¹, Vasilii Mylnikov¹, Gan Wang², Peter Johansson³, Giovanni Volpe² and Mikael Käll¹✉

Abstract

Nanostructured dielectric metasurfaces offer unprecedented opportunities to control light-matter momentum exchange, and thereby the forces and torques that light can exert on matter. Here we introduce optical metasurfaces as components of ultracompact untethered microscopic *metaspinnners* capable of efficient light-induced rotation in a liquid environment. Illuminated by weakly focused light, a metaspinner generates torque via photon recoil through the metasurfaces' ability to bend light towards high angles despite their sub-wavelength thickness, thereby creating orbital angular momentum. We find that a metaspinner is subject to an anomalous transverse lateral optical gradient force that acts in concert with the classical gradient force. Consequently, when two or more metaspinnners are trapped together in a laser beam, they collectively orbit the optical axis in the opposite direction to their spinning motion, in stark contrast to rotors coupled through hydrodynamic or mechanical interactions. The metaspinnners delineated herein not only serve to illustrate the vast possibilities of utilizing optical metasurfaces for fundamental exploration of optical torques, but they also represent potential building-blocks of artificial active matter systems, light-driven micromachinery, and general-purpose optomechanical devices.

Introduction

Micro and nanostructures amenable to non-contact manipulation using external driving fields receive increasing attention across the natural sciences as a consequence of the possibility to generate novel fundamental understandings of mesoscopic phenomena^{1,2} and the possibility for novel applications within areas such as biomedicine^{3–5}, material delivery⁶, and micro/nano-mechanical systems^{7–9}. For example, remotely actuated microstructures have been used to emulate the behavior of biological microorganisms^{10,11} while synthetic microstructures operated as untethered micromechanical tools have been explored as micropumps¹², microgrippers^{13,14}, and hydrodynamic propulsion systems^{15,16}.

Among the various field-actuation mechanisms available, including magnetic^{1,13}, electric^{8,17,18}, and acoustic¹⁹,

microparticle manipulation based on optical forces is particularly appealing due to the versatility, maturity and widespread availability of sophisticated optical microscopes and laser systems. Optical tweezers, which are based on conservation of linear momentum in the light-matter interaction, remain the prime example in this category^{20,21}. However, there is also the possibility to optically rotate particles, in this case based on conservation of angular momentum^{22,23}. This phenomenon was long seen as a mere scientific curiosity but developments since the mid 1990's²⁴ have demonstrated that optical rotation is a powerful tool for fundamental studies as well as applications^{25–28}. Consequently, significant research efforts have been devoted to development of micro- and nanostructures amenable to efficient optical rotation^{29–33}.

A light beam exerts torque on an object if the object changes the spin angular momentum (SAM) and/or the orbital angular momentum (OAM) of the beam, as determined by its polarization properties and azimuthal distribution of linear momentum, respectively^{34–36}. Examples of objects designed to be efficiently rotated through SAM transfer include vaterite microspheres²⁹

Correspondence: Mikael Käll (mikael.kall@chalmers.se)

¹Department of Physics, Chalmers University of Technology, 412 96 Gothenburg, Sweden

²Department of Physics, University of Gothenburg, 412 96 Gothenburg, Sweden

Full list of author information is available at the end of the article

These authors contributed equally: Einstom Engay, Mahdi Shanei

© The Author(s) 2025



Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

and plasmonic nanorods³² whereas efficient OAM transfer is more difficult to achieve since the object needs to be engineered to deflect light in specific directions^{37–39}. A sophisticated example of the latter is the “optical reaction micro-turbine”, designed to redirect an incident focused laser beam via a bundle of twisted light guides⁴⁰.

Recently, ultrathin microparticles supporting nanostructures designed to generate optical forces have emerged as a promising concept for realizing versatile optical manipulation schemes^{41–43}. High-index dielectric metasurfaces are particularly attractive in this context because of the possibility to modulate the amplitude, phase, and polarization of transmitted and reflected light with unprecedented control and flexibility in an ultrathin and low-drag format^{42,44,45}. Furthermore, the possibility to produce thousands of individual metastructures in a single lithographic process, and the possibility to activate these using essentially unfocused and unpolarized light, open new avenues of applications in optically driven micromachinery and for the development of various kinds of microrobotic and microfluidic applications.


Here we demonstrate a novel approach in constructing untethered and freely moving microrotors based on

optical metasurfaces embedded in transparent host particles. Each “metaspinner” contains a pair of metagratings that deflect light in opposite directions via a “lever arm”, thereby creating OAM that allows the particles to be efficiently rotated under loosely focused illumination. We first analyze the dynamics of individual metaspinner; then we study the behavior of multiple interacting particles, which reveals a counterintuitive collective orbital motion in the opposite direction to the spinning motion. This anomalous behavior originates in a transverse lateral gradient force that dominates hydrodynamic and mechanical interactions. We finally discuss possible further developments and potential applications of the results described herein.

Results

Metaspinner concept and design

The basic idea behind the metaspinner is schematically illustrated in Fig. 1a: A single metasurface able to deflect light incident normal to its surface experiences a reaction force due to conservation of linear momentum. The in-plane component of this photon-recoil force, F_{xy} , is determined by the deflection angle θ , the deflection

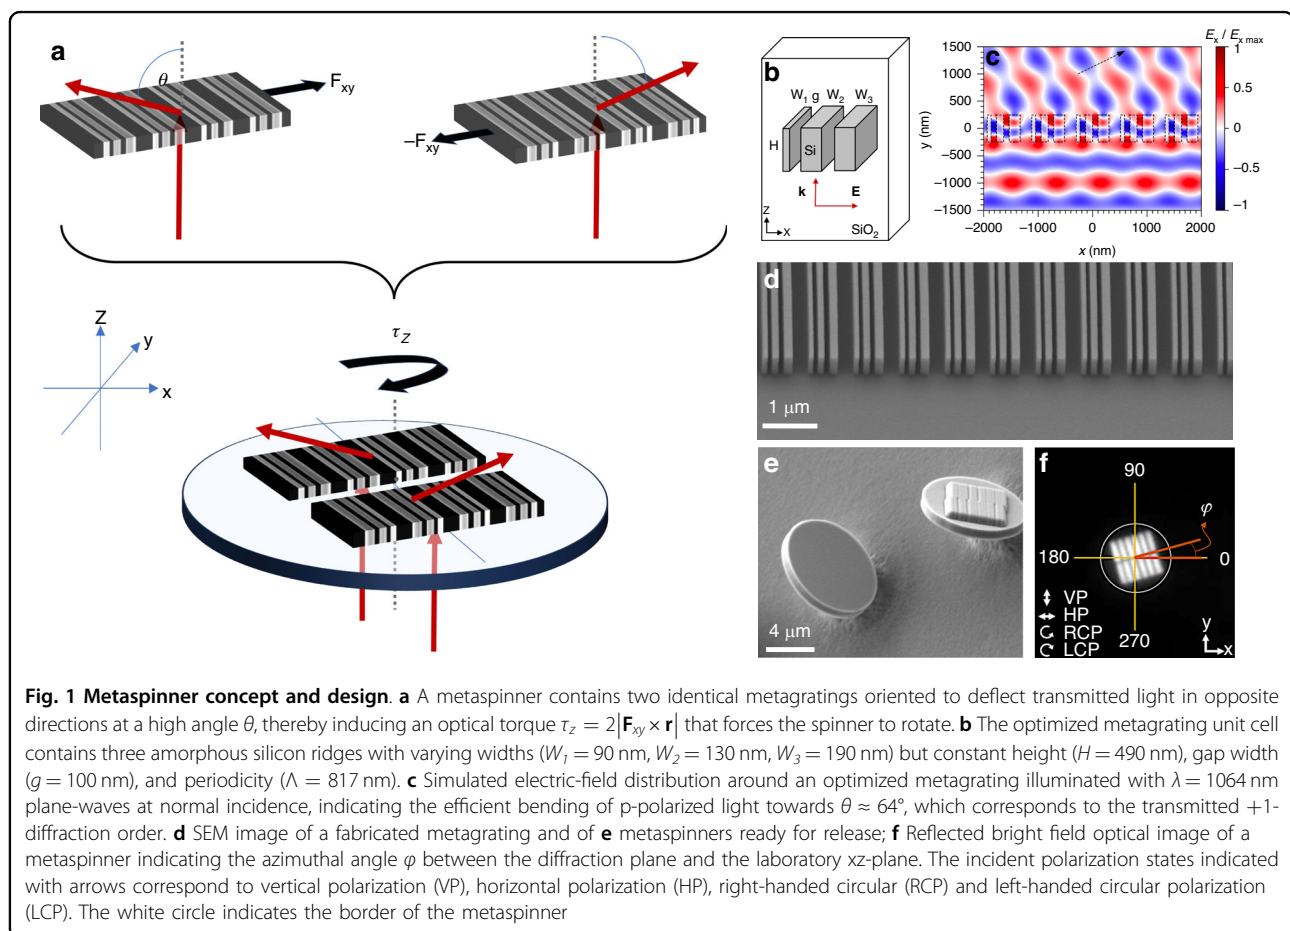

efficiency, and by the incident power, and can be used to propel the metasurface within the lateral (xy) plane⁴⁰. If two such metasurfaces are oriented in opposite directions and then joined together in a single rigid body, the reaction forces instead generate a torque $\tau_z \hat{z} = 2\mathbf{F}_{xy} \times \mathbf{r}$ because of the non-zero lever arms \mathbf{r} to the common center of mass (c.o.m). This torque is due to optical orbital angular momentum transfer, since it does not involve the intrinsic angular momentum (spin) of light, and it can be used to rotate the metaspinner around its c.o.m.

We fabricated 8 μm diameter metaspinner with a thickness of $\sim 1 \mu\text{m}$ by a combination of electron beam lithography and etching (see Methods). Each metaspinner contains two oppositely oriented $4.65 \times 2.5 \mu\text{m}^2$ amorphous silicon (aSi) metagratings embedded in SiO_2 . The unit cell (Fig. 1b) was optimized for p-polarized directional diffraction at a wavelength of $\lambda = 1064 \text{ nm}$ using electrodynamic simulations and measurements on large samples (see Methods and Supplementary Information Figs. S1 and S2). An optimized metagrating contains three aSi ridges per unit cell and has a periodicity corresponding to a deflection angle of $\theta = 64^\circ$ in SiO_2 . Figure 1c shows a calculated near-field profile for this case, illustrating the effective bending of an incident plane wave towards the main diffraction direction (defined as the +1 transmitted order) while Fig. 1e shows a scanning electron microscope (SEM) image of a fabricated sample. The structures are two-dimensionally chiral (point group C_{2h}), which implies that a metaspinner can be designed to rotate either clockwise (CW, left-handed (LH) structure) or counterclockwise (CCW, right-handed (RH) structure), but the handedness reverses if a metaspinner is turned upside down. Although each metagrating in a spinner only contains six periods of the unit cell, we find that the resulting orbital torque suffices to cause a strong spinning motion.

Rotation dynamics of individual metaspinner

After being released from the substrate, the metaspinner were dispersed in water and a droplet of the solution was injected into a thin liquid cell mounted on an inverted microscope (Supplementary Fig. S3). The driving laser beam was loosely focused to a Gaussian spot (FWHM = 25.4 μm) and controlled in power and polarization. For sufficient power, the classical optical gradient force was found strong enough to enable 2D trapping and lateral manipulation of metaspinner that had sedimented at the bottom of the liquid cell. Figure 2a, b (Supplementary Video S1 and S2) shows examples of LH and RH metaspinner rotating in the CW and CCW directions, respectively, after being trapped at the beam center. These spinner rotate with their flat sides (Fig. 1e) towards the bottom of the liquid cell. Metaspinner that sedimented in

a flipped orientation rotate in the opposite direction, as expected, though with lower speed and with slightly wobbling motion due to the increased and spatially varying friction against the supporting substrate.

We tracked the position and angular orientation of several metaspinner using video microscopy. For linear polarization and an incident intensity of $I \approx 75 \mu\text{W} \cdot \mu\text{m}^{-2}$, corresponding to $P_0 \approx 0.87 \text{ mW}$ of incident power per metagrating, we found an average rotation frequency of $f = 3 \pm 0.3 \text{ Hz}$ (Fig. 2c). We interpret the spread in spinning performance as mainly due to slight variations in structure morphology, which can affect both the optical properties of the metagratings as well as the effective rotation drag and friction against the substrate.

The rotation equation of motion of a metaspinner can be written as $J\dot{\varphi}(t) = \tau_{opt}(t) - \gamma_r\dot{\varphi}(t) + \tau_s(t)$, where φ is the angle between the metagrating diffraction plane and the laboratory x-axis (Fig. 1f), J is the moment of inertia, γ_r is the rotation friction coefficient, and τ_{opt} and τ_s are the optical and the stochastic thermal torques, respectively. At the low Reynolds numbers relevant here ($Re \sim 10^{-4}$), inertial effects are small while Brownian diffusion is hardly noticeable. Hence, the equation of motion approximately simplifies to $\dot{\varphi}(t) = \tau_{opt}(t)/\gamma_r$.

Figure 2d shows the angular evolution $\varphi(t)$ of the RH metaspinner in Fig. 2a for four distinct polarization states. These differ drastically, with right-handed circular polarization (RCP) producing the fastest evolution, left-handed circular polarization (LCP) the lowest, and the two linear polarizations producing an intermediate and almost equal result. However, whereas $\varphi(t)$ evolves smoothly for circular polarization, linear polarization breaks the in-plane symmetry as the metaspinner rotates and therefore results in periodic oscillations that are phase-shifted by 90 deg. between horizontal (HP) and vertical (VP) polarizations. These effects are more clearly seen if data collected over several cycles is condensed in plots of angular speed versus angle $\dot{\varphi}(\varphi)$ (Fig. 2e), which according to the above is a measure of the angular variation of the optical torque.

To interpret the rotation dynamics, we developed an approximative model based on the assumption that the metagratings comprising a spinner behave as non-interacting ideal gratings excited by a plane wave (see Supplementary Text for a derivation). The optical torque is obtained by adding an orbital and a spin contribution, $\tau_{opt} = \tau_{orb} + \tau_s$, where the latter is obtained by projecting the spin torque produced by the outgoing diffracted waves on the z-axis and subtracting this value from the spin torque produced by the incident field: $\tau_s = \tau_{s,in} - \tau_{s,out}$.

For HP and a RH metaspinner, we find $\tau_{orb}^{HP}(\varphi) = 2r \frac{n}{c_0} P_0 \sum_i (T_{p,i} \cos^2(\varphi) + T_{s,i} \sin^2(\varphi)) \sin(\theta_i)$, where r is the length of the lever arm (Fig. 1a), P_0 is the incident power per metagrating, n the refractive index of the surrounding medium, c_0 the speed of light, and $T_{p,i}$ and $T_{s,i}$

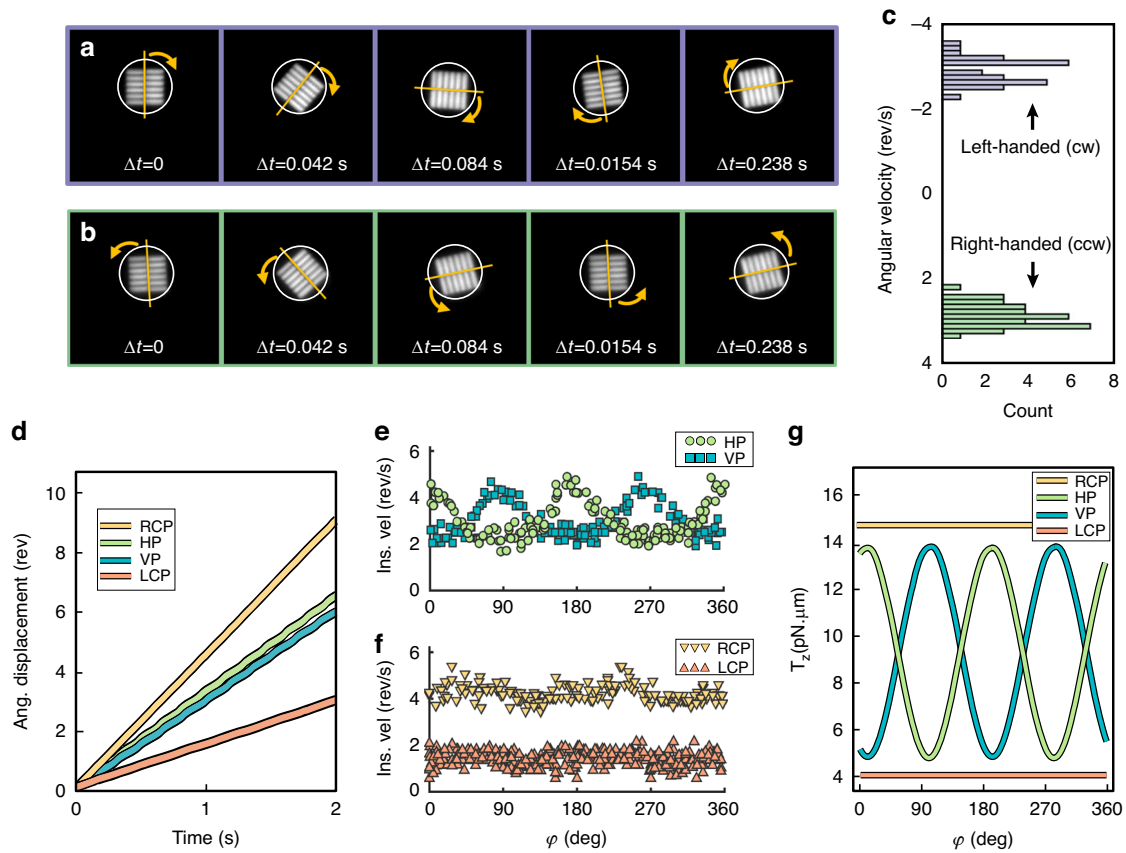


Fig. 2 Rotation dynamics of individual metaspinner. **a** Left-handed (LH) and **b** right-handed (RH) metaspinner exhibiting clockwise (CW) and counterclockwise (CCW) rotation, respectively, when exposed to linearly polarized light. The periphery of the SiO₂ disks supporting the metagratings are outlined by white circles. See also Supplementary Video S1 and S2. **c** Histogram of rotation frequencies for several LH and RH metaspinner. **d** Angular displacement $\varphi(t)$ of the RH metaspinner for RCP, LCP, HP, and VP incident fields. Here φ signifies the angle between the metagrating diffraction plane and the laboratory x-axis, as indicated in Fig. 1f. **e, f** Angular speed versus orientation $\varphi(\varphi)$ for the four polarization cases, obtained from the data in **d**. **g** Calculated total optical torque versus orientation $\tau_{opt}(\varphi)$ for the four polarization cases from FDTD simulations and Maxwell stress tensor analysis of a RH metaspinner. The experimental data in **a–f** were obtained using a loosely focused $\lambda = 1064$ nm laser beam with peak intensity $\sim 75 \mu\text{W}/\mu\text{m}^2$. The calculated torque in **g** was obtained for plane wave incidence and an intensity of $75 \mu\text{W}/\mu\text{m}^2$

are power efficiencies for p- and s-polarized diffraction into order i with diffraction angle θ_i , respectively. In the present case, we have three transmitted and three reflected orders, but the main contribution to τ_{orb}^{LP} comes from the large difference in p-polarized transmission between order +1 and -1, since this is what the metagratings have been optimized for (Fig. 1a). The $\cos^2(\varphi)$ variation of these contributions then yield orbital torque maxima at $\varphi = 0$ and 180° for HP incidence (90 and 270° for VP), in good agreement with the experimental results.

Circularly polarized incidence is expected to produce angle-independent torques since the metaspinner then always receives the same incident power polarized parallel and perpendicular to the diffraction plane. From the grating model, we have $\tau_{orb}^{RCP} = \tau_{orb}^{LCP} = r \frac{\mu}{c_0} P_0 \sum_i [(T_{p,i} + T_{s,i}) \sin(\theta_i)]$ for a RH spinner, which thus equals the angular average of the

orbital torque for linear polarization $\langle \tau_{orb}^{HP,VP} \rangle$, while the spin torque adds or subtracts an equal amount, $\pm \tau_s$, depending on the incident light handedness. Hence, we expect that the angular average of the total optical torque for linear polarization equals the average of the total RCP and LCP torques:

$\langle \tau_{opt}^{HP,VP} \rangle = \frac{1}{2} (\tau_{opt}^{RCP} + \tau_{opt}^{LCP})$. This prediction is in excellent agreement with the data in Fig. 2d–f, which yield average rotation frequencies $\langle f \rangle$ of ~ 3 Hz for HP and VP, ~ 4.5 Hz for RCP, and ~ 1.5 Hz for LCP. Similarly, the rotation frequencies yield that the spin-to-orbital fraction of the optical torque for circular polarization is $\tau_s/\tau_{orb} = (f^{RCP} - f^{LCP}) / (f^{RCP} + f^{LCP}) \approx 50\%$.

Figure 2g shows simulated torques based on Maxwell's stress tensor calculations for a RH metaspinner exposed to the same incident intensity as in the experiments. The


angular variations and torque ratios are clearly in excellent agreement with the experimental data. However, one notes that the simulations for HP and VP show small shifts of the peak maxima and minima that are not clearly observed there. These shifts originate in $\tau_{s,out}$, which exhibits an angular variation proportional to $\sin(2\varphi)$ but tends to zero at high diffraction angles. For the same reason, the dominant contribution to τ_s for circular polarization comes from the incident spin torque, $\tau_{s,in} = \pm \frac{2}{n\omega} P_0$.

Photothermal effects and flow profile

The calculated torques in Fig. 2g allow us to estimate the rotation drag coefficient by comparison to the measured rotation frequencies. For the incident intensity used ($75 \mu\text{W}/\mu\text{m}^2$), one finds $\gamma_r = \tau_{opt}/2\pi f \approx 0.5 \cdot 10^{-18} \text{ Nm}\cdot\text{s}$, which is close to what is expected for a thin disk with the same radius as a metaspinner and rotating in room-

temperature water ($\gamma_r = \frac{32}{3}\eta r^3 \approx 0.7 \cdot 10^{-18} \text{ Nm}\cdot\text{s}$ for $r = 4 \mu\text{m}$ and viscosity $\eta = 1 \text{ mPa}\cdot\text{s}$). However, estimating γ_r is complicated by photothermal heating, which decreases η , and by the presence of the supporting surface, which introduce hydrodynamic interactions.

We measured the rotation frequency of a RH metaspinner as a function of applied intensity to quantify the influence of photothermal heating. As shown in Fig. 3a (triangles and corresponding dashed line), $f(I)$ increases much faster than what is expected from the linear increase in optical torque with intensity. We can then estimate the temperature excess by comparing the measured $f(I)$ to a linear extrapolation from the lowest intensities. We thus assume that the supralinear variation is solely caused by a decrease in $\gamma_r \propto \eta(T)$, due to heating of the water surrounding the metaspinner, and that heating is negligible at low I . This gives that f is a factor 2–3 higher than the interpolation at the highest

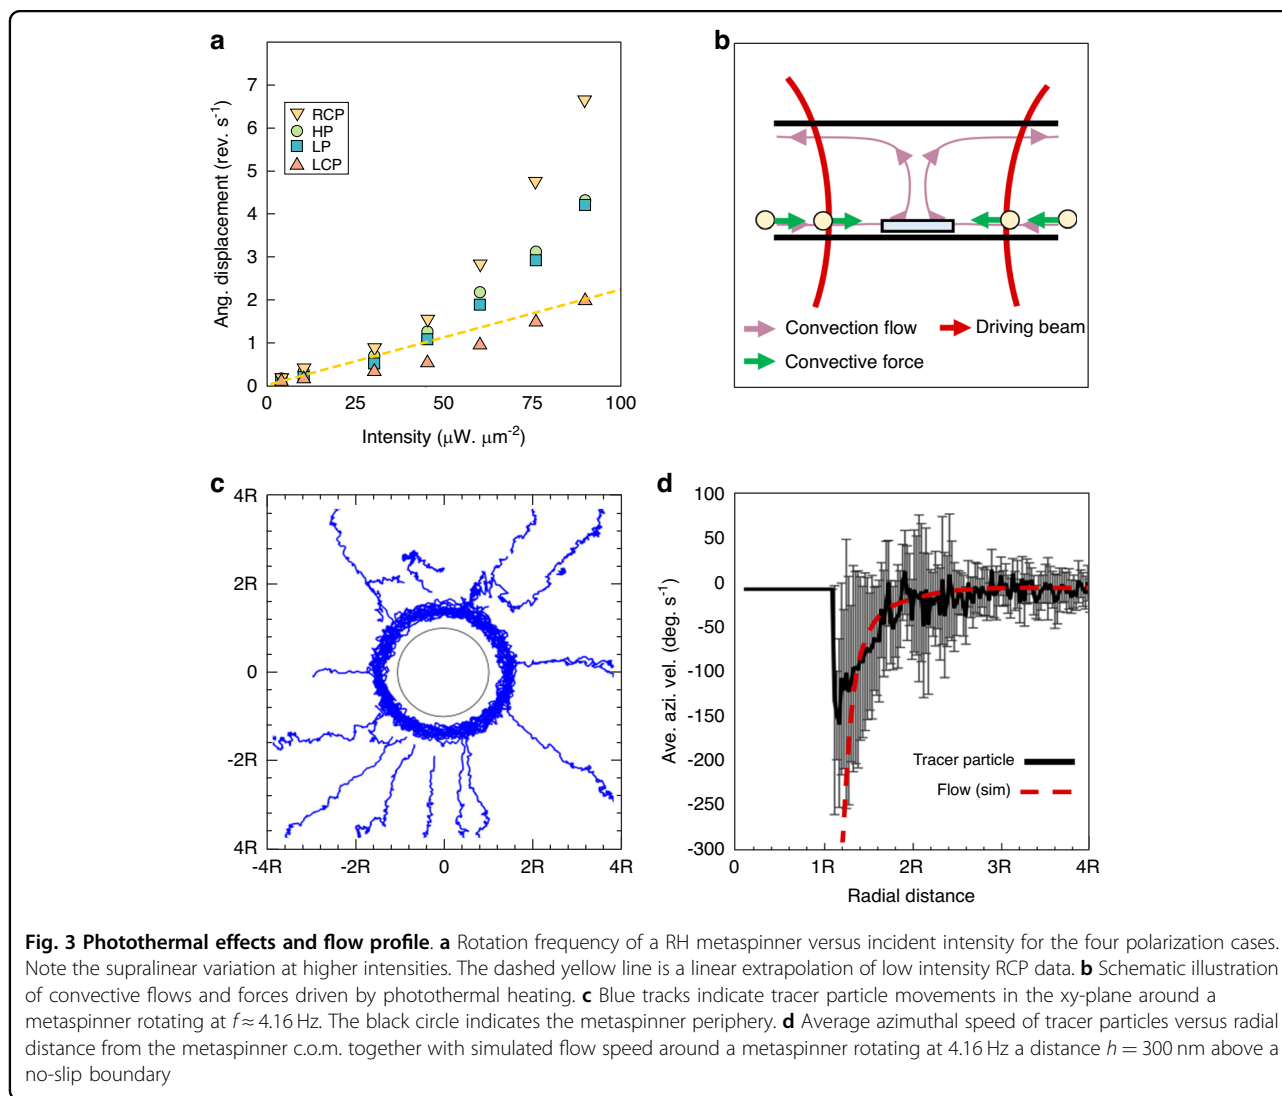

intensities, indicating substantial heating and a temperature excess of the order $\sim 40\text{--}60\text{ K}$ close to the metaspinner, in reasonable agreement with finite element simulations (Supplementary Fig. S4).

The thermal density gradient in the water surrounding a photothermally heated metaspinner is expected to cause a convective flow, as indicated in Fig. 3b. To test this, a diluted solution of $1\text{-}\mu\text{m}$ polystyrene beads was dispersed in the sample cell and the movement of beads residing on the supporting substrate in the vicinity of a metaspinner rotating at $f \approx 4.16\text{ Hz}$ ($I \approx 90\ \mu\text{W}\cdot\mu\text{m}^{-2}$) were tracked by video microscopy (Supplementary Video S3). As summarized in Fig. 3c, the beads are indeed driven radially towards the metaspinner, as expected for convective flow, but they acquire an azimuthal speed component in the direction of the spinning motion as they get close to the metaspinner edge. However, as shown in Fig. 3d, the azimuthal movement is very slow compared to the metaspinner rotation (maximum average rotation frequency $\approx 0.4\text{ Hz}$ for beads $< 0.3\ \mu\text{m}$ from the metaspinner edge). No directed bead movement is observed unless a metaspinner is confined to the beam center (Supplementary Video S4), which implies that optical gradient forces have negligible influence on the bead traces and that the convective flow is driven by photothermal heating of the metaspinner rather than of the surrounding environment.

We performed fluid dynamics simulations that included a no-slip boundary at a distance h below a rotating metaspinner to interpret the azimuthal bead movement (see Methods). For realistic gap distances ($100 < h < 400\text{ nm}$)⁴², the boundary is found to significantly suppress the flow compared to the case of a uniform water environment (Supplementary Fig. S5). This is illustrated in Fig. 3d (red dashed line), which shows that the simulated flow speed within the plane of a metaspinner rotating at 4.16 Hz at $h = 300\text{ nm}$ closely matches the measured radial variation in azimuthal bead speed and essentially vanishes a radius away from the metaspinner edge.

Dynamics of a pair of metaspinner and the transverse lateral gradient force

We next investigated the dynamics of pairs of metaspinner trapped side by side in the Gaussian beam. From the bead experiments (Fig. 3c), we expected that the hydrodynamic flow generated by one metaspinner would push its neighbor in the spinning direction, which in the case of two co-rotating metaspinner should result in an orbital motion in the same direction as the spinning motion. However, as summarized in Fig. 4, we observe the *opposite* behavior.

Figure 4a, b (Supplementary Video S5 and S6) illustrate the anomalous orbital motion for the case of pairs of LH and RH metaspinner excited with $75\ \mu\text{W}/\mu\text{m}^2$ HP

illumination. The particles individually spin in the CW and CCW directions, respectively, but orbit each other in the opposite directions. The spinning frequencies are lower than for single metaspinner since the particles are now further away from the beam center, located close to the center of the orbital track, and the orbital rotation frequencies Ω are considerably lower than the spinning frequencies ($\Omega/f = 5\text{--}6\%$ in Fig. 4a, b). Photothermal heating causes a supralinear increase in spinning and orbital rotation frequencies with increasing intensity but does not affect the direction of motion (Supplementary Fig. S6).

To understand this effect, we first examined hydrodynamic and mechanical interactions for pairs of co-rotating metaspinner. We found that tracer beads follow the direction of fluid flow expected from the spinning direction of the individual metaspinner in a pair (Fig. 4c, Supplementary Video S7). The flow around one metaspinner will thus indeed push its neighbor *in* the spinning direction, as anticipated. Hence, the hydrodynamic interaction cannot explain the anomalous orbital motion. Similarly, a mechanical interaction mechanism can be ruled out based on experimental observations. This is illustrated in Supplementary Fig. S7 and Supplementary Video S8, which shows two RH metaspinner that are initially orbiting in the opposite direction to their spinning motion, as in Fig. 4b, then becomes attached to each other, and finally begin to orbit in the same direction as their initial spinning motion, similar to two interconnected co-rotating gears. Finally, we examined pairs of counter-rotating metaspinner. In this case, the two particles also attempts to orbit in the opposite direction to their respective spinning directions, but since this is not possible due to mutual steric hindrance, the pair remains essentially stationary (Supplementary Fig. S8 and Supplementary Video S9).

To elucidate the optical forces affecting the metaspinner in a pair, we first consider the classical optical gradient force, F_{grad} , which here acts to pull a metaspinner laterally towards the center of the Gaussian beam. Experiments on SiO_2 disks of the same dimensions as the metaspinner but without aSi metagratings showed radial movement of the disks towards the beam center due to F_{grad} as expected, but no orbital movement (Supplementary Fig. S9). However, since two nominally identical metaspinner in a pair cannot both occupy the beam center, they will position themselves symmetrically with their edges close to the center and with their metagratings always exposed to the Gaussian intensity gradient. Hence, the photon recoil forces generated in the metagratings comprising a metaspinner will be unbalanced and therefore not only induce an orbital torque, but also a resultant net force $F_{c.o.m.}$ acting on the metaspinner center of mass (Supplementary Fig. S10). As outlined in the Supplementary Text for a RH metaspinner subject to an

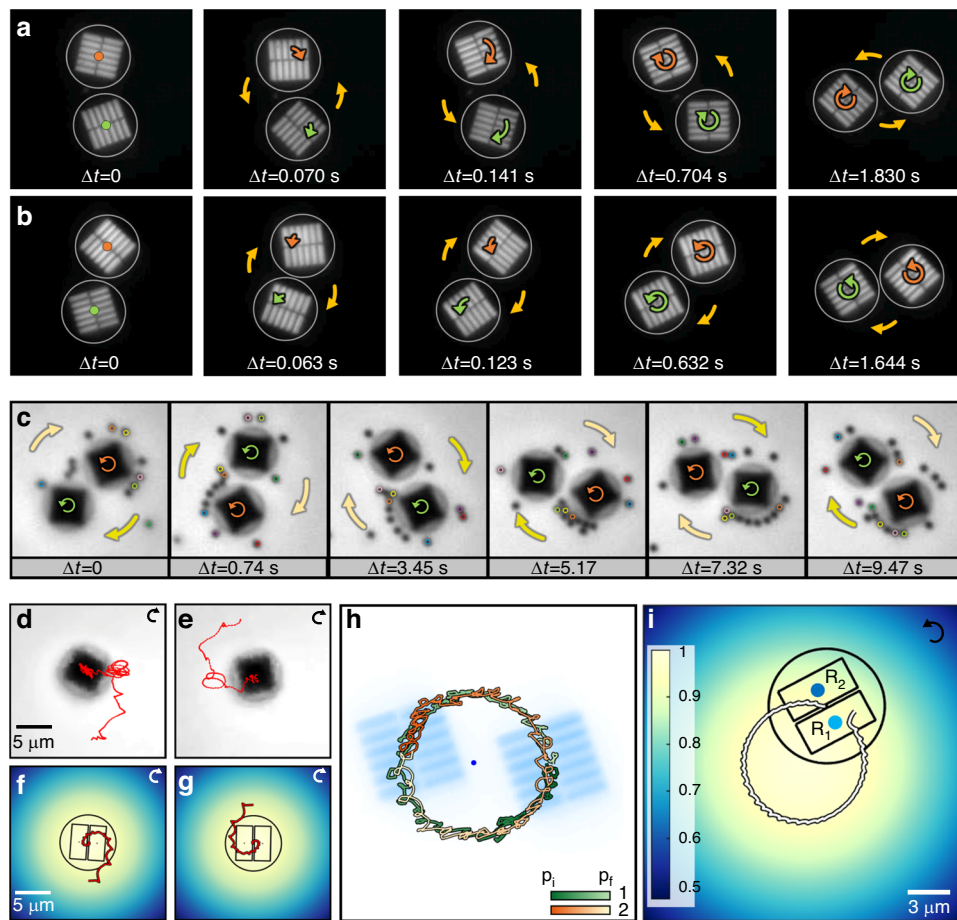


Fig. 4 Orbital dynamics of pairs of metaspinners. Two metaspinners rotating in the CW (a) and CCW (b) directions but orbiting each other in the opposite directions (see also Supplementary Video S5 and S6). **c** Movement of tracer particles around two metaspinners exhibiting simultaneous CCW rotation but CW orbiting. The particles follow the flow induced by the CCW rotation of the individual metaspinners, demonstrating that their orbital motion is not caused by hydrodynamic interactions (see also Supplementary Video S7). **d, e** Tracking of single CW rotating metaspinners being pulled towards the center of the beam due to the classical optical gradient force. Note the CCW orbital motion originating in the transverse lateral gradient force. **f, g** Simulated trapping dynamics of single CW rotating metaspinners. The yellow hue indicates the extension of the Gaussian laser beam. **h** Tracking of two CCW rotating metaspinners making a full CW orbit around the beam center. The starting (p_i) and final (p_f) positions of the metaspinners are indicated as colors hues in the figure. **i** Simulated track of a single CCW rotating metaspinner that is constrained to move outside a radius of $4.1 \mu\text{m}$ from the center of the beam (see also Supplementary Video S10). The initial position and orientation of metaspinner 1 in **h** were used in the model

intensity gradient dI/dx in the \hat{x} -direction, one finds $\mathbf{F}_{c.o.m.} = C \cdot \{1 \cdot \hat{y} + (\sin(2\varphi)\hat{x} - \cos(2\varphi)\hat{y})\}dI/dx$, where C is a positive definite constant determined by polarization and metagrating diffraction properties. $\mathbf{F}_{c.o.m.}$ contains two distinct components: a *transverse lateral gradient force* \mathbf{F}_{trans} that always points perpendicular to the intensity gradient, and a component that varies with metaspinner orientation φ but does not lead to a net displacement of its c.o.m. For the RH metaspinner and for $dI/dx > 0$, $\mathbf{F}_{c.o.m.}$ will lead to a continuous displacement in the positive \hat{y} -direction, due to \mathbf{F}_{trans} , and this motion will be superimposed on a circular, or in general, elliptical track due to the second component of $\mathbf{F}_{c.o.m.}$. A LH metaspinner will instead displace in the negative \hat{y} -direction. Hence, the direction of \mathbf{F}_{trans} is

determined by the metaspinner handedness, and thereby its spinning direction, and it will always be perpendicular to the intensity gradient. In a radially symmetric Gaussian intensity distribution, \mathbf{F}_{trans} will instead manifest itself as an apparent azimuthal torque with respect to the beam center, forcing the metaspinner to orbit in the direction opposite to its spinning motion, as observed experimentally.

Based on the analysis above, we simulated metaspinner movements under the assumption that optical forces and torques, viscous drag, and steric hindrance dominate particle dynamics (see Methods). The simulations were performed for a linearly polarized Gaussian beam with parameters as in the experiments and utilized FDTD data to estimate the strength of the optical forces and torques,

while the rotation and translation drag coefficients served as fitting parameters. As shown in Fig. 4d, e, a single LH metaspinner rotating clockwise and initially positioned at the periphery of the Gaussian intensity distribution is seen to gradually spiral towards the beam center while exhibiting a counterclockwise orbital movement, that is, in the opposite direction compared to its spinning motion. These effects are captured rather well in the dynamic simulations (Fig. 4f, g) and are caused by the joint action of F_{grad} and $F_{c.o.m.}$. The effect of steric hindrance can be approximately simulated by preventing the metaspinner c.o.m. to enter a circular area around the beam center with the same radius as the pair orbit observed experimentally. Figure 4i (Supplementary Video S10) illustrates this case for a RH metaspinner representing one of the particles in the co-rotating pair shown in Fig. 4h. In this case, a full clockwise orbital path is observed, as expected

from the counterclockwise spinning motion of the particles.

Dynamic aggregates of co-rotating metaspinners

The interplay between optical forces and steric hindrance leads to fascinating dynamic structure patterns when several metaspinners self-assemble in a Gaussian beam. Figure 5 (Supplementary Video S11) shows examples of $n = 3-7$ co-rotating RH metaspinners subject to a linearly polarized beam. While each individual metaspinner rotates in the CCW direction, with the particles closest to the beam center rotating the fastest, the aggregates again exhibit orbital motion in the opposite direction due to F_{trans} . The structure patterns are essentially close-packed, but the particles dynamically change position within an aggregate. This is exemplified by the $n = 4$ case, where the “blue” metaspinner initially occupies

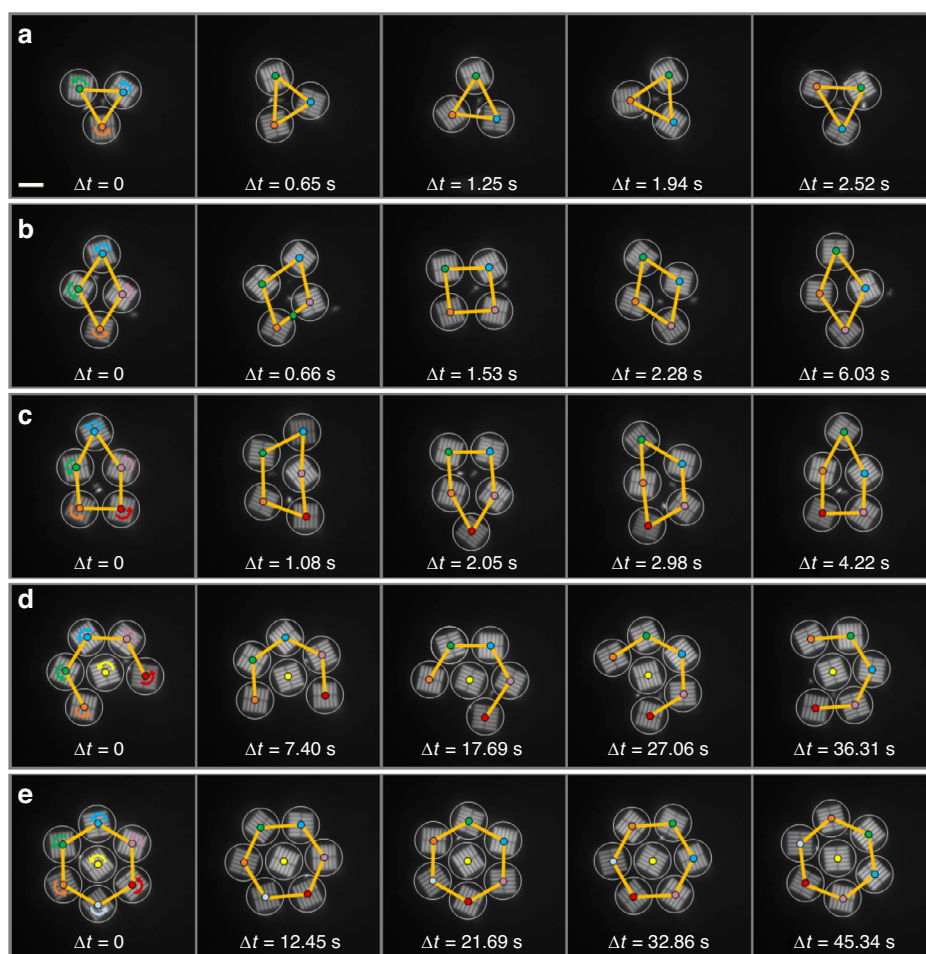


Fig. 5 Dynamic aggregates of co-rotating metaspinners. Progressive snapshots of RH metaspinners self-assembled in a horizontally polarized Gaussian beam. Each particle spins in the counterclockwise direction but collectively orbits the beam center in the opposite direction due to the transverse lateral gradient force. The laser peak intensity is $I \approx 75 \mu\text{W}\cdot\mu\text{m}^{-2}$ in **a–c** but lowered to $I \approx 30 \mu\text{W}\cdot\mu\text{m}^{-2}$ in **d, e** to decrease photothermal heating effects. The beam width (with FWHM = $25.4 \mu\text{m}$) is the same as in Figs. 2 and 4. The arrows in the first column indicate the CCW direction of rotation of each metaspinner while the colors indicate particle identity

a position at the apex of the diamond shaped structure but then moves clockwise to a position along the short diagonal. An exception is when a particle manages to occupy the central position in a complete ($n=7$) or almost complete ($n=6$) hexagonal aggregate, where the gradient forces vanish and steric repulsion from the neighboring particles balances out.

Discussion

In summary, we fabricated ultrathin untethered optically driven microscopic rotors – metaspinner – that generate torque by deflecting light in opposite directions via a lever arm through the action of two optical metasurfaces. We analyzed the optical, hydrodynamic, and photothermal properties of the structures and found that their rotational dynamics could be quantitatively explained by considering spin and orbital angular momentum transfer from the incident and deflected light together with the rotational drag caused by the surrounding liquid and supporting substrate. Moreover, we investigated pairs and larger aggregates of co-rotating metaspinner confined to a single Gaussian laser focus and found that such systems collectively orbit the optical axis in the opposite direction to the spinning motion of the individual metaspinner. This surprising effect could be explained by considering the unbalanced photon recoil forces that appear when the metasurfaces comprising a metaspinner is exposed to an intensity gradient, which results in a transverse lateral gradient force that is perpendicular to the classical optical gradient force and whose direction is determined by the metaspinner handedness.

The close-packed particle arrangements observed when several metaspinner are confined to a laser focus are similar to structures previously observed in systems of untethered microrotors coupled through hydrodynamic interactions and, as recently reported, through optical binding⁴⁶. In the latter case, strong optical interactions between the individual nanoscopic rotors lead to phase synchronization of their spinning motions. However, no such effect is observed in the present system, that is, individual metaspinner that are located at the same radial distance from the beam center may exhibit very similar spinning frequencies but there is no clear phase correlation between their angular evolutions. This is expected since the diffracted fields emanating from the metagratings within a spinner propagate out-of-plane, implying that the in-plane optical interactions are weak in the present case.

The dynamic interaction between rotating microrotors submerged in a fluid has been the subject of intensive research directed at providing fundamental insights on the interplay between different microscale forces^{1,2,46–48}. To the best of our knowledge, all previous studies have

found that when two untethered but interacting rotors spin in the same direction, the result is an orbital motion in the same direction as the spinning motion. The opposite behavior observed here opens for interesting studies of, for example, active matter systems in which particle interactions are dominated by steric hindrances and particle trajectories are controlled by optical forces. Such studies would not necessarily have to involve optical intensity gradients since the unbalanced recoil forces behind the transverse lateral gradient force could equally well be generated by incorporating metagratings of different area or efficiency in a single metaspinner.

We note that the transverse lateral gradient force observed in this work for the case of two-dimensionally chiral metaspinner bears some resemblance to the transverse lateral optical force that can be observed when a small particle near an interface is exposed to an evanescent field^{49,50}. Indeed, in the latter case, either the particle or the field needs to be chiral, such that a transverse force component is induced through spin-orbit coupling, though more work is required to establish to what extent the two effects can be explained within the same framework.

The present study utilized two oppositely directed metagratings to generate torque. Though effective, it is likely that even more efficient torque-generating structures could be found by considering metasurfaces with lower symmetry, such as spiral patterns of directional optical antennas. In the ideal case, such an optically thin structure should deflect an incident plane wave at 90 degrees in the azimuthal direction at each area element, thereby maximizing orbital angular momentum generation. However, the global optimization of such a structure, many microns in diameter, based on full Maxwell stress tensor analysis, remains a grand challenge.

Metaspinner, or similar ultrathin metasurface-based rotors, could have interesting applications in biophysics research and applications. For example, a metaspinner, properly biofunctionalized on its flat unstructured face, could be used as a torque transducer to measure elastic and torsional properties of artificial cell membranes and, possibly, even whole cells. Furthermore, metaspinner could be used as optical stirrers or rheological sensors in microfluidic environments and devices. Here it is worthwhile to point out that the in-plane size and shape of the rotor can be easily adapted to the application needs. For example, a rotor could be equipped with protrusions able to collect small particles, such as bacteria, erythrocytes, or yeast cells, while simultaneously bringing in nutrients and dissolved gases from its photothermally induced convective flow.

Finally, optical torque-generating metasurfaces analogous to those considered here could be utilized to construct optically driven micromachinery, in which case

individual rotors would need to be fixed to low friction shafts and connected through cogwheel mechanical interactions. Apart from the advantage of being able to remotely control such gear trains exclusively by light intensity and polarization, the extremely thin metasurface format implies that friction losses to viscous environments are minimized and, consequently, more energy can be spent on the intended mechanical transduction.

Materials and methods

Metagrating design and characterization

The metagratings contained within each metaspinner were optimized based on a combination of electromagnetic simulations using FDTD (Ansys Lumerical) and measurements on samples with areas large enough to determine diffraction efficiencies in transmission. Based on initial simulations and considering fabrication constraints, we settled for metagratings with three ridges and fixed periodicity ($\Lambda = 817$ nm), corresponding to a diffraction angle in SiO_2 of 64 deg. The ridge widths (W_1, W_2, W_3), the gap distance (g), and the ridges height (H) were then optimized to yield the highest transverse momentum transfer for normally incident p-polarized plane wave illumination at $\lambda = 1064$ nm. The simulations were based on appropriate boundary conditions, an aSi refractive index of $n_{\text{aSi}} = 3.8$, and a uniform silica environment of $n_{\text{SiO}_2} = 1.45$. Based on the result, a set of samples with parameters varying around the optimum were fabricated and analyzed using the setup shown in Supplementary Fig. S1, resulting in the parameter set chosen for metaspinner fabrication: $W_1 = 90$ nm, $W_2 = 130$ nm, $W_3 = 190$ nm, $g = 100$ nm, and $H = 490$ nm. The corresponding measured power diffraction efficiencies in transmission for p- and s-polarization are shown in Supplementary Fig. S2.

Nanofabrication

Metaspinners were fabricated on 4-inch Si wafers coated with 390 nm thermally grown SiO_2 . A 490 nm aSi layer was deposited using low-pressure chemical vapor deposition at 550 °C and the metagrating patterns were defined in an EBL process that included spin coating a positive resist (ARP6200.13), baking at 160 °C for 4 min, exposure at $310 \mu\text{C cm}^{-2} / 10$ nA, and development for 3 min. A 60 nm Ni layer was then evaporated and lifted off to act as a hard mask. To transfer the metagrating pattern to the aSi layer, two steps of reactive-ion etching were performed, using Cl_2 (50 sccm HBr, 10 mtorr and 50/100 W) and HBr (40 sccm HBr, 1.5 mtorr and 340/250 W), respectively. The remaining hard mask was removed through a wet etching process. The next fabrication step defined the body of the metaspinners and involved coating the metagratings with a 610 nm thick SiO_2 layer using plasma-enhanced chemical vapor deposition (PECVD) and a second EBL step using the same parameters as above. After development, hard mask

evaporation, and lift-off, the SiO_2 was etched using CHF_3 (12 sccm CHF_3 and 17 sccm Ar, 5 mtorr, 580/50 W ICP/FW) and the residual hard mask was removed by wet etching. Finally, the metaspinners were released and dispersed in water through an 8 min. isotropic etching process using SF_6 gas (50 sccm SF_6 , 20 mtorr, 350/15 W ICP/FW). The complex refractive index of aSi was measured through ellipsometry and found to be $n \approx 3.8 + i0.0064$ at 1064 nm.

Simulations of optical torques

We used the Maxwell stress tensor to calculate the torques acting on a metaspinner situated in a uniform medium with the refractive index of water ($n = 1.33$). The metaspinner consisted of two aSi metagratings, with parameters as in the optimized fabricated samples, enclosed by a cylindrical SiO_2 disk with diameter 8 μm and thickness 1 μm . Electromagnetic simulations based on FDTD (Ansys Lumerical) utilized perfectly matched layer boundary conditions and a source field with wavelength $\lambda_0 = 1064$ nm and a Gaussian intensity distribution with beam diameter as in the experiments (FWHM = 25.4 μm). Polarization was either linear or circular in the xy-plane and the metaspinner was positioned in the center of the beam.

Simulations of flow fields and rotation drag

We performed computational fluid dynamics simulations using the Rotating Machinery, Laminar Flow interface in COMSOL Multiphysics. The cylindrical computation volume had diameter 150 μm and height 40 μm and a metaspinner is represented by a cylinder of diameter 8 μm and thickness 1 μm located centrally at a vertical distance h from the bottom interface in water. We used no-slip boundary conditions for the metaspinner surface and for the top and bottom of the computation volume, while sidewall boundaries allowed for fluid inflow and outflow. The simulations involve two mesh domains connected by a flow continuity condition: a moving inner domain containing the metaspinner and a stationary outer domain for the remaining volume. The rotation drag for a certain d is obtained by setting the rotation frequency for the inner domain and calculating the resulting torque on the fluid by integrating the viscous shear stress over the domain surface. Water is considered incompressible and is characterized by dynamic viscosity $\eta = 1$ mPa·s and density $\rho = 10^3$ kg/m³.

Simulations of photothermal heating

The temperature distribution around a metaspinner was estimated by considering the aSi gratings as the sole sources of photothermal heating and by using a complex refractive index $n_{\text{aSi}} = 3.8 + i0.0064$ obtained from ellipsometry measurements. The corresponding heat source

density Q was derived from simulations of absorption cross-sections obtained through FEM calculations in COMSOL. We accounted for both heat conduction and convection and used room temperature (293 K) as the boundary condition. For aSi, we utilized a thermal conductivity of 1.8 W/m-K and a density of 2329 kg/m³.

Simulations of metaspinner dynamics

We simulated the dynamics of a metaspinner situated in a linearly polarized Gaussian beam with the same parameters as in the experiments by iteratively solving the equations of motion in the xy -plane. To simplify, we disregarded inertial effects and stochastic forces, and we also omitted the small spin contribution to the optical torque. The equations of motion then simplify to $\mathbf{F}_{opt} = \gamma_t \dot{\mathbf{r}}_{c.o.m.}$ and $\tau_{opt} = \tau_{orb} = \gamma_r \dot{\varphi}$, where γ_t and γ_r are the translation and rotation drag coefficients, $\dot{\mathbf{r}}_{c.o.m.}$ is the speed of the metaspinner center of mass, and $\dot{\varphi}$ is its angular speed. Based on the discussion in the Supplementary Text, the lateral optical force can be expressed as $\mathbf{F}_{opt} = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_{grad}$, where \mathbf{F}_1 and \mathbf{F}_2 are the forces induced on the two metagratings in the metaspinner, while \mathbf{F}_{grad} is the classical gradient force. Similarly, the orbital torque can be expressed as $\tau_{orb} \hat{\mathbf{z}} = (\mathbf{r}_1 - \mathbf{r}_{c.o.m.}) \times \mathbf{F}_1 + (\mathbf{r}_2 - \mathbf{r}_{c.o.m.}) \times \mathbf{F}_2$. The local optical power needed to compute \mathbf{F}_1 and \mathbf{F}_2 were obtained by integrating the Gaussian intensity distribution over the respective metasurface area while the proportionality constant $C_{x-pol}(\varphi)$ was estimated based on comparisons with the FDTD simulations shown in main Fig. 3. Similarly, \mathbf{F}_{grad} was estimated based on FDTD simulations of a SiO₂ disk with the same dimensions as a metaspinner (Supplementary Fig. S9b). The equations of motions were solved iteratively as $\mathbf{r}_{c.o.m.}(t + \Delta t) = \Delta t \cdot \dot{\mathbf{r}}_{c.o.m.}(t) = \Delta t \cdot \mathbf{F}_{opt}(t)/\gamma_t$ and $\varphi(t + \Delta t) = \Delta t \cdot \dot{\varphi}(t) = \Delta t \cdot \tau_{orb}(t)/\gamma_r$, where the time-step Δt was chosen small enough to result in a smooth simulated movement. The rotation and translation drag coefficients in the simulations, $\gamma_r = 5.9 \times 10^{-19}$ J s and $\gamma_t = 7.3 \times 10^{-9}$ kg s⁻¹, respectively, were used as fitting constants to obtain particle speeds similar to those observed experimentally.

Acknowledgements

The authors acknowledge funding from the Knut and Alice Wallenberg Foundation (Grant No. 2016.0353 (MK), grant no. 2019.0079 (GV)). MK acknowledges scientific discussions with Dr. Alexander Stilgoe and Prof. Halina Rubinsztein-Dunlop during a stay at the University of Queensland. All nanofabrication were done at MyFab Chalmers.

Author details

¹Department of Physics, Chalmers University of Technology, 412 96 Gothenburg, Sweden. ²Department of Physics, University of Gothenburg, 412 96 Gothenburg, Sweden. ³School of Science and Technology, Örebro University, 701 82 Örebro, Sweden

Author contributions

EE, MS, and MK conceptualized and designed the research. EE performed optical experiments, analyzed the data, and performed dynamic simulations. MS fabricated and characterized samples and performed thermal and CFD simulations. VM performed FDTD simulations. MK developed the analytical theory with input from PJ. EE and MK wrote the paper with input from all co-authors. MK and GV supervised the study.

Funding

Open access funding provided by Chalmers University of Technology.

Data availability

Data are available from the authors upon reasonable request.

Conflict of interest

The authors declare no competing interests.

Supplementary information The online version contains supplementary material available at <https://doi.org/10.1038/s41377-024-01720-x>.

Received: 19 August 2024 Revised: 8 December 2024 Accepted: 13 December 2024

Published online: 08 January 2025

References

- Grzybowski, B. A., Stone, H. A. & Whitesides, G. M. Dynamic self-assembly of magnetized, millimetre-sized objects rotating at a liquid air interface. *Nature* **405**, 1033–1036 (2000).
- Goto, Y. & Tanaka, H. Purely hydrodynamic ordering of rotating disks at a finite Reynolds number. *Nat. Commun.* **6**, 5994 (2015).
- Gao, W. et al. Artificial micromotors in the mouse's stomach: a step toward in vivo use of synthetic motors. *ACS Nano* **9**, 117–123 (2015).
- Pan, T. et al. Bio-micromotor tweezers for noninvasive bio-cargo delivery and precise therapy. *Adv. Funct. Mater.* **32**, 2111038 (2022).
- Sun, Y., Wang, X. & Yu, J. F. *Field-Driven Micro and Nanorobots for Biology and Medicine* (Cham: Springer, 2022).
- Villangca, M. J. et al. Light-driven micro-tool equipped with a syringe function. *Light Sci. Appl.* **5**, e16148 (2016).
- Smith, G. L. et al. Spider-inspired, fully 3D-printed micro-hydraulics for tiny, soft robotics. *Adv. Funct. Mater.* **33**, 2207435 (2023).
- Kim, S., Kubicek, R. & Bergbreiter, S. 3D-printed electrostatic microactuators for flexible microsystems. *Adv. Funct. Mater.* **33**, 2304991 (2023).
- Zhang, S. L. et al. Reconfigurable multi-component micromachines driven by optoelectronic tweezers. *Nat. Commun.* **12**, 5349 (2021).
- Aubret, A. et al. Targeted assembly and synchronization of self-spinning microgears. *Nat. Phys.* **14**, 1114–1118 (2018).
- Law, J. et al. Micro/nanorobotic swarms: from fundamentals to functionalities. *ACS Nano* **17**, 12971–12999 (2023).
- Lin, C. L. et al. Optically driven Archimedes micro-screws for micropump application. *Opt. Express* **19**, 8267–8276 (2011).
- Zhang, J. C. et al. Reliable grasping of three-dimensional untethered mobile magnetic microgripper for autonomous pick-and-place. *IEEE Robot. Autom. Lett.* **2**, 835–840 (2017).
- Martella, D. et al. Photonic microhand with autonomous action. *Adv. Mater.* **29**, 1704047 (2017).
- Bütaitė, U. G. et al. Indirect optical trapping using light driven micro-rotors for reconfigurable hydrodynamic manipulation. *Nat. Commun.* **10**, 1215 (2019).
- Engay, E. et al. Natural convection induced by an optically fabricated and actuated microtool with a thermoplasmonic disk. *Opt. Lett.* **43**, 3870–3873 (2018).
- Kim, K. et al. Ultrahigh-speed rotating nanoelectromechanical system devices assembled from nanoscale building blocks. *Nat. Commun.* **5**, 3632 (2014).
- Shields, C. W. et al. Supercolloidal spinners: complex active particles for electrically powered and switchable rotation. *Adv. Funct. Mater.* **28**, 1803465 (2018).
- Balk, A. L. et al. Kiloherz rotation of nanorods propelled by ultrasound, traced by microvortex advection of nanoparticles. *ACS Nano* **8**, 8300–8309 (2014).

20. Ashkin, A. et al. Observation of a single-beam gradient force optical trap for dielectric particles. *Opt. Lett.* **11**, 288–290 (1986).
21. Volpe, G. et al. Roadmap for optical tweezers. *J. Phys. Photonics* **5**, 022501 (2023).
22. Allen, L., Padgett, M. J. & Babiker, M. IV the orbital angular momentum of light. *Prog. Opt.* **39**, 291–372 (1999).
23. Franke-Arnold, S., Allen, L. & Padgett, M. Advances in optical angular momentum. *Laser Photonics Rev.* **2**, 299–313 (2008).
24. He, H. et al. Direct observation of transfer of angular momentum to absorptive particles from a laser beam with a phase singularity. *Phys. Rev. Lett.* **75**, 826–829 (1995).
25. Simpson, N. B. et al. Mechanical equivalence of spin and orbital angular momentum of light: an optical spanner. *Opt. Lett.* **22**, 52–54 (1997).
26. Arita, Y. et al. Picoliter rheology of gaseous media using a rotating optically trapped birefringent microparticle. *Anal. Chem.* **83**, 8855–8858 (2011).
27. Bruce, G. D., Rodríguez-Sevilla, P. & Dholakia, K. Initiating revolutions for optical manipulation: the origins and applications of rotational dynamics of trapped particles. *Adv. Phys. X* **6**, 1838322 (2021).
28. Chen, J. et al. Negative optical torque. *Sci. Rep.* **4**, 6386 (2014).
29. Parkin, S. J. et al. Highly birefringent vaterite microspheres: production, characterization and applications for optical micromanipulation. *Opt. Express* **17**, 21944–21955 (2009).
30. Tong, L. M., Mijlković, V. D. & Käll, M. Alignment, rotation, and spinning of single plasmonic nanoparticles and nanowires using polarization dependent optical forces. *Nano Lett.* **10**, 268–273 (2010).
31. Liu, M. et al. Light-driven nanoscale plasmonic motors. *Nat. Nanotechnol.* **5**, 570–573 (2010).
32. Shao, L. et al. Gold nanorod rotary motors driven by resonant light scattering. *ACS Nano* **9**, 12542–12551 (2015).
33. Nan, F. et al. Creating stable trapping force and switchable optical torque with tunable phase of light. *Sci. Adv.* **8**, eadd6664 (2022).
34. Friese, M. E. J. et al. Optical alignment and spinning of laser-trapped microscopic particles. *Nature* **394**, 348–350 (1998).
35. Friese, M. E. J. et al. Optically driven micromachine elements. *Appl. Phys. Lett.* **78**, 547–549 (2001).
36. Loke, V. L. Y. et al. Driving corrugated donut rotors with Laguerre-Gauss beams. *Opt. Express* **22**, 19692–19706 (2014).
37. Galajda, P. & Ormos, P. Complex micromachines produced and driven by light. *Appl. Phys. Lett.* **78**, 249–251 (2001).
38. Kelemen, L., Valkai, S. & Ormos, P. Integrated optical motor. *Appl. Opt.* **45**, 2777–2780 (2006).
39. Magallanes, H. & Brasselet, E. Macroscopic direct observation of optical spin-dependent lateral forces and left-handed torques. *Nat. Photonics* **12**, 461–464 (2018).
40. Bianchi, S. et al. An optical reaction micro-turbine. *Nat. Commun.* **9**, 4476 (2018).
41. Tanaka, Y. Y. et al. Plasmonic linear nanomotor using lateral optical forces. *Sci. Adv.* **6**, eabc3726 (2020).
42. Andrén, D. et al. Microscopic metavehicles powered and steered by embedded optical metasurfaces. *Nat. Nanotechnol.* **16**, 970–974 (2021).
43. Wu, X. F. et al. Light-driven microdrones. *Nat. Nanotechnol.* **17**, 477–484 (2022).
44. Arbabi, A. et al. Dielectric metasurfaces for complete control of phase and polarization with subwavelength spatial resolution and high transmission. *Nat. Nanotechnol.* **10**, 937–943 (2015).
45. Dorrah, A. H. et al. Metasurface optics for on-demand polarization transformations along the optical path. *Nat. Photonics* **15**, 287–296 (2021).
46. Cui, X. M. et al. Synchronization of optically self-assembled nanorotors. *Sci. Adv.* **10**, eadn3485 (2024).
47. Scholz, C., Engel, M. & Pöschel, T. Rotating robots move collectively and self-organize. *Nat. Commun.* **9**, 931 (2018).
48. Modin, A., Ben Zion, M. Y. & Chaikin, P. M. Hydrodynamic spin-orbit coupling in asynchronous optically driven micro-rotors. *Nat. Commun.* **14**, 4114 (2023).
49. Wang, S. B. & Chan, C. T. Lateral optical force on chiral particles near a surface. *Nat. Commun.* **5**, 3307 (2014).
50. Rodríguez-Fortuño, F. J. et al. Lateral forces on circularly polarizable particles near a surface. *Nat. Commun.* **6**, 8799 (2015).